


MUTCD NUMBER NONE

CODE 677A

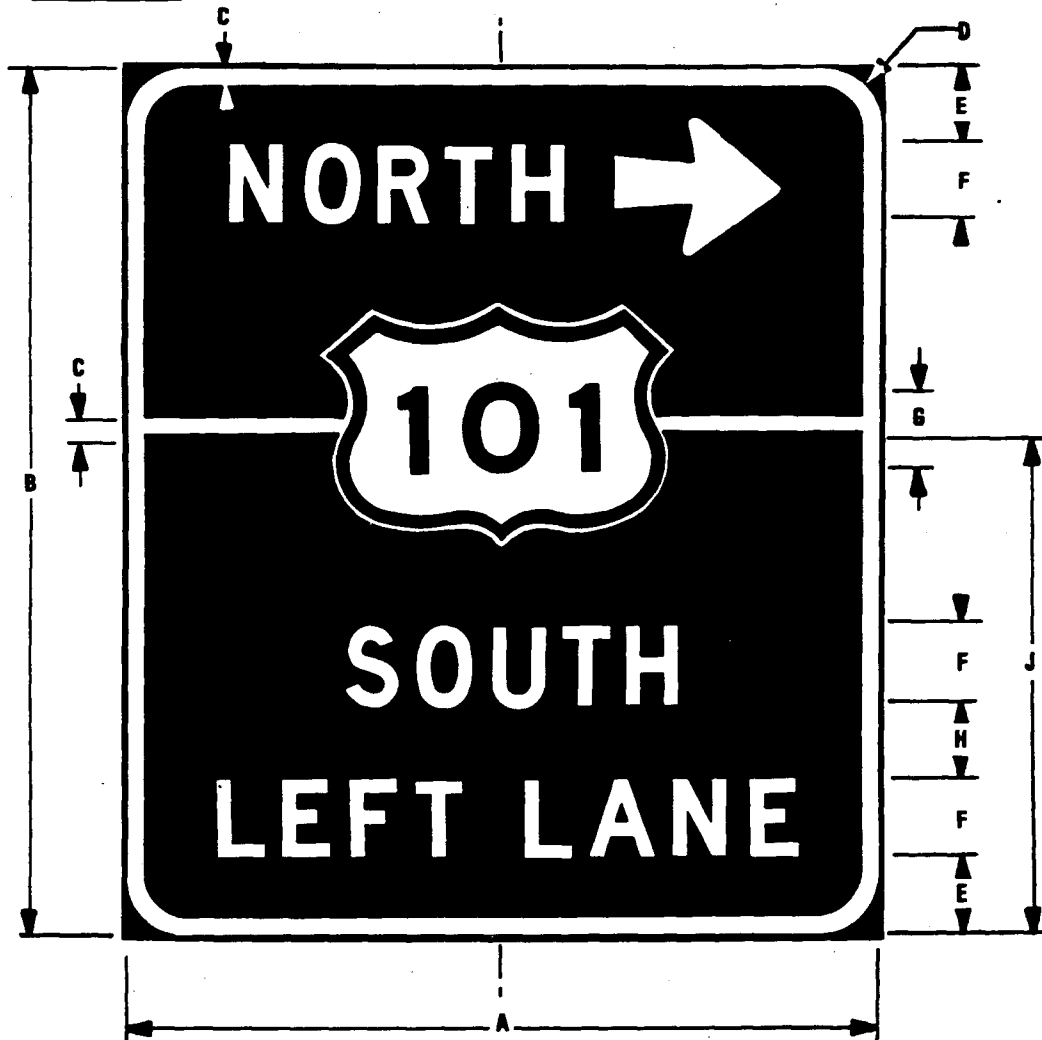

- NOTE: 1. ARROW MAY BE EITHER HORIZONTAL OR DIAGONAL.
 2. ON OVERHEAD MOUNTED SIGNS, WITH LIGHTING AND CATWALKS, BOTTOM BORDER SHALL BE OMITTED.
 3. FOR ARROW DETAILS SEE APPENDIX PAGE 10.
 4. FOR MOUNTING REFER TO STANDARD POST SPACING TABLE.
 5. CENTER SHIELD ON BAR.

| SIGN | DIMENSIONS (INCHES) | | | | | | | | |
|----------|---------------------|-----|-------|----|---|-------|-------|----|--------|
| | A | B | C | D | E | F | G | H | J |
| MINIMUM | VAR | 66 | 1 1/4 | 6 | 6 | 6CAP | 8NUM | 6 | 38 3/8 |
| STANDARD | VAR | 90 | 1 1/2 | 6 | 8 | 8CAP | 10NUM | 8 | 52 1/4 |
| SPECIAL | VAR | 102 | 1 1/2 | 12 | 9 | 10CAP | 10NUM | 10 | 60 1/4 |

COLORS

BORDER & LEGEND - WHITE (REFL)

BACKGROUND - GREEN

THE POLICY FOR INTENDED USAGE OF THIS SIGN IS SHOWN ON REVERSE SIDE.

CR Butler

CHIEF, DIVISION OF TRAFFIC ENGINEERING

6/17/87

DATE

REVISION

REVISION