


### NOTES:


- 1. SEE STANDARD PLAN A76A THROUGH I FOR CONCRETE BARRIER TYPE 60
- 2. LEADING EDGES OF THIS PATTERN SHALL BE ROUNDED, SLOPED OR CHAMFERED

### AESTHETIC TREATMENT CONCRETE BARRIER TYPE 60

NO SCALE



NOTE:
UNDULATIONS CAN BE HORIZONTAL OR
VERTICAL. MAY BE COMBINED WITH
OTHER TEXTURES, FOR EXAMPLE, STACKED
STONE OR SANDBLAST.



MAX 1"

45°CHAMFER
OR FLATTER

NO LIMITS
2" MINIMUM
RECOMMENDED

FACE OF BARRIER

\* GEOMETRIC PATTERNS


#### NOTE:


\* NO PATTERNS SHALL FEATURE ANY LONG UPWARD-SLOPING EDGES OR RIDGES THAT COULD CONTRIBUTE TO WHEEL OR TIRE CLIMB.

SECTIONS

# AESTHETIC TREATMENT CONCRETE BARRIER TYPE 60

NO SCALE

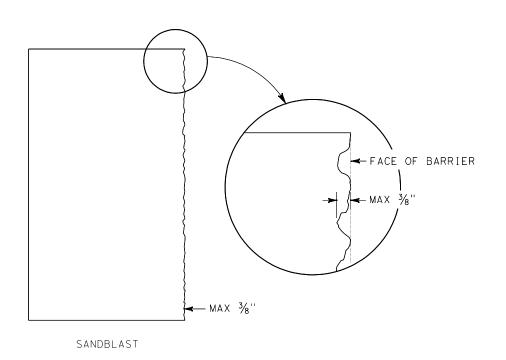

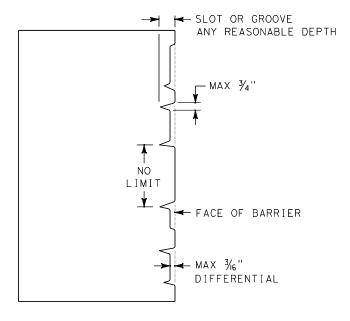

GAPS, SLOTS, GROOVES OR JOINTS

SECTIONS

## AESTHETIC TREATMENT CONCRETE BARRIER TYPE 60

NO SCALE