

# North Buellton CAPM

## Santa Barbara County - Highway 101 - Post Mile R56.09/65

### Description


The North Buellton CAPM is located in Santa Barbara County on Highway 101 from just south of the Santa Rosa Rd Interchange to about 2 miles south of the San Antonio Creek Bridge. It plans to preserve about 29 lane miles of flexible pavement, about 6 lane miles of rigid pavement, and all ramp pavement using CAPM strategies. The project will also upgrade guardrail, replace 4 culverts, 4 curb ramps, census stations, changeable message sign, and sign panels as needed along the route.

### Purpose & Need

The purpose of this project is to preserve and extend the life of the existing pavement, restore drainage in poor condition to maintain culvert functionality, and maintain an efficient transportation information system. The pavement condition is exhibiting deterioration, and if continued will result in increasingly higher maintenance costs. The culverts are experiencing invert damage, shape loss, joint separation, and undermined backfill. The existing guardrail does not meet the Manual for Assessing Safety Hardware (MASH) requirements, the curb ramps do not meet current ADA standards, and the transportation management system elements are reaching the end of their service life and information is becoming less reliable or absent.

### Current Schedule

Approve Project Initiation Doc.	Complete
Approve Project Report and Environ. Doc.	September 2023
100% Design Completion	May 2025
Begin Construction	November 2025
End Construction	Nov/Dec 2026

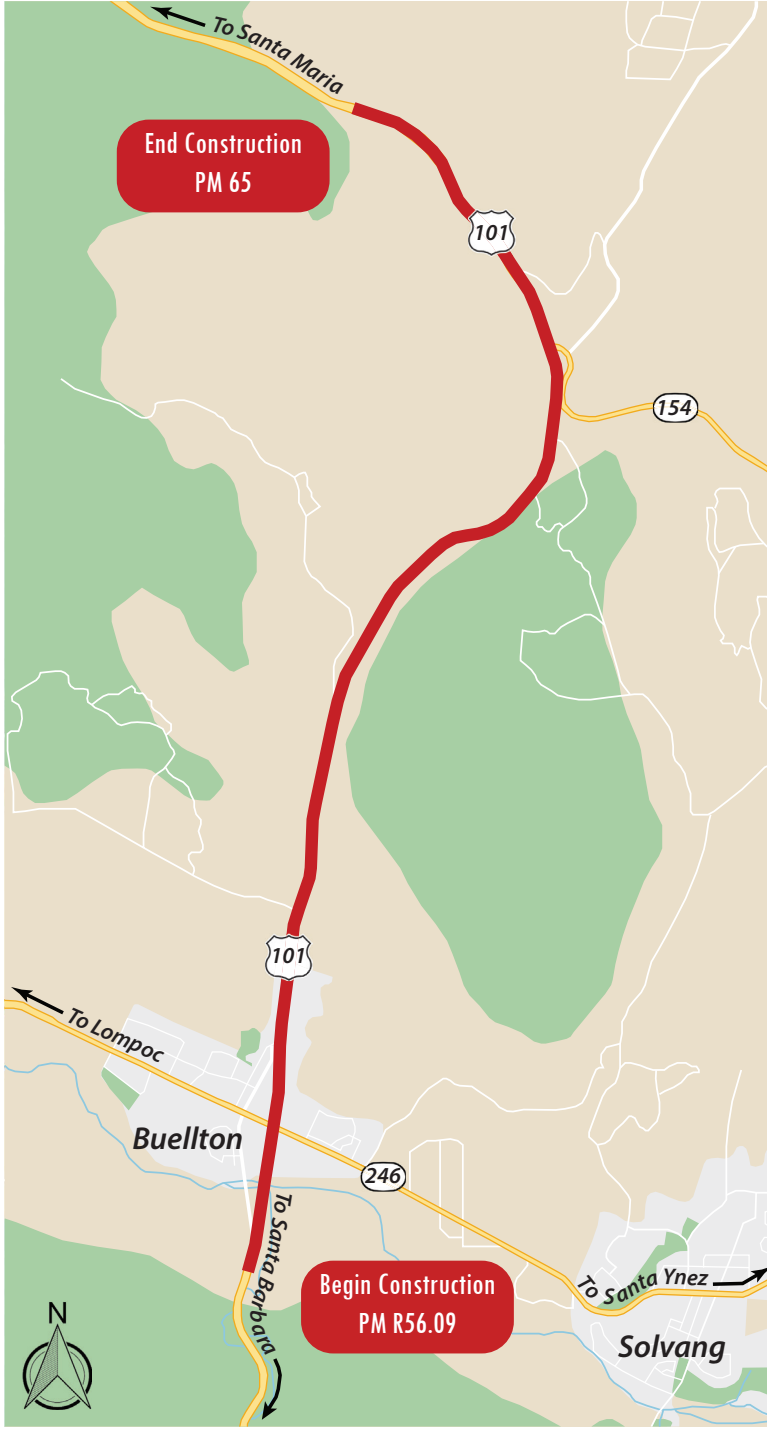

### Funding

Fund Source SHOPP  
Construction Capital Estimate \$28,269,000  
Right of Way Capital Estimate \$117,000

### Contact

Project Manager  
Meg Henry  
meg.henry@dot.ca.gov  
(805) 441-3792

