


# Jack's Peak CAPM

## Monterey County - Highway 1 - Post Mile 74.6/R77.6

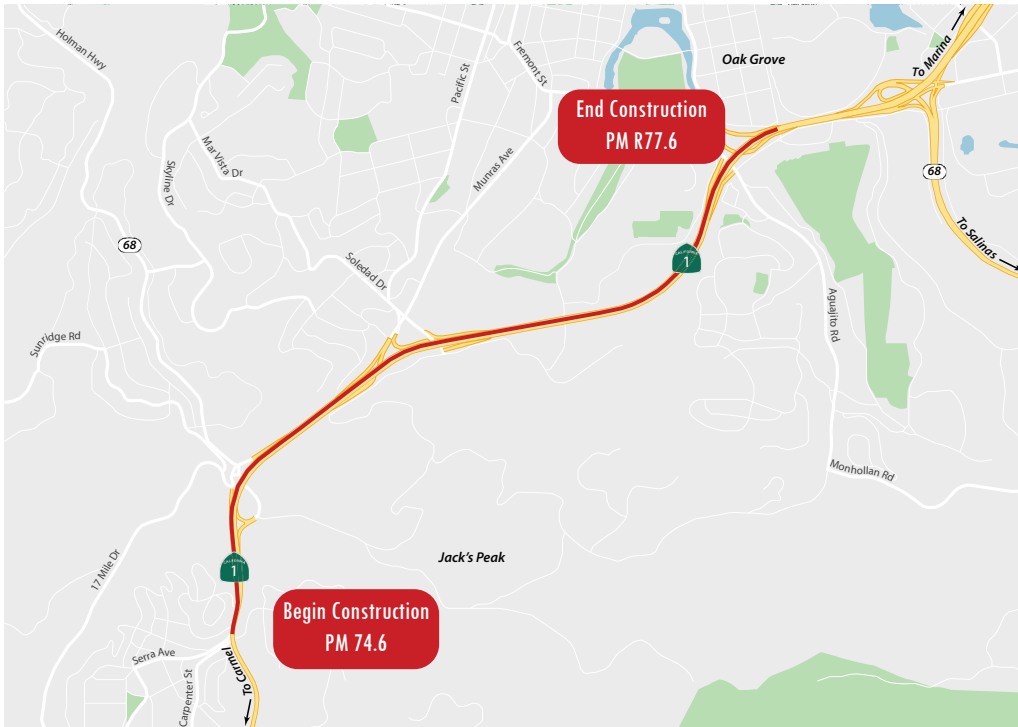

### Current Schedule

- Approve Project Initiation Doc. June 2023
- Circulate Draft Environ. Doc. May 2024
- Approve Project Report and Environ. Doc. April 2025
- 100% Design Completion September 2026
- Begin Construction April 2027
- End Construction March 2028

### Funding

- Fund Source SHOPP
- Construction Capital Estimate \$13,213,000
- Right of Way Capital Estimate \$25,000

### Description

The Jack's Peak Capital Preventative Maintenance Project (CAPM) is located in Monterey County on Highway 1 from the San Luis Ave intersection to the Sloat Ave Undercrossing. The project proposes to preserve just over 11 lane miles of Class 2 pavement, replace an overhead sign structure and roadside sign panels, enhance roadside safety by using beyond-the-gore paving, and upgrade identified guardrail locations and median barriers to meet the Manual for Assessing Safety Hardware (MASH) standards. Complete Streets features will also be involved, including overlaying the Class 1 Bike Path, adding Class II Bike Lanes, and improving striping and pavement markings.

### Purpose & Need

The purpose of this project is to preserve and extend the life of the existing pavement and facilities. The pavement within the project limits is exhibiting deterioration and could require additional maintenance efforts if not addressed. Roadside infrastructure is essential for maintaining traffic control and traffic safety, therefore the overhead sign structure and roadside sign panels will be replaced to enhance roadside safety. The existing guardrail and median barrier do not currently meet MASH standards, and will be upgraded to do so.

### Contact

Project Manager  
Nicholas Heisdorf  
nicholas.heisdorf@dot.ca.gov  
(805) 835-6558

