

Appendix D Example 19 – Individual Falsework Pads – Symmetrical Loading

Refer to *Falsework Manual*, Section 8-2.06A, *Analysis of Symmetrical Pads*. This example demonstrates how to analyze individual symmetrical falsework pads.

Given Information

Timber pads:

Three 6 x 12 Rough Douglas Fir-Larch #2 (G=0.50)

Corbel:

8 x 8 Rough Douglas Fir-Larch #1 (G=0.50)

Post:

8x8 Douglas Fir-Larch #1 (G=0.50)

Allowable soil pressure = 2500 psf

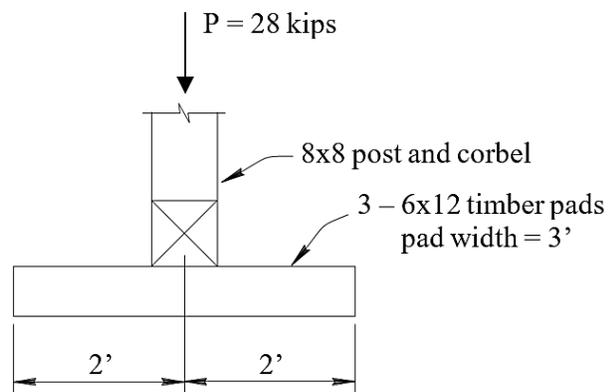


Figure D-19-1. Symmetrical Individual Pad with Single Corbel

Check Pad

1. Calculate allowable bending stress

Reference design value in bending $F_b = 875$ psi (NDS, Supplement Table 4D)

Adjustment factors from NDS, Table 4.3.1:

$C_D = 1.25$	Duration Factor
$C_M = 1.0$	Wet Service Factor NDS, Table 4D (Assume < 19% moisture content)
$C_t = 1.0$	Temperature Factor NDS, Table 2.3.3 (Temp up to 100°F)
$C_L = 1.0$	Beam Stability Factor NDS 4.4.1
$C_F = 1.0$	Size Factor NDS, Table 4D
$C_{fu} = 1.0$	Flat Use Factor NDS, Table 4D
$C_i = 1.0$	Incising Factor NDS 4.3.8

$C_r = 1.0$ Repetitive Member Factor NDS 4.3.9

Adjusted design value $F_b' = F_b (C_D)(C_M)(C_L)(C_t)(C_F)(C_i)(C_{fu})(C_r) = 1094$ psi

2. Calculate effective length

$$L_{SYM} = \frac{1}{12} \left(\frac{8F_b' S}{1000P} + t \right) = \frac{1}{12} \left(\frac{8(1094)(216)}{1000(28)} + 8 \right) = 6.29 \text{ ft}$$

$$S = \frac{bh^2}{6} = \frac{3(12)(6)^2}{6} = 216 \text{ in}^3$$

3. Find the limiting length

Compare adj. effective length and actual length $6.29 > 4.0$; use actual length

4. Calculate soil pressure

$$\text{Soil pressure} = \frac{P}{A} = \frac{28000}{3.0(4.0)} = 2333 \text{ psf}$$

2333 psf < 2500 psf allowable **OK**

5. Calculate horizontal shear stress

Reference design value in shear $F_v = 170$ psi (NDS, Supplement Table 4D)

Adjustment factors from NDS, Table 4.3.1:


$C_D = 1.25$ Duration Factor

$C_M = 1.0$ Wet Service Factor NDS, Table 4D (Assume < 19% moisture content)

$C_t = 1.0$ Temperature Factor NDS, Table 2.3.3 (Temp up to 100°F)

$C_i = 1.0$ Incising Factor NDS, Table 4.3.8

Adjusted design value $F_v' = F_v (C_D)(C_M)(C_t)(C_i) = 213$ psi

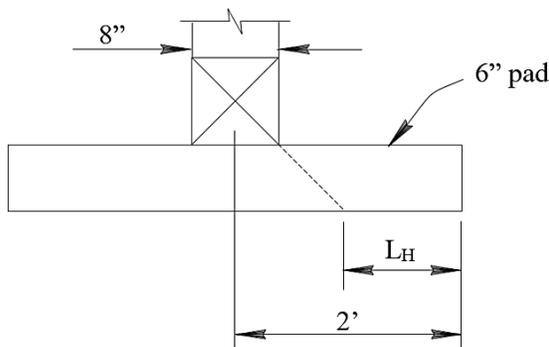

$$L_H = \frac{4.0}{2} - \frac{8/12}{2} - \frac{6}{12} = 1.17 \text{ ft}$$


$$V = (2333)(1.17)(3.0) = 8189 \text{ lbs.}$$

$$f_v = \frac{3V}{2A} = \frac{3(8189)}{2(6)(12)(3)} = 57 \text{ psi}$$

57 psi < 213 psi allowable **OK**

Figure D-19-2. Symmetrical Pad Shear Dimensions

Check corbel

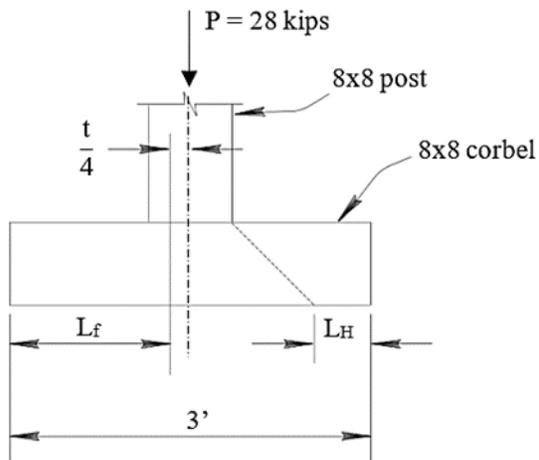

$$W = \frac{28000}{3} = 9333 \text{ plf}$$

$$S = \frac{bh^2}{6} = \frac{8(8)^2}{6} = 85.3 \text{ in}^3$$

$$L_H = \frac{3.0}{2} - \frac{8/12}{2} - \frac{8}{12} = 0.50 \text{ ft}$$

$$L_f = \frac{3.0}{2} - \frac{8/12}{4} = 1.33 \text{ ft}$$

Figure D-19-3. Timber Corbel Flexure and Shear Dimensions

1. Calculate compression perpendicular to grain

Reference design value in shear $F_{c\perp} = 625 \text{ psi}$ (NDS, Supplement Table 4D)

Adjustment factors from NDS, Table 4.3.1:

- $C_M = 1.0$ Wet Service Factor NDS, Table 4D (Assume < 19% moisture content)
- $C_t = 1.0$ Temperature Factor NDS, Table 2.3.3 (Temp up to 100°F)
- $C_i = 1.0$ Incising Factor NDS, Table 4.3.8
- $C_b = 1.0$ Bearing Area Factor NDS 3.10.4

Adjusted design value $F_{c\perp}' = F_{c\perp}(C_M)(C_t)(C_i)(C_b) = 625$ psi

$$f_c = \frac{P}{A} = \frac{28000}{8(8)} = 438 \text{ psi}$$

438 psi < 625 psi allowable **OK**

2. Calculate horizontal shear stress

$$V = 0.5 (9333) = 4667 \text{ lbs}$$

$$f_v = \frac{3V}{2A} = \frac{3(4667)}{2(64)} = 109 \text{ psi}$$

109 psi < 213 psi allowable **OK**

3. Calculate bending stress

$$M = \frac{WL^2}{2} = \frac{(9333)(1.33)^2}{2} = 8255 \text{ ft-lbs}$$

$$f_b = \frac{M}{S} = \frac{8255(12)}{85.3} = 1161 \text{ psi}$$

Reference design value in bending $F_b = 1200$ psi (NDS, Supplement Table 4D)

Adjusted design value $F_b' = F_b (C_D)(C_M)(C_L)(C_t)(C_F)(C_i)(C_{fu})(C_r) = 1500$ psi
(see "Pad Check" step 1 for adjustment factors)

1161 psi < $F_b = 1500$ psi allowable **OK**