

	<u>/3</u> (102)—	
5 (108)		
	COLUMN TO THE POTATION	
	3 103	

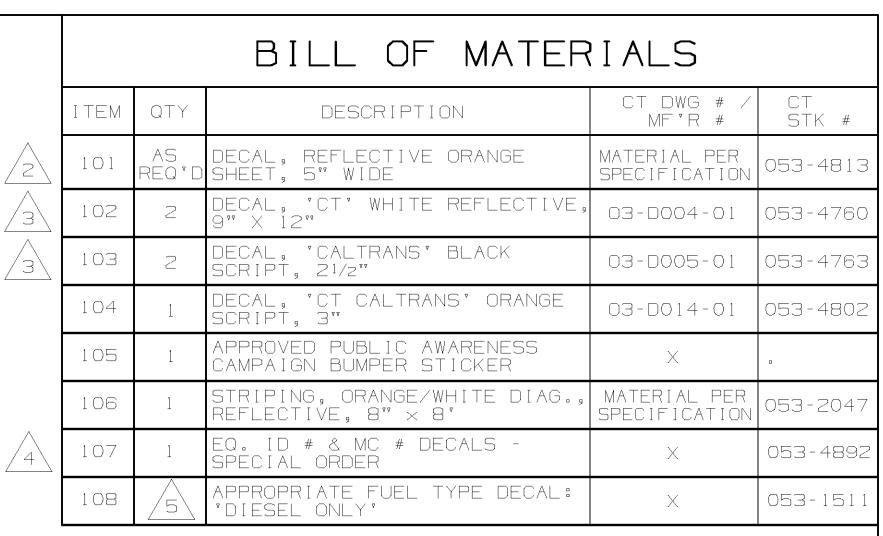

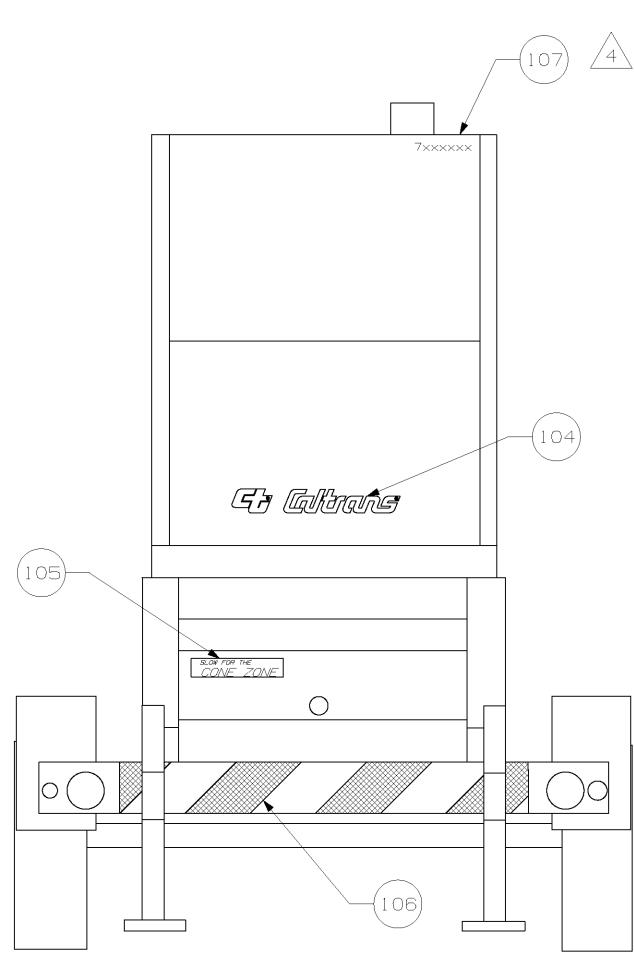

NOTES:

1. ALL DELINEATION WILL BE IN COMPLIANCE WITH CALTRANS EQUIPMENT QUALITY STANDARDS. GO TO www.dot.ca.gov/hq/eqsc TO VIEW EQUIPMENT QUALITY STANDARDS.

STRIPING APPLICATION: ALL STICKERS, LABELS AND STRIPING SHALL BE LEVEL, STRAIGHT, BUBBLE-FREE AND DEBRIS-FREE. NO SPLICING OF TAPE OR STRIPING SHALL BE ACCEPTABLE. ALL EDGES ON STRIPING SHALL BE TRIMMED 1/8-3/8 INCH FROM THE EDGES OF DOORS, PANELS, FENDERS, LIGHTS, EMBLEMS, ETC. ORANGE REFLECTIVE SHEETS (ITEM 101) AND STRIPING (ITEM 107) SHALL BE TRIMMED TO MATCH BODY CONTOURS AND CREASES WHEN IT WILL NOT LAY HORIZONTAL. ANY REFLECTIVE TYPE OF STRIPE OR STICKER SHALL NOT BE PULLED FROM THE VEHICLE AND REAPPLIED DURING APPLICATION, SINCE THE REFLECTIVE MATERIAL WILL BE COMPROMISED.

 $\sqrt{3}$ item 101 to be located such that item 102 "ct" logo is centered on stripe item 101. Item 103 to be located below the "ct" logo

SEVEN-DIGIT EQUIPMENT IDENTIFICATION NUMBER (EQ. ID #) ALWAYS STARTS WITH A "7" AND SHALL BE AFFIXED TO THE REAR OF THE VEHICLE IN THE UPPER RIGHT CORNER.

QUANTITY OF MC# AND FUEL TYPE DECALS MAY VARY BY CHASSIS SUPPLIER.

COPYRIGHT 2015 CALIFORNIA DEPARTMENT OF TRANSPORTATION. ALL RIGHTS RESERVED

THIS DOCUMENT CONTAINS CONFIDENTIAL AND PROPRIETARY INFORMATION THAT CANNOT BE REPRODUCED OR DIVULGED, IN WHOLE OR IN PART, WITHOUT WRITTEN AUTHORIZATION FROM CALTRANS DIVISION OF EQUIPMENT, OFFICE OF ENGINEERING AND PRODUCTION

REV	DESCRIPTION			BY		
NEXT ASSEMBLY DIVISION OF EQUIPMENT DIVISION OF EQUIPMENT						
TOLERANCE-UNLESS OTHERWISE SPECIFIED DECIMAL ± XX	TRAILER MOUNTED GENERATOR, 175 kW DELINEATION					
FRACTIONAL ± XX ANGULAR ± XX DRILLED HOLES + XX	scale XX DRAWN J Payne	DATE 13 Jan 16 DESIGNED XX	I - 35	5720-DE		
REAMED HOLES ± xx	CHECKED	APPROVED	SHEET_	1_OF_1_SHEETS		