



CALTRANS DIVISION OF RESEARCH,
INNOVATION AND SYSTEM INFORMATION

TRANSFORMING IDEAS INTO SOLUTIONS

Research



Notes



Advanced
Research

MAY 2024

Project Title:
Connected and Automated
Vehicles Cross-Cutting Research

Task Number: 3900

Start Date: May 15, 2022

Completion Date: May 14, 2024

Task Manager:
Steven Turner
Transportation Engineer Electrical
steven.turner@dot.ca.gov

A Roadmap For Flow Smoothing Via Connected And Automated Vehicles(CAV) In California

Conduct simulations on how vehicle autonomy (level 2 and above) can reduce of stop and go traffic and improve energy efficiency.

WHAT IS THE NEED?

As companies continue to integrate automation features into their releases, the state of multiple-vehicle coordination today is not at the forefront of the agenda of the industry. This is mostly because the innovation ecosystem of traffic automation is only at the infancy of multiple vehicle coordination for traffic management.

The idea of leveraging the advances of automation of single vehicles for traffic management is precisely the motivation behind this research.

Today, a large variety of mainstream vehicles (e.g., Toyota RAV-4 for example) come with some standard degree of automation (e.g., automatic cruise control, lane departure steering assist, etc.), while the technology available in state-of-the-art high-end vehicles (e.g., Tesla) enables the coordination of multiple level-2 enabled vehicles to smooth traffic. The existing research team is part of a larger project aimed at studying wave-smoothing connected autonomous vehicles connected automated vehicles into live congested traffic in order to reduce the system-level energy consumption.

WHAT ARE WE DOING?

In this first task, the contractor will develop a series of robustness tests (ranging from easy to difficult) in simulation so that the contractor can confidently narrow down our list of controllers. The work will involve developing a simulation environment (microsimulator) which exhibits traffic waves in a range of settings.



DRISI provides solutions and
knowledge that improves
California's transportation system

For this the contractor will continue to leverage the I-210 simulation testbed built by the Connected Corridors team and expand the results to the I-680 in Danville. Vehicle controllers will be subjected to these varied scenarios and assessed on their abilities to smooth waves, reduce system-level energy consumption, and behave in a socially acceptable manner.

In this second task, the contractor will design a workflow to facilitate easy implementation of controllers onto the test vehicles. The control vehicles will be two Toyota Rav-4's equipped with comma.ai interface packages that the contractor has already purchased. The workflow will include a code translation step (from python to Simulink) and a verification unit test to confirm the expected actuation outputs from the vehicle.

The remaining vehicles in the contractor's fleet will be deployed in a distributed fashion onto the testbed as data collectors. While they will be human-driven vehicles, they will also need to be equipped with interface packages (e.g. comma.ai or similar) so that the collected data can be post-processed and analyzed. This third task will ensure that the remaining vehicles are sufficiently equipped and that the contractor has all the hardware and software infrastructure to access the data.

WHAT IS OUR GOAL?

The goal of this specific project is to advance our understanding of how controller policies transfer from simulation environments to real-world implementations in California.

WHAT IS THE BENEFIT?

The preliminary work previously has demonstrated that such a reduction is already possible, with a test run in a preliminary form in Arizona, leading to the 40% reduction mentioned above (see Figure 3, left). Current numerical simulations, leveraging the I-210 Connected Corridors model already

indicate that 10% reduction in energy consumption is possible with a 5% penetration rate of level-2-enabled connected automated vehicles on that freeway.

As a part of that overall thrust, the goal of this project specifically is to advance Caltrans understanding of policy transfer from simulation to reality and to demonstrate it in California. The I-210 testbed could be a specific deployment site. Caltrans is also envisioning some Bay Area Centric test sites, such as I-680, I-880 or I-80. In order to bridge our ongoing deep-reinforcement learning research to real-world implementation, we seek to perform robustness testing in the form of controlled small-scale tests on California roadways in 2022. These small-scale tests will simultaneously serve as a seed for future CAV deployments and traffic research in the State of California.

WHAT IS THE PROGRESS TO DATE?

Over the course of one week (In November 2022) a fleet of 100 smart vehicles driving in morning rush hour traffic on Interstate 24 in South Nashville, TN, were used to test findings from the simulations. The vehicles equipped with adaptive cruise control were used in an effort to help mitigate human-caused phantom traffic jams. Researchers also utilized 300 ultra-HD cameras along the I-24 corridor to collect additional data points. Using vehicle-to-vehicle communication, AI algorithms adjust vehicle speeds based on information far ahead of the vehicle. Initial tests show a reduction in phantom traffic jams. Researchers are currently reviewing the data collected and revising the AI algorithm.

The California mini tests took place during the latter part of 2023. The data from the mini tests have been extracted and are being tested for various methods for analyzing the flow-smoothing performance. With the controller engaged, the drive is noticeably smoother, and a quantitative reduction in fuel consumption has been observed.

The project is scheduled to end in May of 2024 and a comprehensive report on the research methodology and results will be presented later this year.

IMAGES

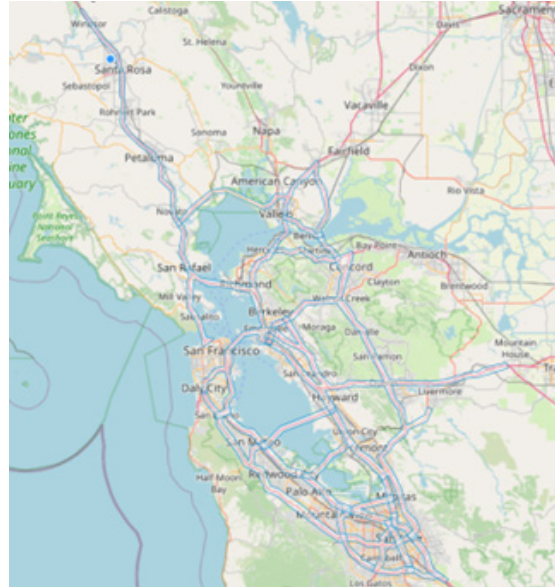


Figure 1. A map of District 4 highways where our vehicle data is automatically collected.

The contents of this document reflect the views of the authors, who are responsible for the facts and accuracy of the data presented herein. The contents do not necessarily reflect the official views or policies of the California Department of Transportation, the State of California, or the Federal Highway Administration. This document does not constitute a standard, specification, or regulation. No part of this publication should be construed as an endorsement for a commercial product, manufacturer, contractor, or consultant. Any trade names or photos of commercial products appearing in this document are for clarity only.