

Transportation  
Safety and  
Mobility

FEBRUARY 2022

Project Title:  
Complete Cities: Bicycle Network  
Connectivity Evaluation  
Methodology

Task Number: 3935

Start Date: January 1, 2022

Completion Date: December 31,  
2023

Task Manager:  
Jerry Kwong  
Transportation Engineer  
jerry.kwong@dot.ca.gov

## Complete Cities: Bicycle Network Connectivity Evaluation Methodology

Develop a simple bicycle network evaluation methodology for practitioners and researchers.

### WHAT IS THE NEED?

While the Complete Streets concept has quickly grown from an initiative to a widely accepted design principle, it often is not always practical. Not every street can, nor needs to be, made complete for pedestrians and bicycles. Instead, it is equally important, if not more, that cities and towns ensure there is a complete network for bicycles and pedestrians where it is most needed, rather than various disconnected and isolated bicycle and pedestrian streets. For example, expending considerable resources reconstructing road geometry along a major thoroughfare to accommodate all modes will yield little value if the greater bicycle network fails to adequately connect to this new link.

Once weak or critical links in a bicycle network are identified, there exists a plethora of possible improvement strategies. Such as innovative bicycle-specific signal phasing, or even the pedestrianization of streets altogether to prohibit automobiles. However, practitioners and decisions makers are often reluctant to implement bicycle and pedestrian improvements without quantifiable benefits to the network.

Many municipalities and regional agencies lack simple and reliable tools to objectively evaluate their street networks. Those that do, often rely on bespoke tools that makes competing for funding difficult if other locations rely on a different set of incomparable values. Existing methodologies are often purely academic, complex, subjective, or locally specific. However, several methodologies could be combined or simplified, such as level of traffic stress (LTS), bicyclist tolerance typologies, and classical graph theory measures of network connectivity.



DRISI provides solutions and  
knowledge that improves  
California's transportation system

## WHAT ARE WE DOING?

This research aims to provide the quantified network connectivity measure for network-scale level of service (LOS) evaluation. To achieve the goal, research will be conducted in the following steps:

1. Literature review – thoroughly review research and practice literature for two key components (see Figures 1 and 2):
  - a. Statistical network connectivity measure (e.g., from graph theory)
  - b. Infrastructure scoring/weighting algorithm
2. Model development: combine or develop a unified methodology for evaluating a network.
3. Testing and evaluation: test the proposed methodology using available data.
4. Reporting: document the methodology, findings, and recommendations.

## WHAT IS OUR GOAL?

The goal is to develop a simple bicycle network evaluation methodology for practitioners and researchers alike, and that is not only applicable across different regions, but normalized to be comparable between regions. The proposed methodology will meet the following criteria:

- Easy to use by non-technical practitioners,
- Allows a minimum infrastructure for user representation to be defined,
- Minimal data and computational requirements,
- Universally normalized, providing a value that can be compared across different cities, and
- Accounts for both coverage and connectivity.

## WHAT IS THE BENEFIT?

The benefit of the proposed methodology research is to provide a fundamental key performance indicator for bicycle network connectivity. Not only can it yield an improved bicycle network, but also potential cost saving benefits by avoiding unnecessary infrastructure expenditures.

## WHAT IS THE PROGRESS TO DATE?

The project has been fully executed by DPAC. The kickoff meeting is scheduled on February 23rd, 2022.

## IMAGES

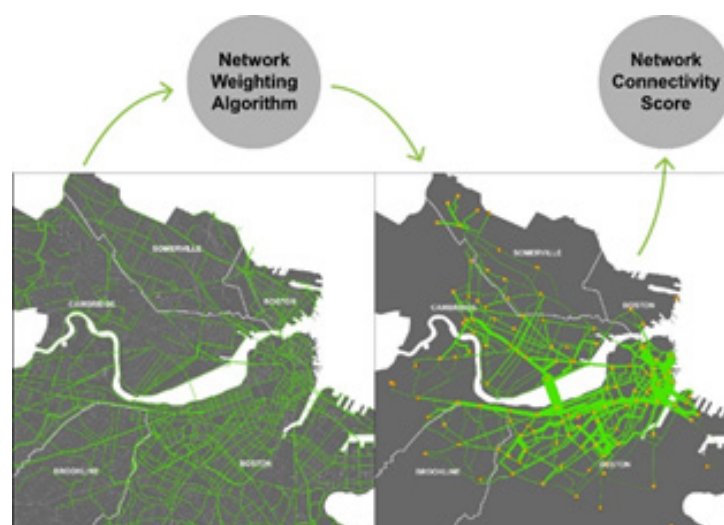


Figure 1: Conceptual framework

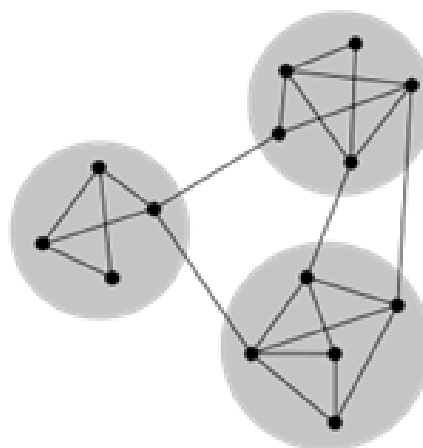


Figure 2: sub-graph connectivity