



Caltrans Division of Research,
Innovation and System Information

Research



Results

Seismic

FEBRUARY 2015

Project Title:

Seismic Responses of Mechanically Stabilized Earth Walls Using Accelerated Alternative Backfill Materials with Recycled Tire Shreds and Lightweight Aggregates

Task Number: 2416

Start Date: May 16, 2012

Completion Date: July 16, 2013

Task Manager:

Peter Lee
Research Contract Manager
plee@dot.ca.gov

Seismically Testing Backfilled Mechanically Stabilized Earth Walls

MSE retaining walls with recycled tire-derived backfill can sustain strong seismic shaking

WHAT IS THE NEED?

To repair and replace our aging highway and bridge infrastructure with the least impact to the motoring public, accelerated construction techniques are gaining popularity. Mechanically stabilized earth (MSE) walls is one technique that is widely used in retaining embankments in highway systems, because in certain situations they are easier to construct and more economical than conventional reinforced concrete retaining walls. To accelerate construction, alternative materials, such as tire-derived aggregates and lightweight aggregates, are increasingly used as backfill for the retaining walls. Lightweight aggregates consist of clay or shale expanded in a kiln. Tire-derived aggregates are pieces of shredded waste tires, which offer the added benefit of reusing materials that would otherwise be disposed of in landfills or stockpiled. Generally, MSE walls have performed well during past major earthquakes. However, they have not yet been fully tested with the alternative aggregate backfill under seismic conditions.

WHAT WAS OUR GOAL?

The goal was to investigate the seismic performances of mechanically stabilized earth walls with tire-derived or lightweight aggregates as backfill and provide design and construction recommendations for seismic regions.

WHAT DID WE DO?

Caltrans, in partnership with the California State University, Fresno Department of Civil and Geomatics Engineering, investigated the seismic performance of MSE walls with tire-derived aggregates and lightweight aggregates as backfill.



Caltrans provides a safe, sustainable, integrated and efficient transportation system to enhance California's economy and livability.

ADA Notice: For individuals with sensory disabilities, this document is available in alternate formats. For information call (916) 654-8899 or 711 TTY or write Caltrans Division of Research, Innovation and System Information, P.O. Box 942873, Sacramento, CA 94273-0001.

The researchers tested a 1.5 meters x 1.5 meters x 1.3 meters deep MSE model wall on a one-dimensional shake table. They simulated a full-scale earthquake, comparable to Loma Prieta or Northridge, and sinusoidal sweep-frequency motions (0.2 to 6.0 Hz). A flexible boundary condition was incorporated in the tests, and seismic design was used to construct the internal stability of the MSE wall. The researchers also developed a model using Plaxis geotechnical software to replicate the experimental studies. The numerical model verified the validity of using the spring-supported boundary condition in the shake table testing. The comparison between the numerical and the experimental results warrants further studies to improve the material characteristics and modeling techniques.

WHAT WAS THE OUTCOME?

When properly designed, MSE walls with tire-derived backfill can sustain strong seismic shaking without excessive deformation and lateral spreading. Based on the results, tire-derived aggregates perform better in seismic regions than lightweight aggregates. The Federal Highway Administration's seismic design methodology for MSE walls with traditional backfill might be suitable for these alternative backfills.

WHAT IS THE BENEFIT?

Accelerated construction techniques have proven benefits, including minimizing traffic disruption, improved work zone safety, and reduced on-site environmental impacts. MSE retaining walls using recycled tire-derived aggregates as backfill provide an accelerated solution that is environmentally friendly and can reduce costs and save time.

LEARN MORE

To view the complete report:
www.dot.ca.gov/research/researchreports/reports/2013/final_report_65a0449.pdf

IMAGES



Figure 1: Shake table test of an MSE wall

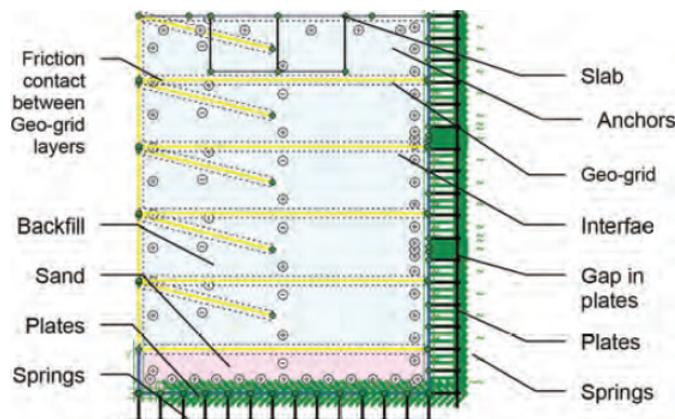


Figure 2: Geometry of the MSE model

The contents of this document reflect the views of the authors, who are responsible for the facts and accuracy of the data presented herein. The contents do not necessarily reflect the official views or policies of the California Department of Transportation, the State of California, or the Federal Highway Administration. This document does not constitute a standard, specification, or regulation. No part of this publication should be construed as an endorsement for a commercial product, manufacturer, contractor, or consultant. Any trade names or photos of commercial products appearing in this document are for clarity only.