


STATE OF CALIFORNIA — DEPARTMENT OF TRANSPORTATION

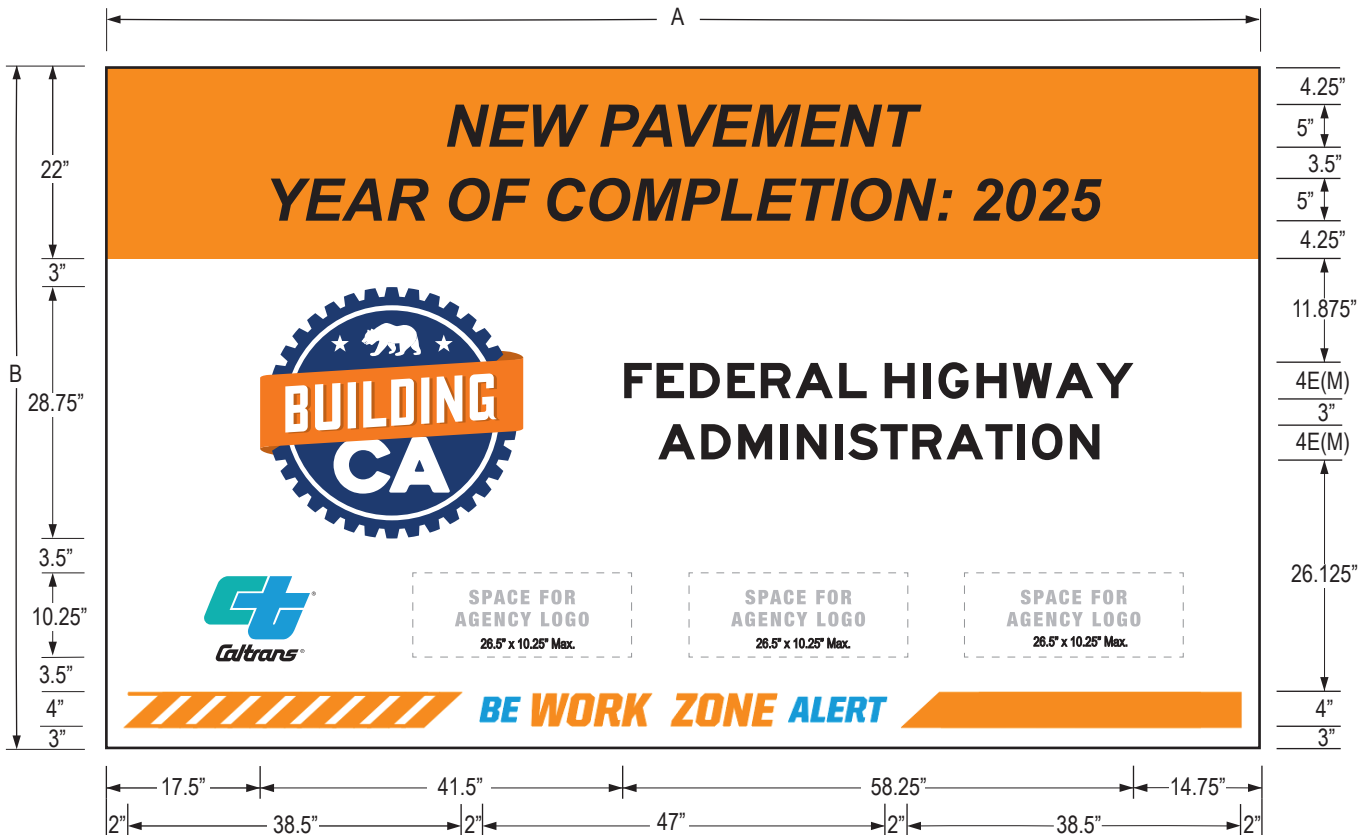

NOTES:

C50C(CA)

1. Provided dimensions are for the 132"x78" sign panel.
 For the 96"x60" sign panel, multiply each horizontal dimension of the 132"x78" sign panel by approximately 0.728 and each vertical dimension by approximately 0.769. Adjust spacing as needed.
 For the 48"x30" sign panel, multiply each horizontal dimension of the 132"x78" sign panel by approximately 0.364 and each vertical dimension by approximately 0.385. Adjust spacing as needed.
2. See Special Provisions for project description and year of completion. Specify when ordering.
3. CT logo and/or Local Agency logo(s) placement and spacing can be adjusted as needed.

ENGLISH UNITS (inches)

A	B
132	78
96	60
48	30

PRIMARY PROJECT DESCRIPTION (LINE 1)

NEW PAVEMENT
NEW CARPOOL LANE
BRIDGE MAINTENANCE
BRIDGE RESTORATION
NEW BIKING/WALKING PATHS
BROADBAND INSTALLATION
IMPROVED DRAINAGE SYSTEM

ALTERNATE PROJECT DESCRIPTION (LINE 1)

HIGHWAY CONSTRUCTION
HIGHWAY REPAIR
HIGHWAY IMPROVEMENT
BRIDGE CONSTRUCTION
ROADSIDE WORK

COLORS:

LEGEND - BLACK (ARIAL BOLD ITALIC IN HEADER)

BACKGROUND - WHITE AND FLUORESCENT ORANGE

SEE VECTOR GRAPHIC FILE FOR "BUILDING CA" LOGO

CT LOGO: PANTONE #299 BLUE AND PANTONE #326 TURQUOISE

BE WORK ZONE ALERT RIBBON: PANTONE #299 BLUE AND ORANGE

ALL COLORS TO BE RETROREFLECTIVE, EXCEPT FOR BLACK