Figure 4N-1. Sequence for an Emergency-Vehicle Hybrid Beacon

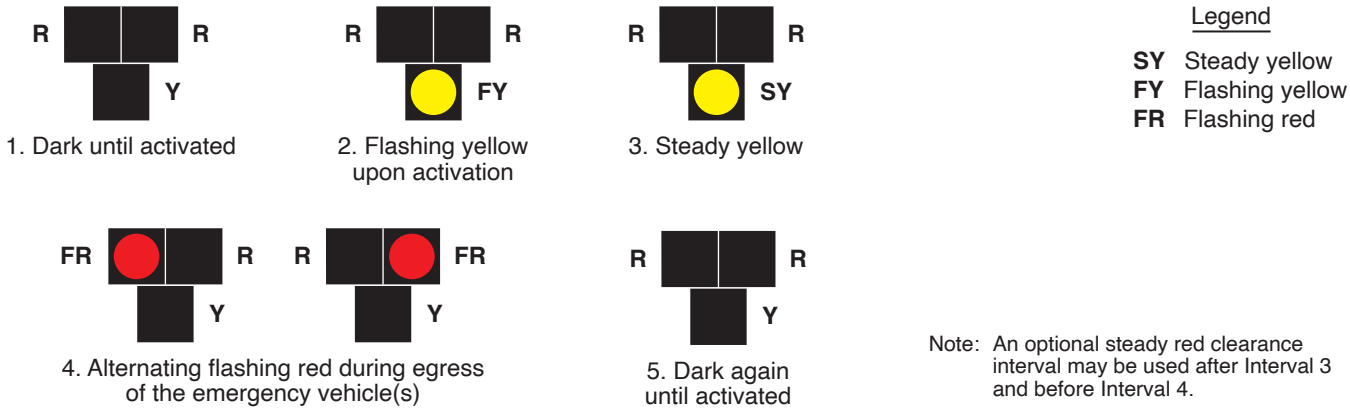

Note: An optional steady red clearance interval may be used after Interval 3 and before Interval 4.