


Figure 4U-101 (CA). Typical Layout for In-Roadway Warning Lights (IRWLs)

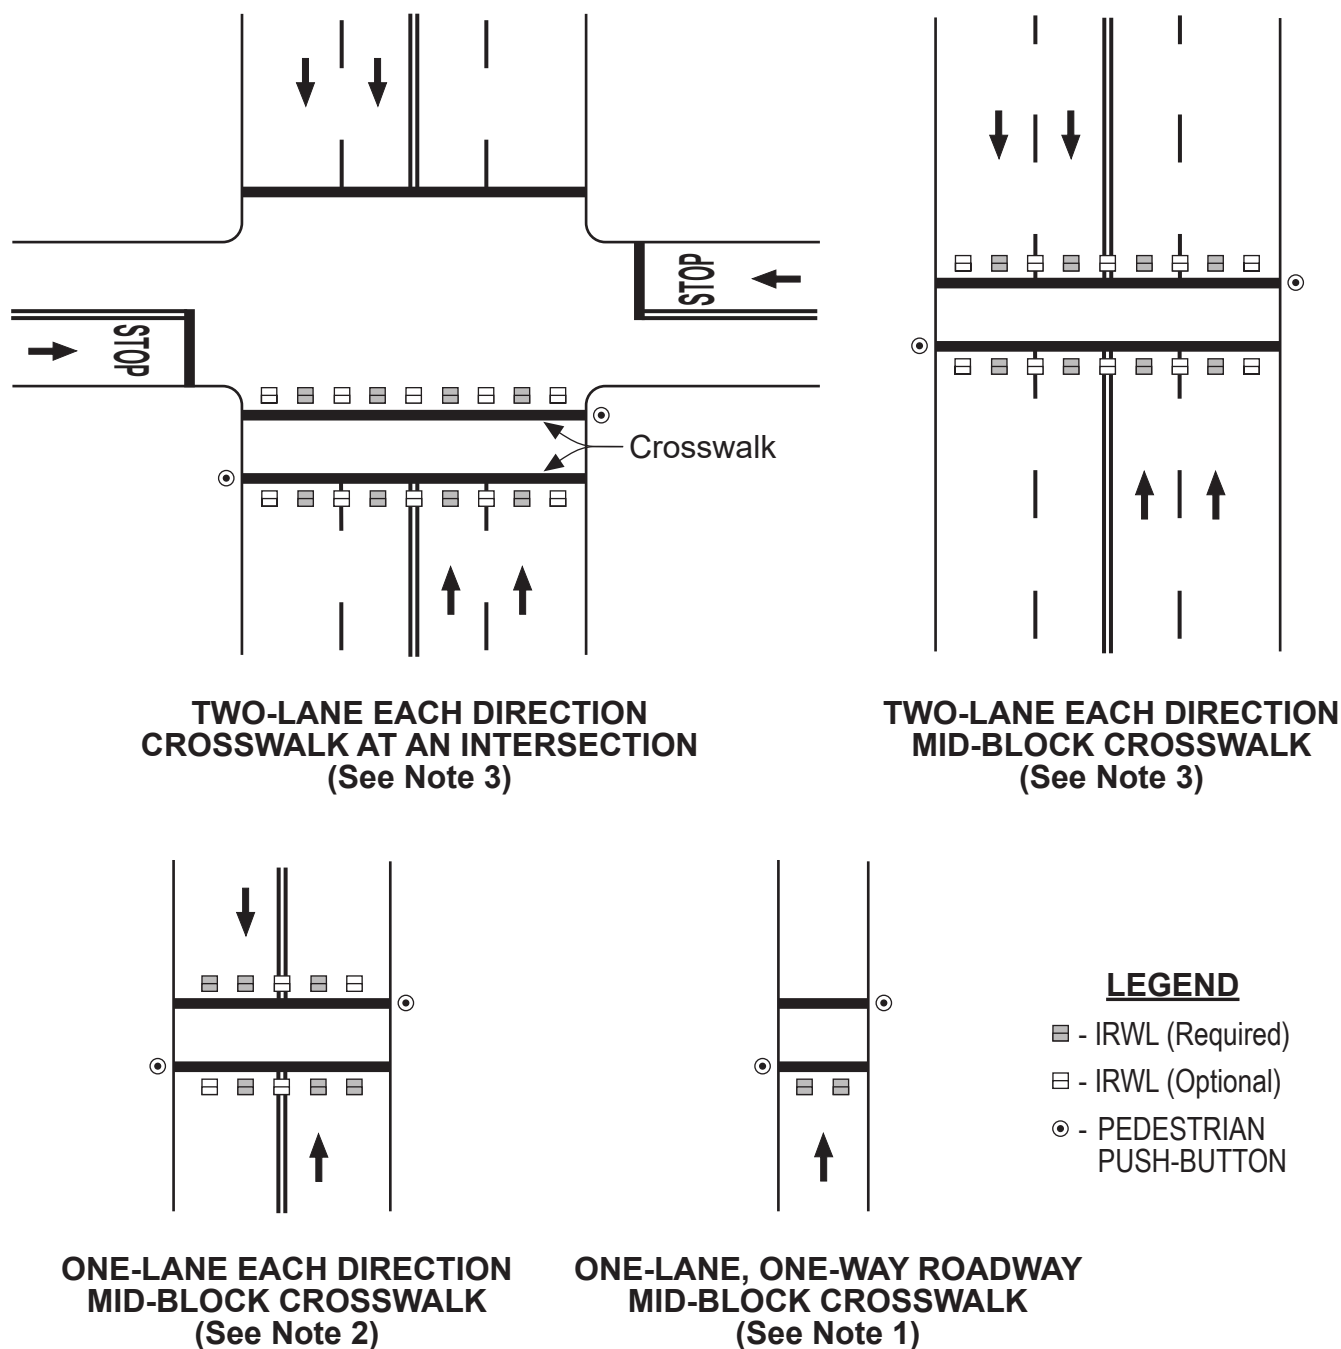

NOTES:

1. One-Lane, One-Way Roadways, a minimum of two IRWLs shall be installed on the approach side of the crosswalk.
2. One-Lane each direction, a minimum of three IRWLs shall be installed along both sides of the crosswalk.
3. Two-Lanes each direction, a minimum of one IRWLs per lane, shall be installed along both sides of the crosswalk.
4. IRWLs should be located off the tire tracks.