

Meeting Date: February 6, 2025 Item Number: 25-01	From: Johnny Bhullar, Caltrans HQ Safety Programs
Sponsored By: Amjad Obeid, Caltrans	Presented By: Johnny Bhullar, Caltrans HQ Safety Programs
Description: Request for review and recommendation to finalize CA MUTCD 2026 Part 1 titled "General" draft document as part of CA MUTCD 2026 version that is being prepared to adopt Federal Highway Administration's National MUTCD 2023 (11 th Edition) before the January 18, 2026, deadline.	

Recommendation:

Motion by committee, recommending Caltrans to finalize and prepare the CA MUTCD 2026 Part 1 titled "General" draft document and incorporate it into CA MUTCD 2026 version that is being prepared to adopt Federal Highway Administration's National MUTCD 2023 (11th Edition) before the January 18, 2026, deadline.

Agency Making Request/Sponsor:

Johnny Bhullar (Caltrans) / Amjad Obeid, CTCDC Member.

Background:

The National MUTCD 2023 (11th Edition) is published by Federal Highway Administration's (FHWA) under 23 Code of Federal Regulations (CFR), Part 655, Subpart F. On December 19, 2023, a Final Rule adopting the National MUTCD 2023 was published in the Federal Register with an effective date of January 18, 2024. States must adopt the National MUTCD as their legal State standard for traffic control devices within two years from the effective date (January 18, 2026, deadline).

Code of Federal Regulation for "Traffic Control Devices on Federal-Aid and Other Streets and Highways" which includes the MUTCD, Part 655, Subpart F is available at: <https://www.ecfr.gov/current/title-23/chapter-I/subchapter-G/part-655/subpart-F>

The Federal Register notice on "National Standards for Traffic Control Devices; the Manual on Uniform Traffic Control Devices for Streets and Highways; Revision" can be viewed at <https://www.federalregister.gov/d/2023-27178>

Caltrans began the process to review National MUTCD 2023 (11th Edition) for adoption in California by soliciting CA MUTCD practitioners statewide to form Subject Matter Expert (SME) Workgroups based on the individual parts and topics included in the MUTCD. These SME Workgroups were led by the individual topic owners, who have knowledge, expertise, and statewide responsibility on these specific topics of the CA MUTCD.

Initial draft documents are being prepared by Caltrans to revise current CA MUTCD 2014 Revision 8 and develop CA MUTCD 2026 version that will be in substantial conformance with FHWA's National MUTCD 2023 (11th Edition). These initial draft documents are developed pursuant to SME Workgroup members review of their respective CA MUTCD topics in their weekly/bi-weekly meetings and discussions, as well as comments provided by SME Workgroup members per individual reviews and were added directly to the review documents by the members.

This initial review conducted by CA MUTCD topic owners and SME Workgroup members in all SME Workgroups consisted of:

1. Comparing the new National MUTCD 2023 (11th Edition) revised text contents with the current CA MUTCD 2014 Revision 8 text contents (which are based on National MUTCD 2009 (10th Edition)), with the primary focus being on changes to Standard and Guidance statements. In order to meet the established 2-year timeline schedule, these text reviews included only changes to some Option statements, not all changes to the Option statements. The purpose of reviewing changes to text contents was to assess potential conflicts with state law, current policy and/or current practice and potential impacts of adopting these changes for California agencies.
2. Comparing the new National MUTCD 2023 (11th Edition) figures and tables with the respective and relevant current CA MUTCD 2014 Revision 8 figures and tables (which are based on National MUTCD 2009 (10th Edition)). The purpose of comparing the figures and tables was to identify newly added figures and tables, changes to current figures and tables, and deleted figures and tables, and asses any potential impacts of adopting these changes for California agencies.
3. Review of the current CA MUTCD 2014 Revision 8 text contents, with primary focus on California specific text additions (**shown in blue color text and blue margin lines**) and California specific text revisions of the National MUTCD 2009 (10th Edition) text, which are **shown as black strikethrough text and blue margin line** in current CA MUTCD 2014 Revision 8. The purpose of this review was to identify duplicate, similar or conflicting text and eliminate redundancies. Also assessed the need to retain any of these California specific **text additions** or **text revisions** of CA MUTCD 2014 Revision 8 by including them in the CA MUTCD 2026 version. If retaining, ensure the purpose served, to ensure the contents are in substantial conformance with the changes to the National MUTCD 2023 and continued compliance with the provisions of the National MUTCD. This additional review was performed to improve consistency and clarity and help practitioners understand the use and applicability of the manual, while promoting uniformity in its' application.

Pursuant to these meeting reviews and discussions, SME Workgroup members provided comments and recommendations to Caltrans, which were used by Caltrans to finalize these initial draft documents.

CA MUTCD 2026 Part 1 titled "General", initial draft documents included in this request were developed and shared with the traffic control device practitioners and the public in California beginning August 19, 2024. These documents were made available for review and open to the public to provide comments by posting them on the new California's National MUTCD 2023 review and adoption efforts webpage. The public review period on CA MUTCD 2026 Part 1 initial draft documents ended with the closing of comments on November 25, 2024.

The new webpage with California's National MUTCD 2023 review and adoption efforts, including CA MUTCD 2026 Part 1 initial draft documents is available at <https://dot.ca.gov/programs/safety-programs/camutcd/nmutcd>

The new webpage on California's National MUTCD 2023 review and adoption efforts provides details and information on the National MUTCD 2023, FHWA's substantial conformance requirements, deadline for compliance, California's review and adoption process, timeline and schedules, workgroup member reviews, public review opportunities, CTCDC engagements, and CA MUTCD 2026 draft documents.

Compare documents with markups are also made available to share the changes and for ease in reviewing and comparison. The webpage also includes a feature within the website for submitting comments directly from within the website, while also providing downloadable forms which can be submitted electronically or through the regular mail.

All public comments received on CA MUTCD 2026 Part 1 initial draft documents were discussed with the Part 1 SME Workgroup members for resolution and response. The outcome of the public comment dispositions was used to revise the CA MUTCD 2026 Part 1 initial draft documents to prepare this Part 1 final draft.

This CA MUTCD 2026 Part 1 final draft is prepared as an agenda item for the upcoming California Traffic Control Devices Committee (CTCDC) meeting and being made open to public for formal review and comment, to consult with local agencies and conduct public hearings using CTCDC established process and in compliance with California Vehicle Code (CVC) 21400 provisions.

This CA MUTCD 2026 Part 1 final draft combines the National MUTCD 2023 and current California MUTCD 2014 Revision 8 (effective January 11, 2024) documents. Though every effort has been made by Caltrans to ensure accuracy of this document, the inherent variances between National MUTCD and California MUTCD, along with moving of contents and reorganization undertaken by FHWA in the National MUTCD 2023, there may be unintentional errors or omissions in this document, or some contents may have been overlooked.

The official versions of the National MUTCD 2023 and California MUTCD 2014 Revision 8 are available on the following websites:

- National MUTCD 2023 - <https://mutcd.fhwa.dot.gov/>
- California MUTCD 2014 Revision 8 - <https://dot.ca.gov/programs/safety-programs/camutcd>

All CA MUTCD 2026 Part 1 final draft documents, which include all text, figure, and table contents, are being provided in this agenda item as attachments. Refer to Attachments A thru H.

All compare documents for changes in National MUTCD 2023 and to CA MUTCD 2014 Revision 8 Introduction and Part 1, which include all text, figure and table contents, are shown with markups to share the changes and for ease in reviewing and comparison. These compare documents for Introduction and Part 1, due to their large sizes, are not included in this agenda item, they are available, if needed as a reference, on the webpage: <https://dot.ca.gov/programs/safety-programs/camutcd/nmutcd>

CA MUTCD 2026 draft version uses the current California MUTCD format, which is similar to the National MUTCD format. It incorporates National MUTCD in its entirety and explicitly shows which portions thereof are applicable or not applicable in California.

All Text changes reflected in CA MUTCD 2026 draft version, when compared to current CA MUTCD 2014 Revision 8 and National MUTCD 2023, are provided as follows:

- **Unedited black text** - The unedited National MUTCD text is shown in "Times New Roman" font and black color.
- ~~**Strikethrough black text**~~ - Text portions of the National MUTCD content that are not applicable in California are shown with a strikethrough of the black text and [a blue margin line on the right side](#).
- **Blue text** - The California text additions, including new paragraphs, and enhancements are incorporated into the combined document at appropriate locations and shown in "Arial Narrow" font and [blue color with a blue margin line on the right side](#).
- **California topics with no corresponding National MUTCD section** – Sections are given a number that begins with number 101 and increases in sequence, followed with a "(CA)" to indicate that this is a California created section.

All Figure and Table changes reflected in CA MUTCD 2026 draft version, when compared to current CA MUTCD 2014 Revision 8 and National MUTCD 2023, are provided as follows:

- **Blue text, "X" and/or blue rectangle**  and **Blue highlighted text** - Revisions to National MUTCD 2009 Figures and Tables in current CA MUTCD 2014 Revision 8 that continue to be applicable to National MUTCD 2023 Figures, are being

- retained and shown with markups with text comments added for explanation.
- **Green text and/or green rectangle**  and **Green highlighted text** - Changes in National MUTCD 2023 Figures and Tables, when compared to current CA MUTCD 2014 Revision 8 Figures (which were based on National MUTCD 2009) are shown with markups and text comments are added for explanation.
 - **Red text, black text with red strikethrough, "X" and/or red rectangle**  and **Red highlighted text** - New changes that are being proposed for the National MUTCD 2023 figures and tables or current CA MUTCD 2014 Revision 8 figures and tables are shown with markups and text comments are added for explanation. These changes are new, some of them are needed due to the changes in National MUTCD 2023, while others are based on current SME Workgroup member reviews and recommendations to improve CA MUTCD.

Attachments:

Attachment A – CA MUTCD 2026 Chapter 1A Draft (Text).

Attachment B – CA MUTCD 2026 Chapter 1B Draft (Text).

Attachment C – CA MUTCD 2026 Chapter 1B Draft (Figure Mark-ups).

Attachment D – CA MUTCD 2026 Chapter 1B Draft (Table Mark-ups).

Attachment E – CA MUTCD 2026 Chapter 1C Draft (Text).

Attachment F – CA MUTCD 2026 Chapter 1D Draft (Text).

Attachment G – CA MUTCD 2026 Chapter 1D Draft (Table Mark-ups).

Attachment H – CA MUTCD 2026 Part 1 – Public comments submitted, including responses/resolutions.

ATTACHMENT A

PART 1

GENERAL

CHAPTER 1A. GENERAL

Section 1A.01 Purpose of the MUTCD

Support:

- 01 The purpose of the MUTCD is to establish uniform national criteria for the use of traffic control devices that meet the needs and expectancy of road users on all streets, highways, pedestrian and bicycle facilities, and site roadways open to public travel. Refer to Section 1B.01 and 1C.02 (phrase “Site Roadways Open to Public Travel”) for applicability of CA MUTCD on various types of public and private roadway facilities.
- 02 This purpose is achieved through the following objectives:
- A. Promote safety, inclusion, and mobility for all users of the road network;
 - B. Promote efficiency through creating national uniformity in the meaning and appearance of traffic control devices;
 - C. Promote national consistency in the use, installation, and operation of traffic control devices; and
 - D. Provide basic principles for traffic engineers to use in making decisions regarding the use, installation, operation, maintenance, and removal of traffic control devices.
- 03 Uniformity of the meaning of traffic control devices is vital to their effectiveness. Uniformity means treating similar situations in a similar way. Uniformity of devices simplifies the task of the road user because it aids in recognition and understanding, thereby reducing perception/reaction time. Uniformity assists road users, law enforcement officers, and traffic courts by giving everyone the same interpretation. Uniformity assists public highway officials through efficiency in manufacture, installation, maintenance, and administration.
- 04 The use of uniform traffic control devices also requires uniform and appropriate application.
- 05 The applicability of the MUTCD to facilities open to public travel is independent of the type of ownership or jurisdiction (public or private) and the source of funding (Federal, State, local, or private). Refer to Section 1B.01 and 1C.02 (phrase “Site Roadways Open to Public Travel”) for applicability of CA MUTCD on various types of public and private roadway facilities.
- 06 This Manual presumes the user of the MUTCD has sufficient working knowledge, professional training and experience, and education in the principles of traffic engineering. Other resources can be consulted to understand the basis for decisions that are made in which engineering study or judgment will be applied.
- 07 This California Manual on Uniform Traffic Control Devices (California MUTCD) is published by the State of California, Caltrans and is issued to adopt uniform standards and specifications for all official traffic control devices in California, in accordance with Section 21400 of the California Vehicle Code (CVC).
- 08 This California MUTCD incorporates Federal Highway Administration's Manual on Uniform Traffic Control Devices (11th Edition) published on December 19, 2023, and the previous California MUTCD 2014 Revision 8, dated January 11, 2024. It also includes other editorial, errata and format changes that were necessary to update the previous documents.

Standard:

- 09 **The California MUTCD is hereby adopted as and shall be the standard for all official traffic control devices, under Section 11340.9(h) of California Government Code and Section 21400 of California Vehicle Code.**

Support:

- 10 California MUTCD is revised annually by end of March every year, based on California Traffic Control Devices Committee (CTCDC) quarterly meetings, agenda item proposals and discussions, leading to passing motion vote on the proposals, resulting in formal recommendations to Caltrans to incorporate and revise California MUTCD. To ensure that the traffic control device practitioner is accessing the most current information regarding traffic control device topics for California, the practitioner is advised to always reference the California MUTCD web site.
- 11 The California MUTCD, California Sign Specifications and other publications and related current information is available on the Internet at the following web link: <http://www.dot.ca.gov/programs/safety-programs>.

Section 1A.02 Traffic Control Devices – General Description

Support:

- 01 As defined in Section 1C.02 of this Manual, traffic control devices include all signs, signals, markings, channelizing devices, or other devices that use colors, shapes, symbols, words, sounds, and/or tactile information for the primary purpose of communicating a regulatory, warning, or guidance message to road users on a street, highway, pedestrian facility, bikeway, pathway, or site roadway open to public travel.
- 02 Infrastructure elements that restrict the road user's travel paths or vehicle speeds, such as islands, curbs, speed humps, and other raised roadway surfaces, are not traffic control devices. Transverse or longitudinal rumble strips are also not traffic control devices. Operational devices associated with the application of traffic control strategies such as fencing, roadway lighting, barriers, and attenuators are shown in this Manual for context, but their design, application, and usage are not specified since they are not traffic control devices.
- 03 Certain types of signs and other devices that do not have any traffic control purpose are sometimes placed within the highway right-of-way by or with the permission of the public agency or the official having jurisdiction over the street or highway. These signs and other devices are not considered to be traffic control devices and provisions regarding their design and use are not included in this Manual. Among these signs and other devices are the following:
- A. Devices whose purpose is to assist highway maintenance personnel, such as markers to guide snowplow operators, devices that identify culvert and drop inlet locations, and devices that precisely identify highway locations for maintenance or mowing purposes;
 - B. Devices whose purpose is to assist fire or law enforcement personnel, such as markers that identify fire hydrant locations, signs that identify fire or water district boundaries, speed measurement pavement markings, small indicator lights to assist in enforcement of red light violations, and photo enforcement systems;
 - C. Devices whose purpose is to assist utility company personnel and highway contractors, such as markers that identify underground utility locations;
 - D. Signs posting local non-traffic ordinances; and
 - E. Signs giving civic organization meeting information.

Section 1A.03 Target Road Users

Support:

- 01 Traffic control devices can be targeted at operators of motor vehicles, including driving automation systems, and at vulnerable road users.
- 02 Targeted operators of motor vehicles include motorists, public transportation operators, truck drivers, and motorcyclists. Targeted users also include vulnerable road users, who have little to no protection from crash forces. These users are defined in Title 23, U.S.C. 148(a). They include bicyclists and pedestrians, including persons with disabilities. Pedestrians with disabilities might be blind or vision-impaired, have mobility limitations, or other impairments. Protection of vulnerable users is a priority in this Manual as directed in Section 11135 of the Infrastructure Investment and Jobs Act.
- 03 Operators of motor vehicles and vulnerable road users are both likely to be present on roadways where adjacent land use suggests that trips could be served by varied modes. Application of traffic control devices on these roadways requires careful consideration of measures to set and design for appropriate speeds; separation of various users in time and space; improvement of connectivity and access for pedestrians, bicyclists, and transit riders, including for people with disabilities; and implementation of safety countermeasures.

Section 1A.04 Use of the MUTCD

Support:

- 01 Traffic control device principles in the MUTCD are developed for and used by individuals who are duly authorized and qualified to conduct traffic control device activities.

Standard:

- 02 **Where the content of this Manual requires a decision for implementation, such decisions shall be made by an engineer, or an individual under the supervision of an engineer, who has the appropriate levels of experience and expertise to make the traffic control device decision. Those decisions shall be made using engineering judgment or engineering study, as required by the MUTCD provision.**

Support:

- 03 Section 1C.02 contains definitions of “engineering study” and “engineering judgment.”

Guidance:

- 04 *In making traffic control device decisions, individuals should consider the impacts of the decision on the following: safety and operational efficiency (mobility) of all road users at that location, the effective use of agency resources, cost-effectiveness, and enforcement and education aspects of traffic control devices.*

Support:

- 05 Throughout this Manual the headings Standard, Guidance, Option, and Support, the meanings of which are defined in Section 1C.01, are used to classify the nature of the text that follows. Figures and tables, including the notes contained therein, supplement the text, and might constitute a Standard, Guidance, Option, or Support. The user needs to refer to the appropriate text to classify the nature of the figure, table, or note contained therein.

Guidance:

- 06 *Except when a specific numeral is required or recommended by the text of a Section of this Manual, numerals displayed on the images of devices in the figures that specify quantities such as times, distances, speed limits, and weights should be regarded as examples only. When installing any of these devices, the numerals should be appropriately altered to fit the specific situation.*
- 07 *Similarly, destination names, route numbers, and State route shields that are displayed on the images of devices in the figures should be regarded as examples only. When installing any of these devices, the destination names, route numbers, and State route shields should be appropriately altered to fit the specific situation.*

Support:

- 08 The information contained in Paragraphs 9 and 10 of this Section will be useful when reference is being made to a specific portion of text in this Manual.
- 09 There are nine Parts in this Manual, and each Part includes one or more Chapters. Each Chapter includes one or more Sections. Parts are identified by a single-digit numerical identification, such as “Part 2 – Signs.” Chapters are identified by the Part number and a letter, such as “Chapter 2B – Regulatory Signs.” Sections are identified by the Chapter number and letter followed by a decimal point and a 2-digit number, such as “Section 2B.03 – Size of Regulatory Signs.” In some Chapters, the Sections are grouped together by subject into unnumbered sub-chapters with a heading, such as “Signing for Right-of-Way at Intersections” (for Sections 2B.06 through 2B.20).
- 10 Each Section includes one or more paragraphs. The paragraphs are indented and are identified by a number. Paragraphs are counted from the beginning of each Section without regard to the intervening text headings (Standard, Guidance, Option, or Support) or any intervening text in embedded Figures or Tables. Some paragraphs have lettered or numbered items. As an example of how to cite this Manual, the phrase “[n]ot less than 40 feet beyond the stop line” that appears in Section 4D.08 of this Manual would be referenced in writing as “Section 4D.08, Par.1, A.1,” and would be verbally referenced as “Item A.1 of Paragraph 1 of Section 4D.08.”
- 11 The California MUTCD uses a format similar to the National MUTCD, as follows:
- A. It incorporates National MUTCD in its entirety and explicitly shows which portions thereof are applicable or not applicable in California.
 - B. The unedited National MUTCD text is shown in “Times New Roman” font with black color.
 - C. Text portions of the National MUTCD content that are not applicable in California are shown with a strikethrough of the black National MUTCD text and a blue margin line on the right to keep them distinct from the National MUTCD unedited black text.
 - D. The California text additions, including new paragraphs, and enhancements are incorporated into the combined document at appropriate locations and shown in an “Arial Narrow” font with blue color and a blue margin line on the right to keep them distinct from the National MUTCD content.
 - E. All National MUTCD figures and tables, or portions thereof, which are not applicable in California, are shown with appropriate size blue X cross-outs.

- F. National MUTCD figures and tables that have been modified or added to, in the California MUTCD retain the same MUTCD Figure or Table number but include “(CA)” to indicate that it is the California version of the MUTCD Figure or Table. For example:
 - 1. Figure 2C-1(CA) Horizontal Alignment Signs and Plaques
 - 2. Table 8B-1(CA) California Grade Crossing Sign and Plaque Minimum Sizes
- G. For California topics where there is no corresponding section, figure or table in the MUTCD, the California MUTCD gives a number that begins with the number 101 for that section, figure or table and increases in sequence, followed with a “(CA)” to indicate that this is a California created section, figure or table number. For example:
 - 1. Section 3B.101(CA) – Turnouts
 - 2. Figure 6H-101(CA) – Shoulder Closure on Urban (Low Speed) Locations to Accommodate Bicyclists
 - 3. Table 4D-103(CA) – Traffic Signal Timing Analysis Chart.

Section 1A.05 Relation to Other Publications

Standard:

- 01 **To the extent that they are incorporated by specific reference, the latest editions of the following publications shall be a part of this Manual: “Standard Highway Signs” publication (FHWA), and “Color Specifications for Retroreflective Sign and Pavement Marking Materials” (appendix to Subpart F of Part 655 of Title 23 of the Code of Federal Regulations).**

Support:

- 02 The “Standard Highway Signs” publication includes standard alphabets and symbols and arrows for signs and pavement markings.
- 03 The MUTCD is not a roadway design manual, and engineers seeking guidance on design should refer to appropriate roadway design guides recognized by the Federal Highway Administration as needed for the design application.
- 04 Other publications are referenced in this Manual as useful resources, but they are not regulatory in nature and are not independently legally enforceable.
- 05 Latest version of other publications are referenced in this Manual as useful resources of information with respect to the use of this Manual. For publication references that appear only once in this manual, as they are specific to a single section, these references are located within those sections throughout the chapters and parts of the manual. Any publication references that appear multiple times and referenced in multiple sections of this manual, are listed below:
- A. “California Business and Professions Code” (State of California)
 - B. “California Code of Regulations” (State of California)
 - C. “California Health and Safety Code” (State of California)
 - D. “California Streets and Highways Code” (State of California)
 - E. “California Vehicle Code” (CVC) (Department of Motor Vehicles)
 - F. “Highway Design Handbook For Older Drivers And Pedestrians” (Federal Highway Administration)
 - G. “Highway Design Manual” (Caltrans)
 - H. “High Occupancy Vehicle (HOV) Guidelines for Planning, Design, and Operations” (Caltrans)
 - I. “Maintenance Manual” (Caltrans)
 - J. “Ramp Meter Design Manual” (Caltrans)
 - K. “Standard Plans” (Caltrans)
 - L. “Standard Specifications” (Caltrans)
 - M. “Standard Special Provisions” (Caltrans)
 - N. “Traffic Manual” (Caltrans)
- 06 Following information can be used to access some of these publications referenced:
- A. State of California Code Publications & California Law <http://leginfo.legislature.ca.gov/faces/codes.xhtml>
 - B. Caltrans Manuals <https://dot.ca.gov/manuals>

Section 1A.06 Uniform Vehicle Code – Rules of the Road

Support:

- 01 The “Uniform Vehicle Code” (UVC) is one of the publications referenced in the MUTCD. The UVC contains a model set of motor vehicle codes and traffic laws for use throughout the United States, the intent of which is to promote

national uniformity in these laws. The Rules of the Road contained in the UVC are intended to be recommendations for States to adopt in their State statutes and are not independently legally enforceable.

Guidance:

- 02 *The actions required of road users to obey regulatory devices should be specified by State statute, or in cases not covered by State statute, in local ordinances or resolutions. Such statutes, ordinances, and resolutions should be consistent with the “Uniform Vehicle Code.” and “California Vehicle Code” (CVC).*

DRAFT

ATTACHMENT B

CHAPTER 1B. LEGAL REQUIREMENTS FOR TRAFFIC CONTROL DEVICES

Section 1B.01 National Standard

Standard:

- 01 The Manual on Uniform Traffic Control Devices for Streets and Highways (MUTCD) is incorporated by reference in 23 Code of Federal Regulations (CFR), Part 655, Subpart F and shall be recognized as the national standard for all traffic control devices installed on any street, highway, bikeway, or site roadway open to public travel (see definition in Section 1C.02) in accordance with 23 U.S.C. 109(d) and 402(a).
- 02 In accordance with 23 CFR 655.603(a), the MUTCD shall apply to all of the following types of facilities:
- A. Any street, roadway, or bikeway open to public travel, either publicly or privately owned;
 - B. Streets and roadways on sites that are off the public right-of-way that are open to public travel without full-time access restrictions. Examples include roadways within shopping centers, office parks, airports, sports arenas, other similar business and/or recreation facilities, governmental office complexes, schools, universities, recreational parks, and other similar publicly-owned complexes and/or recreation facilities. The above-described examples of streets and roadways are referred to in this Manual as site roadways open to public travel;
 - C. Publicly-owned toll roads, including those under the jurisdiction of a public agency, public authority, or public-private partnership;
 - D. Privately-owned toll roads where the public is allowed to travel without access restriction. This includes gated toll roads or roadways where the general public is able to pay to access the facility; and
 - E. Grade crossings of publicly-owned roadways with railroads or light rail transit.
- 03 The MUTCD shall not apply to the following types of facilities:
- A. Roadways within private gated properties where access to the general public is restricted at all times;
 - B. Grade crossings of privately-owned roadways with railroads; and
 - C. Parking areas, including the driving aisles within those parking areas, that are either publicly or privately owned.
- 03a In California, California MUTCD, which has been reviewed by FHWA CA Division and determined to be in substantial conformance with the National MUTCD, replaces the National MUTCD, and shall be the state standard for all official traffic control devices.
- 03b California MUTCD shall be the standard for all traffic control devices installed on all of the following types of facilities:
- A. Any highway or street that is publicly owned and maintained and open to the use of the public for purposes of vehicular travel. Refer to CVC Sections 360, 590, 21350, 21351, 21400 and 21401 and California Government Code Section 11340.9(h).
 - B. Any privately owned and maintained road, upon which a city or county has enacted an ordinance or resolution, regulating vehicular traffic. Refer to CVC Sections 21100, 21100.1, 21107, 21107.5, 21107.6 and 21107.7. This includes privately owned and maintained roads:
 - 1. That are generally held open for use by the public for vehicular travel and which so connect with highways that the public cannot determine that the roads are not highways. Refer to CVC Section 21107.5(a).
 - 2. Which are generally held open to the public for purposes of vehicular travel to serve commercial establishments. Refer to CVC Section 21107.6(a).
 - 3. That are not generally held open for use of the public for purposes of vehicular travel but, by reason of their proximity to or connection with highways, the interests of any residents residing along the roads and the motoring public will best be served by application of the provisions of this code to those roads. Refer to CVC Section 21107.7(a).
 - C. Any privately owned and maintained road, upon which the private property owner has erected a notice to the effect that the road is privately owned and maintained and that it is subject to public traffic regulations or control. Refer to CVC Sections 21100, 21100.1, 21107, 21107.5, 21107.6 and 21107.7.
- 03c California MUTCD shall not be applicable to any privately owned and maintained road under the following conditions:
- A. Any privately owned and maintained road upon which the owner has erected a notice of a size, shape, and color as to be readily legible during daylight hours from a distance of 100 feet to the effect that the road is privately owned and maintained and that it is not subject to public traffic regulations or control. Refer to CVC Sections 21107.5,

21107.6 and 21107.7.

- B. Any privately owned and maintained road upon which a city or county has not enacted an ordinance or resolution, regulating vehicular traffic. Refer to CVC Sections 21100, 21100.1, 21107, 21107.5, 21107.6 and 21107.7.**

Support:

- 03d The use of this Manual is encouraged on all privately owned and maintained roads, in general, as a good practice. See Section 1D.02 for more information.
- 04 The policies and procedures of the Federal Highway Administration (FHWA) to obtain basic uniformity of traffic control devices are as described in 23 CFR 655, Subpart F.
- 05 Section 15-116 of the UVC (see Section 1A.06) states, “No person shall install or maintain in any area of private property used by the public any sign, signal, marking, or other device intended to regulate, warn, or guide traffic unless it conforms with the State manual and specifications adopted under Section 15-104.” Adoption by agencies of such a provision through statute or ordinance can help maintain the integrity of official traffic control devices and provide continuity of uniformity at locations that are not subject to the provisions of this Manual.

Section 1B.02 State Adoption and Conformance

Support:

- 01 All States have officially adopted the National MUTCD either in its entirety, with supplemental provisions, or as a separate published document. The National MUTCD has also been adopted by the National Park Service, the U.S. Forest Service, the U.S. Military Command, the Bureau of Indian Affairs, the Bureau of Land Management, and the U.S. Fish and Wildlife Service.

Standard:

- 02 States or other Federal agencies that have their own MUTCDs or Supplements shall revise these MUTCDs or Supplements to be in substantial conformance with changes to the National MUTCD within 2 years of the effective date of the Final Rule for the changes [23 CFR 655.603(b)(3)]. Substantial conformance of such State or other Federal agency MUTCDs or Supplements shall be as defined in 23 CFR 655.603(b)(1).

Support:

- 02a On December 19, 2023, a Final Rule adopting the National MUTCD 2023 was published by Federal Highway Administration (FHWA) in the Federal Register with an effective date of January 18, 2024. Caltrans needs to revise the CA Manual on Uniform Traffic Control Devices (CA MUTCD) 2014 Revision 8 (issued on January 11, 2024) to bring it into substantial conformance with FHWA's National MUTCD 2023 and issue the revised CA MUTCD on or before January 18, 2026.
- 02b This California MUTCD supersedes and replaces the previously adopted (on January 11, 2024) California MUTCD 2014 Revision 8.

Standard:

- 03 For the purposes of Paragraph 2 of this Section, policies, directives, specifications, standard drawings, or similar documents that are issued by an agency and that change or modify Standard, Guidance, or Option provisions in this Manual shall be considered as supplements to the MUTCD and shall also be revised to be in substantial conformance with the National MUTCD.
- 04 In accordance with 23 CFR 655.603(b)(1), in addition to a State MUTCD or Supplement, supplemental documents that a State issues, including but not limited to policies, directives, standard drawings or details, and specifications, shall not contravene or negate Standard or Guidance statements in the National MUTCD.

Support:

- 05 Caltrans publishes Standard Plans, Standard Specifications, Standard Special Provisions and other manuals and guidelines, which in addition to other topics, also contain specifications and requirements for traffic control devices, including their use and placement, when performing work on State highways. For the traffic control device topic portion of the contents in these publications, these publications are considered to be supplemental documents to the California MUTCD. In some cases, the specifications and requirements for traffic control devices contained in these publications, although in compliance with the minimum standards of the California MUTCD and the National MUTCD, can be more stringent (higher standard) than those shown in the California MUTCD.

Standard:

- 06 On State highways, the California MUTCD shall mean to include, but not limited to, supplemental documents (for the traffic control device topic portion of the contents), such as Caltrans' publications of Standard Plans, Standard Specifications, Standard Special Provisions, Proven Safety Countermeasure publications, California Manual for Setting Speed Limits, other manuals, Traffic Calming Guide, other guidelines, Flagging Instructions Handbook, other handbooks, pamphlets, bulletins (including Traffic Safety Bulletins) and memos (including Traffic Operation Policy Directives (TOPD)).
- 07 Any revisions to these supplemental documents shall conform to, or not contravene or negate, any Standard and Guidance statements, figures, or tables of the California MUTCD.
- 08 The latest edition of Caltrans' California Sign Specifications shall be a part of this manual. If there are any discrepancies between the Sign Specifications and the California MUTCD, the California MUTCD shall govern. California Sign Specifications shall conform to, or not contravene or negate, any Standard and Guidance statements, figures or tables of the California MUTCD.

Support:

- 09 Refer to the following web link for Caltrans' California Sign Specifications: <https://dot.ca.gov/programs/safety-programs/sign-specs>

Section 1B.03 Compliance of Devices

Standard:

- 01 The U.S. Secretary of Transportation, under authority granted by the Highway Safety Act of 1966, decreed that traffic control devices on all streets and highways open to public travel in accordance with 23 U.S.C. 109(d) and 402(a) in each State shall be in substantial conformance with the Standards issued or endorsed by the FHWA.

Support:

- 02 23 CFR 655.603 also requires traffic control devices on all streets, highways, bikeways, and site roadways open to public travel in each State be in substantial conformance with standards issued or endorsed by the Federal Highway Administrator.

Standard:

- 03 After the effective date of a new edition of the MUTCD or a revision thereto, or after the adoption thereof by the State, whichever occurs later, new or reconstructed devices installed shall comply with the new edition or revision, as required by 23 CFR 655.603.

Standard:

- 03a For the purpose of the Standard in Paragraphs 4 and 5 of this Section, the reference to National MUTCD shall mean the California MUTCD. Refer to Sections 1A.01 and 1B.01 and CVC Sections 21400 and 21401 for more details.
- 04 In cases involving Federal-aid projects for new construction, reconstruction, resurfacing, restoration, or rehabilitation of a facility to which this Manual applies, the traffic control devices installed (temporary or permanent) shall comply with the most recent edition of the National MUTCD before that highway is opened or re-opened to the public for unrestricted travel [23 CFR 655.603(d)(2) and (d)(3)].
- 05 Unless a particular device is no longer serviceable (see definition in Section 1C.02), non-compliant devices on existing highways and bikeways shall be brought into compliance with the current edition of the National MUTCD as part of the systematic upgrading of substandard traffic control devices (and installation of new required traffic control devices) required pursuant to the Highway Safety Program, 23 U.S.C. §402(a).

Support:

- 06 The FHWA has the authority to establish other target compliance dates for implementation of particular changes to the MUTCD [23 CFR 655.603(d)(1)].

Standard:

- 07 The target compliance dates established by the FHWA shall be as shown in Table 1B-1 (Sheet 1 of 2). The target compliance dates previously established by the FHWA in the National MUTCD 2009 Edition shall be as shown in Table 1B-1(Sheet 2 of 2). The target compliance dates previously established by Caltrans pursuant to CTCDC recommendation shall be as shown in Table 1B-1(CA).

- 08 **Design, application, and placement of traffic control devices other than those adopted in this Manual shall be prohibited unless the provisions of Sections 1B.04 through 1B.08 are followed regarding official interpretations, experiments, changes to the MUTCD, and interim approvals granted by the FHWA.**

Support:

- 09 Many of the provisions in this Manual that are explicitly prohibitive have been included to address practices that have been shown to be ineffective, unsafe, or inconsistent with uniformity. A provision of mandatory or recommended practice represents the accepted and established practice that promotes uniformity and consistency. The absence of a provision in this Manual that explicitly prohibits a particular practice, use, design, application, operation, or other aspect of a traffic control device does not, in itself, constitute acceptability or permission to use the device in a manner not provided for in this Manual.

Guidance:

- 10 *Agencies should contact the FHWA when considering employing a practice or application that is not explicitly addressed in this Manual to ensure continued compliance with the provisions in this Manual.*

Support:

- 11 The FHWA reviews and interprets the provisions in this Manual for agencies on an as-needed basis, which can lead to the issuance of official interpretations (see Section 1B.04), or interim approvals (see Section 1B.07).

Standard:

- 12 **A non-compliant traffic control device that is being replaced or refurbished because it is damaged, missing, or no longer serviceable (see definition in Section 1C.02) for any reason shall be replaced with a compliant device, except as provided for in Paragraph 13 of this Section.**

Option:

- 13 A non-compliant traffic control device may be replaced in kind when engineering judgment indicates it is more appropriate because:
- A. One compliant device in the midst of a series of adjacent non-compliant devices would be confusing to road users, and/or
 - B. The schedule for replacement of the whole series of non-compliant devices will result in achieving timely compliance with the MUTCD.

- 14 Agencies may install traffic control devices included in previously approved construction plans that comply with the previous version of CA MUTCD.

- 15 Except for the traffic control devices with target compliance dates established by FHWA as shown in Table 1B-1 and those established by Caltrans using the CTCDC process and shown in Table 1B-1(CA), and traffic control devices that are not located within a construction work zone, all traffic control devices on existing highways and bikeways that have become non-compliant per California MUTCD adopted standards may remain in service through the end of their useful service life.

Section 1B.04 Interpretations

Support:

- 01 The FHWA issues authoritative interpretations of this Manual when necessary to provide clarity in response to unique situations for device application or general requests for clarification of a provision.
- 02 An interpretation includes a consideration of the application and operation of standard traffic control devices, the official meanings of standard traffic control devices, or the variations from standard device designs and design requirements.

Guidance:

- 03 *Requests for an interpretation of this Manual should contain the following information:*
- A. *A concise statement of the interpretation being sought;*
 - B. *A description of the condition that provoked the need for an interpretation;*
 - C. *Any illustration that would be helpful to understand the request; and*
 - D. *Any supporting research data that is pertinent to the item to be interpreted.*

Support:

- 04 Section 1B.08 contains information on submitting a request for interpretation.

Section 1B.05 Experimentation

Support:

- 01 Requests for experimentation (see Section 1B.08) include consideration of field deployment for the purpose of testing or evaluating a new traffic control device, its application or manner of use, or a provision not specifically described in this Manual.

Standard:

- 02 **A traffic control device or application that does not comply with the provisions of this Manual shall not be used on any street, highway, bikeway, or site roadway open to public travel (see definition in Section 1C.02) without first receiving official approval to experiment from the FHWA's Office of Transportation Operations.**

Support:

- 03 A request for permission to experiment (see Section 1B.08) will be considered only when submitted by the public agency or toll facility authority responsible for the operation of the road or street on which the experiment is to take place. For a site roadway open to public travel, the request will be considered only if it is submitted by the private owner or official having jurisdiction.
- 04 A request for experimentation with a novel device or application across multiple jurisdictions as a single experiment with a common hypothesis, evaluation plan, and evaluation team will be considered when submitted jointly by all the authorities responsible for operation of the roads or streets on which the experiment is to take place. Similarly, a request to add experimental sites to an experimentation approved for another jurisdiction will be considered when submitted jointly by the all the authorities for operation of the roads or streets on which the experiment is then to take place.
- 05 Manufacturers or inventors of novel devices are encouraged to engage the services of a qualified traffic engineer or other professional who is versed in traffic control devices. Early engagement during the concept and development processes will help ensure the efficacy of the device with regard to human factors, operational, safety, and other considerations prior to an agency requesting experimentation.
- 06 In some cases, an off-roadway closed-course or laboratory study might be required before a request for experimentation can be considered. The purpose of such a study is to determine whether testing the experimental device or application in an open-road setting could result in an undue safety risk.

Guidance:

- 07 *Before requesting permission to experiment with a new device or application, an owner of a site roadway open to public travel should first check for any laws, regulations, and/or directives covering the application of the MUTCD that might apply.*

Option:

- 08 An agency may request a preliminary assessment of the viability of a potential request for experimentation by submitting an abstract that briefly describes the experimental concept.

Support:

- 09 A diagram indicating the process for requesting and conducting experimentations with traffic control devices is shown in Figure 1B-1.

Standard:

- 10 **The request for permission to experiment shall contain the following:**
- A. A statement indicating the nature of the problem and a hypothesis establishing the premise of the experiment.**
 - B. A description of the proposed change to the traffic control device or application of the traffic control device, including the manner in which it deviates from the provisions of this Manual, and how it is expected to be an improvement over existing provisions.**
 - C. Illustrations that would help to explain the traffic control device or use of the traffic control device.**
 - D. Any supporting data explaining how the traffic control device was developed, including if it has been tested, in what ways it was found to be adequate or inadequate, and how this choice of device or**

application was derived.

- E. Comparison of the proposed device to other compliant devices or treatments, either individually or in combination, that address the same condition, if applicable.
 - F. A legally binding statement that the experimental device or application is in the public domain, in accordance with Paragraph 16 of this Section.
 - G. The time period and location(s) of the experiment.
 - H. Control sites for comparison purposes or justification for not using control sites.
 - I. A detailed research and evaluation plan that provides for close monitoring of the experimentation, throughout all stages of its field implementation. The evaluation plan shall include an appropriate evaluation methodology, such as before and after analysis, or other appropriate methodology as well as quantitative data describing the performance of the experimental device.
 - J. An agreement to provide semi-annual progress reports for the duration of the experimentation, in accordance with the schedule provided in Paragraph 12 of this Section, and an agreement to provide a report of the final results of the experimentation to the FHWA's Office of Transportation Operations within 3 months following completion of the experimentation (see Paragraph 14 of this Section). The FHWA's Office of Transportation Operations shall have the right to terminate approval of an agency's experiment if reports are not received in accordance with this schedule.
 - K. An agreement to restore the site of the experiment to a condition that complies with the provisions of this Manual within 3 months following the end of the time period of the experiment. This agreement shall also provide that the agency sponsoring the experimentation will terminate the experimentation at any time that it determines that safety concerns are directly or indirectly attributable to the experimentation and the agency shall provide timely notification to the FHWA's Office of Transportation Operations. The FHWA's Office of Transportation Operations shall have the right to terminate approval of the experimentation at any time if there is an indication of safety or operational concerns, or if the terms of the approval are not being adhered to. If, as a result of the experimentation, a request is made that this Manual be changed to include the device or application being experimented with, the FHWA's Office of Transportation Operations will determine whether the device or application can be permitted to remain in place until an official rulemaking action has occurred.
- 11 Where an item in Paragraph 10 of this Section is determined to not be applicable to the type of experiment, device, or application, the request shall provide sufficient explanation.
- 12 The required semi-annual progress reports shall be submitted throughout the course of an approved experiment in accordance with the following schedule:
- A. No later than August 1st for the preceding period of January through June; and
 - B. No later than February 1st for the preceding period of July through December.
- 13 The experimenting agency shall submit a semi-annual progress report for any approved experiment even if no work was performed during the previous reporting period. Failure to submit two consecutive progress reports shall result in termination of the experiment and shall constitute rescission of the FHWA's approval to the experimenting agency, requiring restoration of the site(s) to a condition that complies with the provisions of this Manual within 3 months.
- 14 The experimenting agency shall submit a final report within 3 months of the conclusion of an approved experiment. If a final report is not received by the FHWA's Office of Transportation Operations, and the experimenting agency fails to notify the FHWA of any mitigating circumstances within 6 months of the end of the approved experimentation period, then the experiment shall be considered terminated and shall constitute rescission of the FHWA's approval to the experimenting agency, requiring restoration of the site(s) to a condition that complies with the provisions of this Manual within 3 months.
- Support:
- 15 Under certain circumstances the FHWA Office of Transportation Operations might allow an experimental device or device application that has been shown to be effective and without safety concerns to remain in use after the experiment has ended. This typically would occur if the device or application is actively being considered for interim approval under the provisions of Section 1B.07.

Standard

- 16 A request for experimentation that involves a new traffic control device or a new application of an existing traffic control device shall include from the agency conducting the experiment, the manufacturer and/or developer of the device, and the supplier of the device, a legally-binding statement certifying that the traffic control device is not protected by a patent, trademark, or copyright in accordance with Section 1D.06, and that the traffic control device is in the public domain and can be used freely in traffic control device design and application without infringement or claim of trade secret misappropriation. The legally-binding statement shall also state that the agency conducting the experiment, the manufacturer and/or developer of the device, and the supplier of the device are aware that if patent, trademark, or copyright protection is established in the future for the device or application, such action will result in its removal from the MUTCD, cancellation of its interim approval, or cancellation of the authorization for experimentation.

Support:

- 17 For the purpose of the Standard in Paragraph 16 of this Section, traffic control device refers to those aspects of a sign, signal, marking or other device which regulates, warns, or guides traffic. The limitation on patent, trademark, or copyright protection does not include the legal protection of individual elements of such devices. For example, manufacturing methods, assembly methods, or individual components of such devices can be protected, whereas the traffic control device cannot be subject to protection so long as it remains in this Manual. As a further example, an internal circuit board for an electronic traffic control device can be legally protected, but the electronic traffic control device itself or its operational function cannot be legally protected by any of the above forms of intellectual property rights.

Support:

- 18 In addition to the requirements of the FHWA, experimental traffic control devices are subject to the laws, regulations and policies of the State of California.

Standard:

- 19 The agency shall request and receive approval from FHWA and Caltrans, prior to installation of experimentation devices on public roadways in California.

Guidance:

- 20 Caltrans should present the request to the California Traffic Control Devices Committee (CTCDC), prior to any agency's installation of experimentation devices on public roadways in California.

Support:

- 21 For information contact:

Executive Secretary,
California Traffic Control Devices Committee
<https://www.dot.ca.gov/programs/safety-programs/ctcdc>

- 22 The California MUTCD contains the official standards and policies of the State of California for the design, application, and placement of traffic control devices.

- 23 Experimentation is defined as research involving the acts of testing, evaluating, analyzing or discovering the effect of a specific device, principle, supposition, etc., usually carried out in an operational context. Experimentation could also be performed in a laboratory. The request for experimentation is a submission specifically requesting approval to use a non-standard device on public roadways for purposes of gathering verification data.

- 24 As used herein, the term "device" includes not only signs, signals, and markings, but also their application and manner of use.

Guidance:

- 25 Requests for experimentation, interpretation, or changes relating to the California edited portion of the California MUTCD should be sent to:

Executive Secretary,
California Traffic Control Devices Committee – MS36
P.O. Box 942874, Sacramento, CA-94274-0001

Support:

- 26 The following procedures apply to requests for experimentation:

Submission of Projects

27 A request for permission to experiment will be considered only when submitted by the public agency or private toll facility responsible for the operation of the road or street on which the experiment is to take place.

Guidance:

28 *Experimentation requests should contain the following information:*

- A. *A statement indicating the nature of the problem.*
- B. *A description of the proposed change, how it was developed, the manner in which it deviates from the standard, and how it is expected to be an improvement over existing standards.*
- C. *Any illustration, photograph, or videos, which would help, explain the experimental device or use of this device.*
- D. *Any supporting data as to how the experimental device was developed, if it has been tried, in what ways it was found to be adequate or inadequate, and how was this choice of device or application arrived at.*

Support:

29 Requests for experimentation that are submitted without an explanation of the objective, scope, and duration will be returned to the originator for amplification.

Procedure for Processing Requests

- A. All requests for experimentation will be reviewed by Caltrans (Secretary of the CTCDC) to determine whether other related experimentation has been scheduled, in process, or already completed.
- B. The Secretary of the CTCDC will list the experimentation proposal on the next CTCDC meeting agenda for review and recommendation. The Committee's recommendation would also include the specific guidelines to be followed for the experimentation.
- C. Action by Caltrans based on CTCDC recommendation on any request for experimental use of a non-conforming device could take several forms:
 1. Recommendation of the device for limited use on an experimental project, subject to FHWA approval.
 2. Recommendation of the device for limited use in a formal research project, subject to FHWA approval.
 3. Not recommended until such time as satisfactory research or other justification is submitted.
 4. Not recommended.
- D. If action by Caltrans based on CTCDC recommendation on any request for experimental use of a non-conforming device results in a recommendation of the device for limited use, the agency will need to submit the experimentation request to FHWA and receive official approval to experiment from the FHWA's Office of Transportation Operations, to conduct the experiment.
- E. After action by Caltrans based on CTCDC recommendation, the Secretary of the California Traffic Control Devices Committee will notify the originating party of its decision. If approved by FHWA, the originating parties will be requested to submit a status report on the experimental testing at appropriate intervals. When the results of experimentation are completed, a final report will be prepared and forwarded to the Secretary for Committee review.
- F. The agency receiving FHWA approval for experimentation must agree to faithfully follow the specific guidelines for the experimentation, must forward reports as indicated, and must agree to terminate the experimentation upon notification.

Specific Guidelines for Experimental Proposal

Guidance:

30 *A specific proposal should be submitted for each request.*

Support:

31 This proposal can be submitted with the initial request or could be a follow-up to specific comments by the CTCDC in their recommendation to Caltrans. The proposal, after FHWA approval, will become an integral part of the approved experimentation.

Guidance:

32 *Each proposal should include:*

- A. Scope: *A detailed description of the experimentation, locations of installation, and number of experimental projects.*
- B. Work Plan: *A description of the proposed plan of study; the variables that are to be measured; the criteria against which the devices is to be evaluated; observations, measures and data which will be collected; whether the experimentation will be carried out in the field or under laboratory conditions; how installations of the experimental device or application will be made; the indication if any adverse effects on safety or traffic operations can be anticipated, together with the means that*

may be taken to minimize them; and the factors which will be held constant or measured and controlled in order to ensure that the true effects of the device are measured.

- C. Time Periods: Time periods for experimentation will normally not be less than six months nor more than two years.
- D. Evaluation Procedures: Caltrans via CTCDC process will recommend needed changes to criteria, if any, which will be used to evaluate experimental devices or applications. To permit meaningful comparisons with standard installations, advice from specialists such as human factor experts, statisticians, etc., could be included.
- E. Reporting: A written status report must be forwarded to the sponsor 45 days prior to each public meeting. A final report must be completed within 90 days of the terminal date of the experimentation and forwarded to Caltrans (Secretary of the CTCDC). Status reports will describe the progress of the work, any particular deviation from the work plan and anticipated time of conclusion. The final report will contain, as a minimum, the basic information on the problem, the preliminary investigations, the proposed solutions, the study procedures, the detailed analysis of the data, the results of the work, a discussion of the results, and whatever conclusions are drawn. If a change in the California MUTCD is proposed, the recommended text (wording) for the California MUTCD should be included.
- F. Administration: All experimentation proposals will include the agency sponsoring the study, the agency conducting the study, and the name and titles of principal researchers. There must be proof of professional traffic engineering capabilities and other related professional expertise to perform the experimentation and related evaluation processes.

Termination of Experimentation

Standard:

- 33 **The project shall terminate at the end of the approved period unless an extension is granted in writing by FHWA, and all experimental devices and applications shall be removed unless specific permission is given for continued operation.**

Support:

- 34 FHWA could, at any time, terminate approval of experimentation if significant safety hazards are indicated to be directly or indirectly attributable to the experimentation. Approval of any experimentation could also be terminated if no status report is received 45 days prior to each public meeting or no final report is received within 90 days of the terminal date of the experimentation.

Removal of Experimentation Installations

Standard:

- 35 **All experimentation installations shall be removed upon termination of the experiment-when a decision is made by FHWA and Caltrans that the device is not warranted.**

Support:

- 36 Authority and reference cited for removal of experimentation installation is CVC Section 21400.

Section 1B.06 Changes to the MUTCD

Support:

- 01 Continuing advances in technology and approaches to traffic safety will produce changes in the highway, vehicle, and road-user proficiency; therefore, portions of the system of traffic control devices in this Manual will require updating. It is important to have a procedure for recognizing these developments and for introducing new ideas and modifications into the system.
- 02 A change includes consideration of a new device to replace a present standard device, an additional device to be added to the list of standard devices, or a revision to a traffic control device application or placement criteria.

Guidance:

- 03 *Requests for a change to this Manual (see Section 1B.08) should contain the following information:*
- A. *A statement indicating what change is proposed;*
 - B. *Any illustration that would be helpful to understand the request; and*
 - C. *Any supporting research data that is pertinent to the item to be reviewed.*

Support:

- 04 Requests for a change to this Manual will be evaluated to consider the potential safety and operational benefits of the requested change and be considered for inclusion in the future for consideration in the next rulemaking to issue a new edition or revision of the Manual. A diagram indicating the process for incorporating new traffic control devices into this Manual is shown in Figure 1B-2.

Section 1B.07 Interim Approvals

Support:

- 01 Interim approval allows for provisional use, pending official rulemaking, of a new traffic control device, a revision to the application or manner of use of an existing traffic control device, or a provision not specifically described in this Manual.
- 02 The FHWA issues an interim approval by official memorandum signed by the Associate Administrator for Operations and posts this memorandum on the MUTCD Web site.
- 03 Interim approval allows for the optional use of a traffic control device or application and does not create a new mandate or recommendation for its use. Interim approval includes conditions that jurisdictions, toll facility operators, or owners of site roadways open to public travel agree to comply with in order to use the traffic control device or application until an official rulemaking action has occurred.
- 04 The issuance by FHWA of an interim approval might result in the traffic control device or application being proposed for adoption in the next scheduled rulemaking process to issue a new edition or revision of this Manual. If the device or application under interim approval is not proposed in the next rulemaking for a new edition or revision, then a statement of the status of the interim approval, whether it is to be rescinded or remain in effect, will be included in the Federal Register notice for the rulemaking.
- 05 Interim approval is considered based on the results of experimentation, and/or results of analytical or laboratory studies with a traffic control device or application that analytically demonstrates a device effectively communicates its intended meaning. Interim approval considerations include an assessment of relative risks, benefits, costs, impacts, and other factors.
- 06 Section 1B.08 contains information on submitting a request for interim approval.
- 07 Interim approval is ordinarily considered only after published authoritative research and experimentation sufficiently demonstrate that the device or application provides a significant safety or operational improvement. Individual experiments by various jurisdictions, without a research report on the overall findings of the experimental device or application, will not ordinarily qualify for issuance of an interim approval.
- 08 Interim approval ordinarily is not considered based solely on non-U.S. experience with a new traffic control device or application. Differences in regulations, enforcement and penalties, and driver licensing requirements, among other factors, can result in dissimilar road-user behavior. Additionally, due to variations in conventions for traffic control device design, a non-U.S. traffic control device concept might need to be adapted to U.S. criteria to ensure consistency with the provisions and principles of this Manual. However, documented non-U.S. experience can be considered in the development of requests for experimentation (see Section 1B.05) and within the evaluation plan for traffic control device research.
- 08a Currently, no interim approvals have been issued by FHWA on the National MUTCD 2023 (11th Edition). Status of Interim Approvals issued by FHWA in California will be provided once FHWA issues the first interim approval for the National MUTCD 2023 (11th Edition).

Standard:

- 09 A jurisdiction, toll facility operator, or owner of a site roadway open to public travel that desires to use a traffic control device or application for which FHWA has issued an interim approval shall request and receive permission from FHWA in writing prior to applying the device or application.
- 10 The request to place a traffic control device or application under an existing interim approval shall contain the following:
- A. A description of where the device or application will be used, such as a list of specific locations or highway segments or types of situations, or a statement of the intent to use the device or application jurisdiction-wide;
 - B. An agreement to abide by the specific conditions for use of the device or application as contained in the FHWA's interim approval memorandum;
 - C. An agreement to maintain and continually update a list of locations where the device or application has been installed; and
 - D. An agreement to:
 1. Restore the site(s) of the interim approval to a condition that complies with the provisions in this Manual within 3 months following the issuance of a Final Rule on this traffic control device or

application; and

2. **Terminate use of the device or application installed under the interim approval at any time that it determines that safety concerns are directly or indirectly attributable to the device or application. The FHWA's Office of Transportation Operations shall have the right to terminate the interim approval at any time if there is an indication of safety, operational, or other concerns.**

Option:

- 11 A State may submit a request for permission to use a device or application under an existing interim approval for all jurisdictions in that State, as long as the request contains the information required in Paragraph 9 of this Section.

Support:

- 11a Figure 1A-101(CA) shows the process for the use of traffic control devices in California approved as interim approval by FHWA.

Standard:

- 12 A jurisdiction, toll facility operator, or owner of a site roadway open to public travel that elects to use a device or application under a statewide interim approval shall inform the State of its use of the device or application.
- 13 Under a statewide interim approval, the respective jurisdictions, toll facility operators, and owners of site roadways open to public travel shall maintain and continually update a record of all locations on their roads where the device or application is implemented (see Item C of Paragraph 9 of this Section) and shall furnish this information to the State.

Section 1B.08 Requesting Official Interpretations, Experiments, Changes to the MUTCD, or Interim Approvals

Guidance:

- 01 A local jurisdiction, toll facility operator, or owner of a site roadway open to public travel that is requesting permission to experiment or permission to use a device or application under an existing interim approval should first check for any State laws, regulations, and/or directives covering the application of the MUTCD provisions that might apply.

Standard:

- 02 Except as provided in Paragraph 3 of this Section, requests for an interpretation, permission to experiment, a change to the MUTCD, granting of an interim approval, or permission to use an existing interim approval shall be submitted electronically to the Federal Highway Administration (FHWA), Office of Transportation Operations, MUTCD team, at the following e-mail address: MUTCDofficialrequest@dot.gov.

Option:

- 03 If electronic submittal is not possible, requests for an interpretation, permission to experiment, a change to the MUTCD, granting of an interim approval, or permission to use an existing interim approval may instead be mailed to the Office of Transportation Operations, HOTO-1, Federal Highway Administration, 1200 New Jersey Avenue, SE, Washington, DC 20590.

Support:

- 04 Communications regarding other MUTCD matters that are not related to official requests will receive quicker attention if they are submitted electronically to the MUTCD Team Leader or to the appropriate individual MUTCD technical lead team member. Their e-mail addresses are available through the links contained on the "MUTCD Team" page on the MUTCD Web site at <http://mutcd.fhwa.dot.gov/team.htm>.
- 05 For additional information concerning interpretations, experimentation, changes, or interim approvals, visit the MUTCD Web site at <http://mutcd.fhwa.dot.gov>.

ATTACHMENT C

Figure 1B-1. Process for Requesting and Conducting Experimentations for New Traffic Control Devices

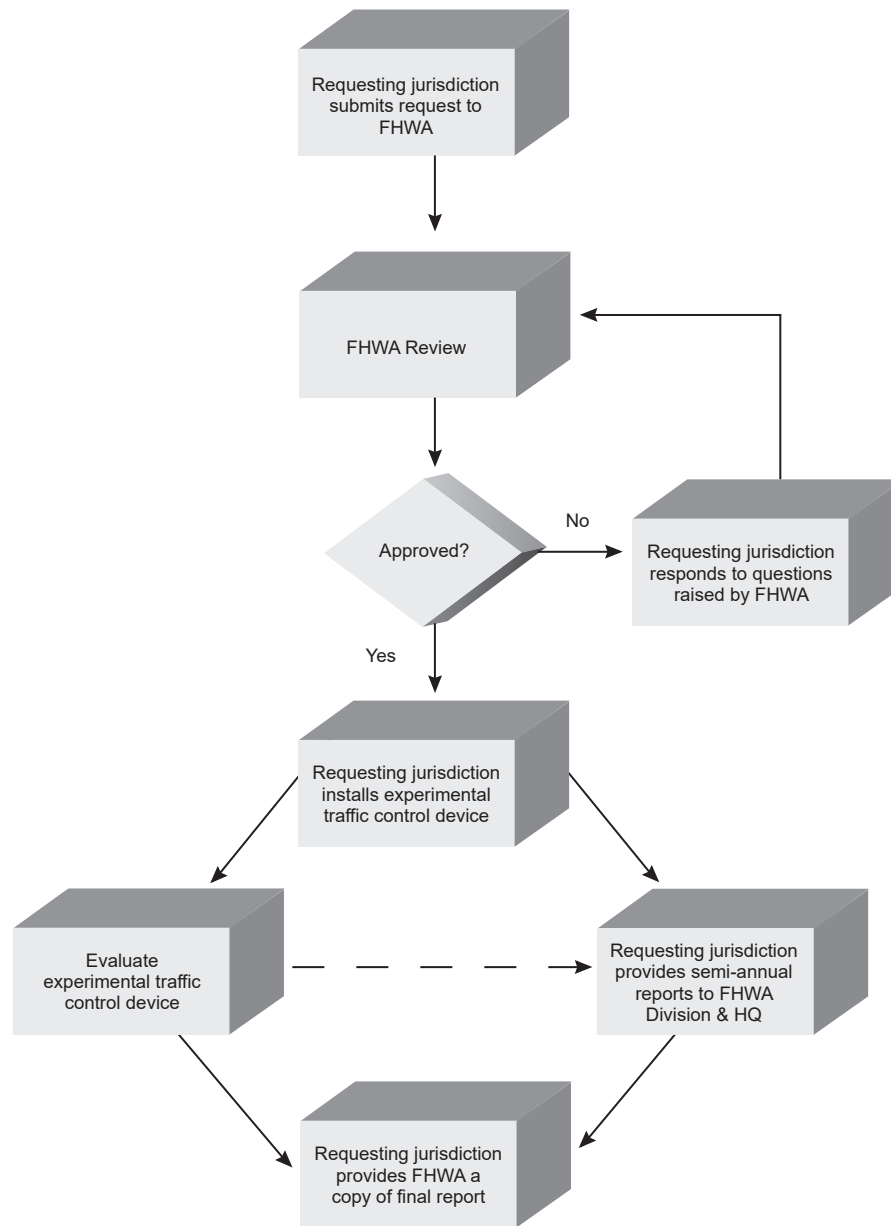


Figure 1A-1 (CA), Process for Requesting and Conducting Experimentations for New Traffic Control Devices in California



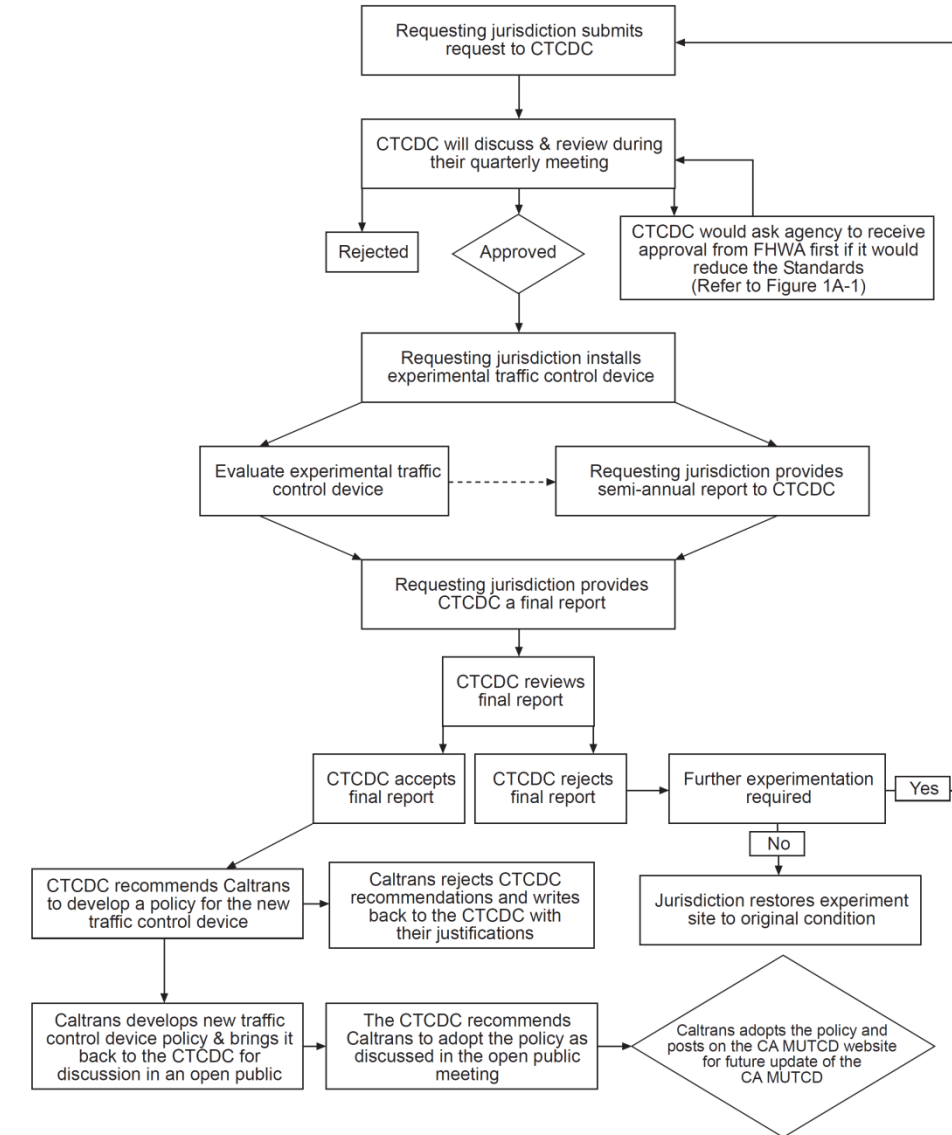


Figure 1B-2. Process for Incorporating New Traffic Control Devices into the MUTCD

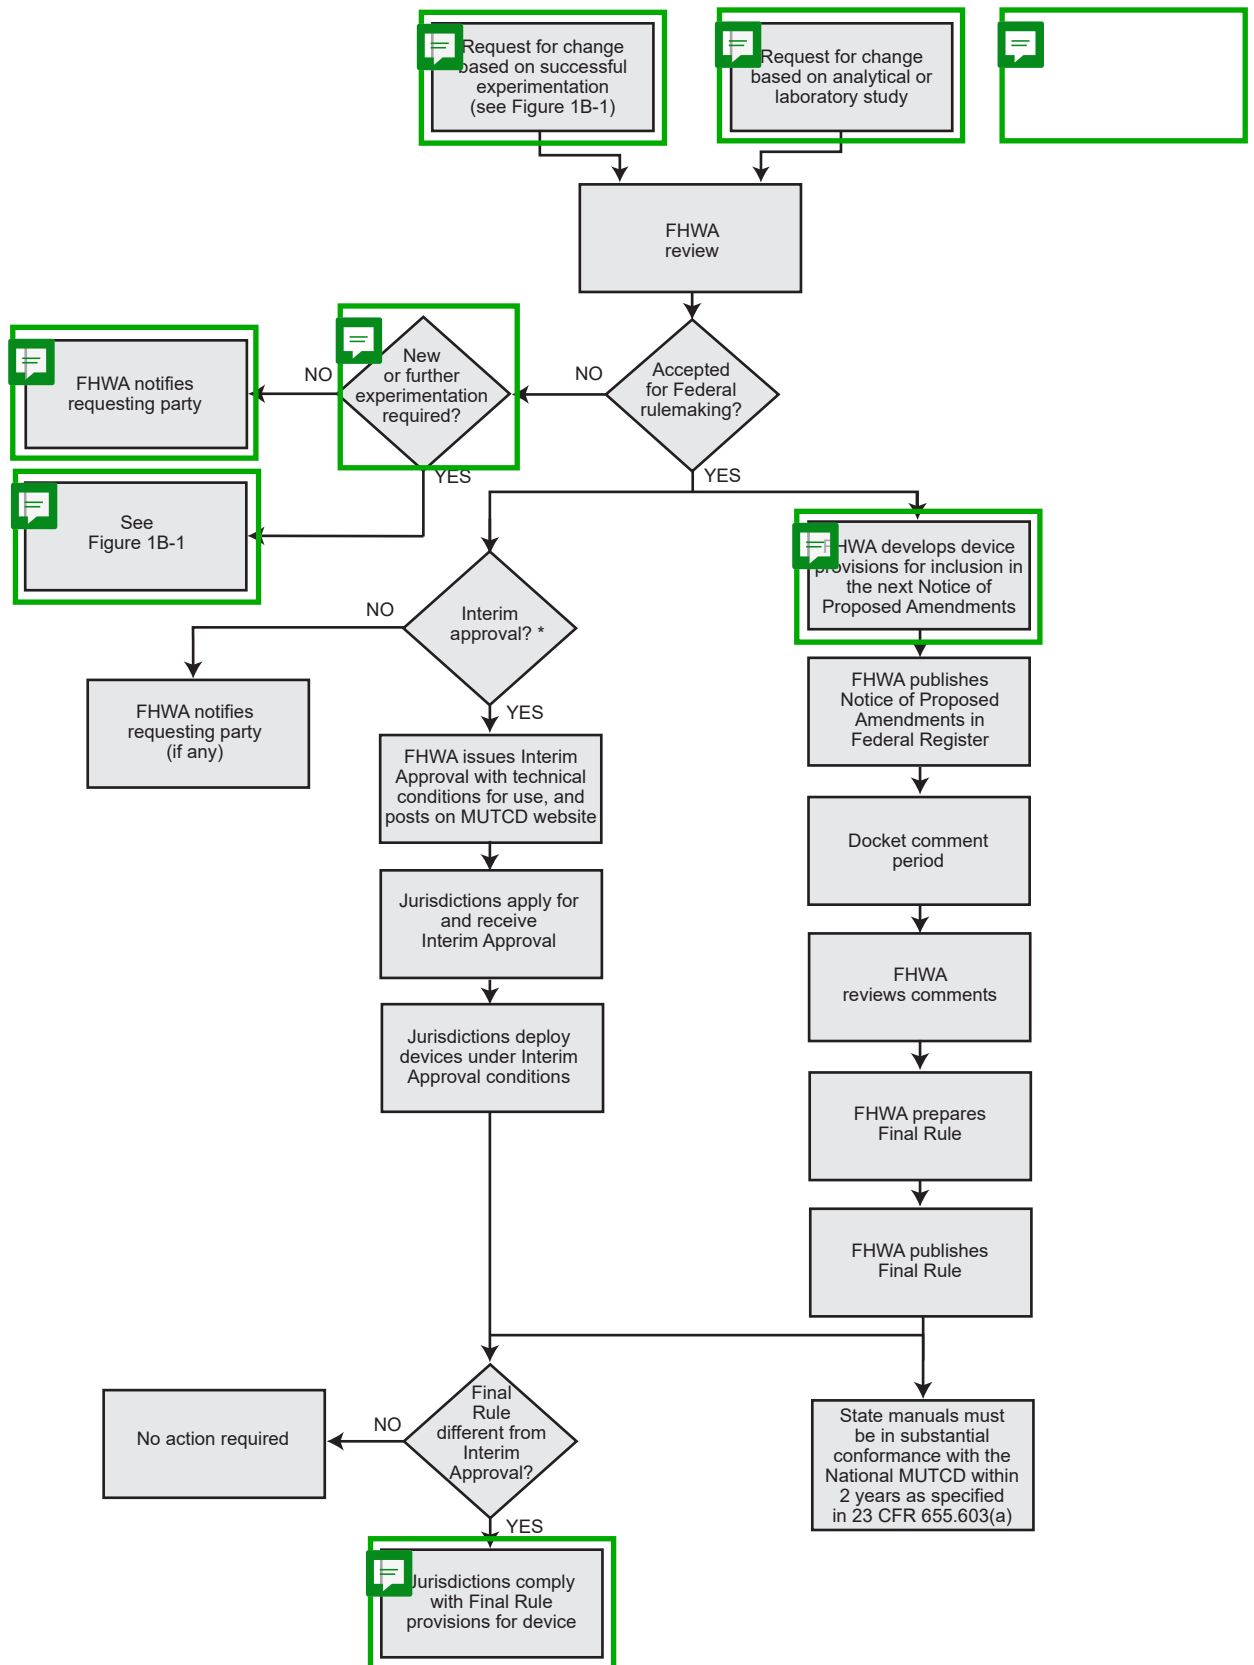

change request to allow the use of a new traffic control device is considered for Interim Approval when FHWA determines that the change will have a substantial national safety or operational benefit and that it would not be in the public interest to wait the intervening time period before the device could otherwise be officially incorporated into the MUTCD through rulemaking.

**Figure 1A-101 (CA). Process for the Use of Traffic Control Devices in California
Approved as Interim Approval (IA) by FHWA**

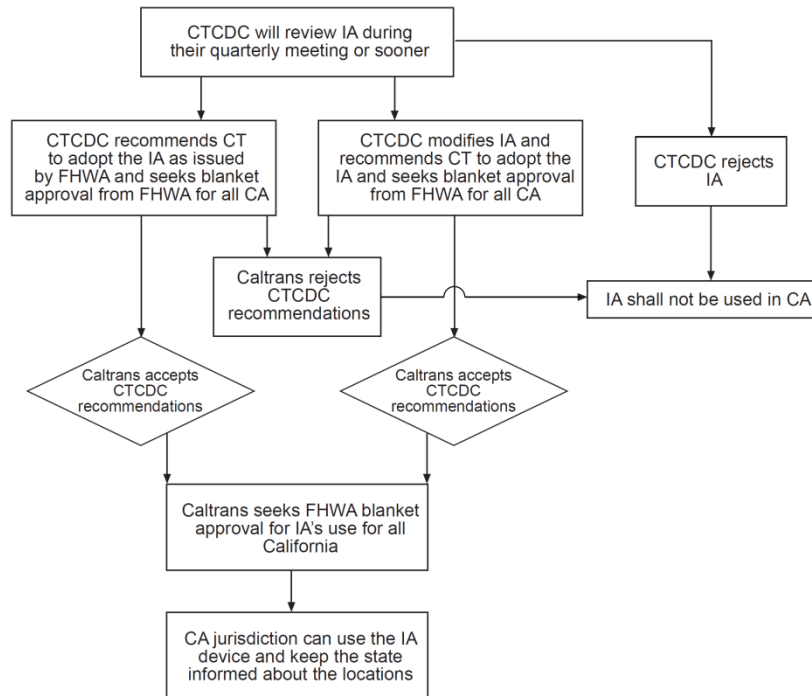

ATTACHMENT D

Table 1B-1. Target Compliance Dates Established by the FHWA

MUTCD Section(s)	Subject Area	Specific Provision	Compliance Date
2B.64	Weight Limit Signs	Paragraph 14 - requirement for additional Weight Limit sign with the advisory distance or directional legend in advance of applicable section of highway or structure	5 years from the effective date of this edition of the MUTCD
2C.25	Low Clearance Signs (W12-2)	Paragraph 1 - Required posting of the Low Clearance Advance (W12-2) sign in advance of the structure	5 years from the effective date of this edition of the MUTCD
2C.25	Low Clearance Signs (W12-2a, W12-2b)	Paragraph 8 - Recommended posting of Low Clearance Overhead (W12-2a or 12-2b) signs on an arch or other structure under which the clearance varies greatly	5 years from the effective date of this edition of the MUTCD
3A.05	Maintaining Minimum Retroreflectivity	Implementation and continued use of a method that is designed to maintain retroreflectivity of longitudinal pavement markings (see Paragraph 1 of Section 3A.05)	September 6, 2026
8B.16	High-Profile Grade Crossings	Paragraphs 3 and 7 - Recommended installation of Low Ground Clearance and/or Vehicle Exclusion signs and detour signs for vehicles with low ground clearances that might hang up on high-profile grade crossings at locations with a known history	5 years from the effective date of this edition of the MUTCD
8D.09 through 8D.12	Highway Traffic Signals at or Near Grade Crossings	Assessment and determination of appropriate treatment to achieve compliance (preemption, movement prohibition, pre-signals, queue cutter signals)	10 years from the effective date of this edition of the MUTCD

Table I-2. Target Compliance Dates Established by the FHWA

2009 MUTCD Section Number(s)	2009 MUTCD Section Title	Specific Provision	Compliance Date
2A.08	Maintaining Minimum Retroreflectivity	Implementation and continued use of an assessment or management method that is designed to maintain regulatory and warning sign retroreflectivity at or above the established minimum levels (see Paragraph 2)	June 13, 2014*
2A.19	Lateral Offset	Crashworthiness of sign supports on roads with posted speed limit of 50 mph or higher (see Paragraph 2)	January 17, 2013 (date established in the 2009 MUTCD)
2B.40	ONE WAY Signs (R6-1, R6-2)	New requirements in the 2009 MUTCD for the number and locations of ONE WAY signs (see Paragraphs 4, 9, and 10)	December 31, 2019
2C.06 through 2C.14	Horizontal Alignment Warning Signs	Revised requirements in the 2009 MUTCD regarding the use of various horizontal alignment signs (see Table 2C-5)	December 31, 2019
2E.31, 2E.33, and 2E.36	Plaques for Left-Hand Exits	New requirement in the 2009 MUTCD to use E1-5aP and E1-5bP plaques for left-hand exits	December 31, 2014
3A.03	Maintaining Minimum Retroreflectivity	Implementation and continued use of a method that is designed to maintain retroreflectivity of longitudinal pavement markings (see Paragraph 1)	September 6, 2026 4 years from the effective date of this revision of the MUTCD
4D.26	Yellow Change and Red Clearance Intervals	New requirement in the 2009 MUTCD that durations of yellow change and red clearance intervals shall be determined using engineering practices (see Paragraphs 3 and 6)	June 13, 2014, or when timing adjustments are made to the individual intersection and/or corridor, whichever occurs first
4E.06	Pedestrian Intervals and Signal Phases	New requirement in the 2009 MUTCD that the pedestrian change interval shall not extend into the red clearance interval and shall be followed by a buffer interval of at least 3 seconds (see Paragraph 4)	June 13, 2014, or when timing adjustments are made to the individual intersection and/or corridor, whichever occurs first
6D.03**	Worker Safety Considerations	New requirement in the 2009 MUTCD that all workers within the right-of-way shall wear high-visibility apparel (see Paragraphs 4, 6, and 7)	December 31, 2011
6E.02**	High-Visibility Safety Apparel	New requirement in the 2009 MUTCD that all flaggers within the right-of-way shall wear high-visibility apparel	December 31, 2011
7D.04**	Uniform of Adult Crossing Guards	New requirement in the 2009 MUTCD for high-visibility apparel for adult crossing guards	December 31, 2011
8B.03, 8B.04	Grade Crossing (Crossbuck) Signs and Supports	Retroreflective strip on Crossbuck sign and support (see Paragraph 7 in Section 8B.03 and Paragraphs 15 and 18 in Section 8B.04)	December 31, 2019
8B.04	Crossbuck Assemblies with YIELD or STOP Signs at Passive Grade Crossings	New requirement in the 2009 MUTCD for the use of STOP or YIELD signs with Crossbuck signs at passive grade crossings	December 31, 2019

* Types of signs other than regulatory or warning are to be added to an agency's management or assessment method as resources allow.

** MUTCD requirement is a result of a legislative mandate.

Note: All compliance dates that were previously published in Table I-2 of the 2009 MUTCD and that do not appear in this revised table have been eliminated.

Table I-2(CA). Target Compliance Dates Established by the CTCDC/Caltrans

2014 CA MUTCD Section Number(s)	2014 CA MUTCD Section Title	Specific Provision	Compliance Date
4D.26	Yellow Change & Red Clearance Intervals	Signalized intersections equipped with Red Light Cameras shall comply with 2014 CA MUTCD, Section 4D.26	August 1, 2015
4D.26	Yellow Change & Red Clearance Intervals	All signalized intersections shall comply with 2014 CA MUTCD, Section 4D.26	August 1, 2017

ATTACHMENT E

CHAPTER 1C. DEFINITIONS, ACRONYMS, AND ABBREVIATIONS USED IN THIS MANUAL

Section 1C.01 Definitions of Headings Used in this Manual

Standard:

- 01 When used in this Manual, the text headings of Standard, Guidance, Option, and Support shall be defined as follows:
- A. **Standard**—a statement of required, mandatory, or specifically prohibitive practice regarding a traffic control device. In limited, location-specific cases, the results of a documented engineering study (see Section 1D.03) might indicate a deviation from one or more requirements of a Standard provision to be appropriate. All Standard statements are labeled, and the text appears in bold type. The verb “shall” is typically used. The verbs “should” and “may” are not used in Standard statements. Standard statements are sometimes modified by Option statements.
 - B. **Guidance**—a statement of recommended practice in typical situations, with deviations allowed if engineering judgment or engineering study (see Section 1D.03) indicates the deviation to be appropriate. All Guidance statements are labeled, and the text appears in unbold italic type. The verb “should” is typically used. The verbs “shall” and “may” are not used in Guidance statements. Guidance statements are sometimes modified by Option statements.
 - C. **Option**—a statement of practice that is a permissive condition and carries no requirement or recommendation. Option statements sometimes contain allowable modifications to a Standard or Guidance statement. All Option statements are labeled, and the text appears in unbold type. The verb “may” is typically used. The verbs “shall” and “should” are not used in Option statements.
 - D. **Support**—an informational statement that does not convey any degree of mandate, recommendation, authorization, prohibition, or enforceable condition. Support statements are labeled, and the text appears in unbold type. The verbs “shall,” “should,” and “may” are not used in Support statements.

Section 1C.02 Definitions of Words and Phrases Used in this Manual

Standard:

- 01 Unless otherwise defined in this Section, or in other Parts of this Manual, words or phrases shall have the meaning(s) as defined in the “Uniform Vehicle Code,” “AASHTO Transportation Glossary (Highway Definitions),” “California Vehicle Code” or other appropriate publications.
- 02 Where a term that is defined in this Section or elsewhere in this Manual has a different definition in another resource or in common use, the definition herein shall govern for purposes of the applicability of the provisions of this Manual.
- 03 The following words and phrases, when used in this Manual, shall have the following meanings:
- 1. **Accessible Pedestrian Signal**—a device that communicates information about pedestrian signal timing in a non-visual format such as audible tones and/or speech messages and vibrating surfaces.
 - 2. **Accessible Pedestrian Signal Detector**—a device designated to assist the pedestrian who has vision or physical disabilities in activating the pedestrian phase.
 - 3. **Active Grade Crossing**—a grade crossing equipped with automatic traffic control devices, such as flashing-light signals, gates, and/or traffic control signals, that are activated upon the detection of approaching rail traffic.
 - 4. **Actuated**—a type of traffic control signal operation in which some or all signal phases are operated on the basis of actuation.
 - 5. **Actuation**—initiation of, a change in, or an extension of a traffic signal phase or a sign legend through the operation of any type of detector.
 - 6. **Advance Preemption**—the notification of approaching rail traffic that is forwarded to the highway traffic signal controller unit or assembly by the railroad or light rail transit equipment in advance of the activation of the railroad or light rail transit warning devices.
 - 7. **Advance Preemption Time**—the period of time that is the difference between the required maximum highway traffic signal preemption time and the activation of the railroad or light rail transit warning devices.

8. **Advisory Speed**—a recommended speed for all vehicles operating on a section of highway and based on the highway design, operating characteristics, and conditions.
9. **Agency**—an organization with the responsibility for providing, maintaining, and/or operating a public or private road system.
10. **Alley**—a street or highway intended to provide access to the rear or side of lots or buildings in urban areas and not intended for the purpose of through vehicular traffic. **As per CVC 110, “Alley” is any highway having a roadway not exceeding 25 feet in width which is primarily used for access to the rear or side entrances of abutting property; provided, that the City and County of San Francisco may designate by ordinance or resolution as an “alley” any highway having a roadway not exceeding 25 feet in width.**
11. **Annual Average Daily Traffic (AADT)**—the total volume of traffic passing a point or segment of a highway facility in both directions for one year divided by the number of days in the year. Normally, periodic daily traffic volumes are adjusted for hours of the day counted, days of the week, and seasons of the year to arrive at annual average daily traffic.
12. **Application**—in regard to a traffic control device, the act of deciding to use a device, generally or at a particular location for a particular condition.
13. **Approach**—all lanes of traffic moving toward an intersection or a midblock location from one direction, including any adjacent parking lane(s).
14. **Arterial Highway (Street)**—a general term denoting a highway primarily used by through traffic, usually on a continuous route or a highway designated as part of an arterial system.
15. **Automated Vehicle**—see Driving Automation System.
16. **Automatic Lane**—see Exact Change Lane within the definition of Toll Collection.
17. **Average Daily Traffic (ADT)**—the average 24 hour volume, being the total volume during a stated period divided by the number of days in that period. Normally, this would be periodic daily traffic volumes over several days, not adjusted for days of the week or seasons of the year.
18. **Average Day**—a day representing traffic volumes normally and repeatedly found at a location, typically a weekday when volumes are influenced by employment or a weekend day when volumes are influenced by entertainment or recreation.
19. **Backplate**—see Signal Backplate.
20. **Barrier-Separated Lane**—a preferential lane or other special purpose lane that is separated from the adjacent general-purpose lane(s) by a physical barrier.
21. **Beacon**—a highway traffic signal with one or more signal indications that operates in a flashing mode. Types of beacons include:
 - (a) **Emergency-Vehicle Hybrid Beacon**—a special type of beacon (see Hybrid Beacon).
 - (b) **Intersection Control Beacon**—a beacon used only at an intersection to control two or more directions of travel.
 - (c) **Pedestrian Hybrid Beacon**—a special type of beacon (see Hybrid Beacon).
 - (d) **Rectangular Rapid-Flashing Beacon (RRFB)**—a pedestrian-activated and/or bicycle- activated device comprising two horizontally arranged, rapidly flashed, rectangular-shaped yellow indications that is used to provide supplemental emphasis for a pedestrian, school, or trail crossing warning sign at a marked crosswalk across an uncontrolled approach.
 - (e) **Speed Limit Sign Beacon**—a beacon used only to supplement a SPEED LIMIT sign.
 - (f) **Stop Beacon**—a beacon used only to supplement a STOP sign, a DO NOT ENTER sign, or a WRONG WAY sign.
 - (g) **Warning Beacon**—a beacon used only to supplement an appropriate warning or regulatory sign or marker.
22. **Bicycle**—a pedal-powered vehicle upon which the human operator sits. **Also see Electric Bicycle (CVC 312.5) and Pedicab (CVC 467.5). As per CVC 231, A bicycle is a device upon which a person may ride, propelled exclusively by human power, except as provided in Section 312.5, through a belt, chain, or gears, and having one or more wheels. A person riding a bicycle is subject to the provisions of this code specified in Sections 21200 and 21200.5. An electric bicycle is a bicycle. Also refer to CVC 39000 and S&H Code Section 890.2.**
23. **Bicycle Box**—a designated area on the approach to a signalized intersection, between an advance motorist stop line and the crosswalk or intersection, intended to provide bicyclists a visible place to wait

in front of stopped motorists during the red signal phase.

24. **Bicycle Facilities**—a general term denoting improvements and provisions that accommodate or encourage bicycling, including parking and storage facilities, and shared roadways not specifically defined for bicycle use.
25. **Bicycle Lane (See Class II Bikeway)** — a portion of a roadway that has been designated for preferential or exclusive use by bicyclists. A "bicycle lane" or "bike lane" is a Class II bikeway, as defined in subdivision (a) of Section 890.4 of the Streets and Highways Code. A typical bicycle lane is delineated from the adjacent general-purpose lane(s) by longitudinal pavement markings and bicycle lane symbol or word markings and, if used, signs. Other types of bicycle lanes include:
 - (a) **Buffer-Separated Bicycle Lane (See Class II Bikeway)** —a bicycle lane that is separated from the adjacent general-purpose lane(s) by a pattern of standard longitudinal pavement markings that is wider than a normal or wide lane line marking. . A "buffer-separated bicycle lane" or "buffer-separated bike lane" is a Class II Bikeway, Bicycle Lane or Bike Lane. Refer to California Streets and Highways Code Section 890.4.
 - (b) **Counter-Flow Bicycle Lane (See Class II and Class IV Bikeways)** —a one-directional bicycle lane that provides a lawful path of travel for bicycles in the opposite direction from general traffic on a roadway that allows general traffic to travel in only one direction. Counter-flow bicycle lanes are designated by the traffic control devices used for other bicycle lanes. A "counter-flow bicycle lane" or "counter-flow bike lane" can be a Class II Bikeway, Bicycle Lane or Bike Lane or it can be a Class IV Bikeway, such as a cycle track or separated bikeway. Refer to California Streets and Highways Code Section 890.4.
 - (c) **Separated Bicycle Lane (See Class II or Class IV Bikeway)** —an exclusive facility for bicyclists that is located within or directly adjacent to the roadway and that is physically separated from motor vehicle traffic with a vertical element. Separated bicycle lanes are differentiated from other bicycle lanes by a vertical element. A "separated bicycle lane" or "separated bike lane" can be a Class II Bikeway, Bicycle Lane or Bike Lane or it can be a Class IV Bikeway, such as a cycle track or separated bikeway. Refer to California Streets and Highways Code Section 890.4.
- 25a. **Bicycle Path or Bike Path** – See Class I Bikeway. As per CVC Section 231.5, a "bicycle path" or "bike path" is a Class I Bikeway or "shared-use path", as defined in subdivision (a) of Section 890.4 of the Streets and Highways Code.
- 25b. **Bicycle Path Crossing** – As per CVC Section 231.6,
 1. A "bicycle path crossing" is either of the following:
 - a. That portion of a roadway included within the prolongation or connection of the boundary lines of a bike path at intersections where the intersecting roadways meet at approximately right angles.
 - b. Any portion of a roadway distinctly indicated for bicycle crossing by lines or other markings on the surface.
 2. Notwithstanding subdivision (a), there shall not be a bicycle path crossing where local authorities have placed signs indicating no crossing.
26. **Bicycle Signal Face**—a signal face that displays only bicycle symbol signal indications, that exclusively controls a bicycle movement from a designated bicycle lane or from a separate facility such as a shared-use path, and that displays signal indications that are applicable only to the bicycle movement.
27. **Bicycle Symbol Signal Indication**—a red, yellow, or green signal indication that displays a bicycle symbol rather than a circular or arrow indication.
28. **Bikeway**—a generic term for any road, street, path, or way that in some manner is specifically designated for bicycle travel, regardless of whether such facilities are designated for the exclusive use of bicycles or are to be shared with other transportation modes. As per Streets and Highway Code Section 890.4, "bikeway" means all facilities that provide primarily for, and promote, bicycle travel.
- 28a. **Bike Route** – See Class III Bikeway.
- 28b. **Buffered Bicycle Lane** – A buffered bicycle lane is a bicycle lane that is separated from the adjacent general-purpose lane or parking lane by a pattern of standard longitudinal markings. The buffer area might include chevron or diagonal markings.
29. **Blank-Out Sign**—a sign that displays a single predetermined message only when activated. When not activated, the sign legend is not visible.
- 29a. **Buffer-Separated Bicycle Lane** - See Class II Bikeway.

30. **Buffer-Separated Lane**—a preferential lane or other special purpose lane that is separated from the adjacent general-purpose lane(s) by a pattern of standard longitudinal pavement markings that is wider than a normal or wide lane line marking. The buffer area might include rumble strips, textured pavement, or channelizing devices such as tubular markers or traversable curbs, but does not include a physical barrier.
- 31a. **Business Activity District** – As per CVC Section 22358.9(b), a “business activity district” is that portion of a highway and the property contiguous thereto that includes central or neighborhood downtowns, urban villages, or zoning designations that prioritize commercial land uses at the downtown or neighborhood scale and meets at least three of the following requirements in paragraphs (1) to (4), inclusive:
- (a) No less than 50 percent of the contiguous property fronting the highway consists of retail or dining commercial uses, including outdoor dining, that open directly onto sidewalks adjacent to the highway.
 - (b) Parking, including parallel, diagonal, or perpendicular spaces located alongside the highway.
 - (c) Traffic control signals or stop signs regulating traffic flow on the highway, located at intervals of no more than 600 feet.
 - (d) Marked crosswalks not controlled by a traffic control device.
- 31b. **Business District** – As per CVC Section 235, a “business district” is that portion of a highway and the property contiguous thereto
- (a) upon one side of which highway, for a distance of 600 feet, 50 percent or more of the contiguous property fronting thereon is occupied by buildings in use for business, or
 - (b) upon both sides of which highway, collectively, for a distance of 300 feet, 50 percent or more of the contiguous property fronting thereon is so occupied.
- A business district may be longer than the distances specified in this section if the above ratio of buildings in use for business to the length of the highway exists. Refer to CVC Sections 240 and 515, to determine whether a highway is within a business or residence district.
31. **Business Identification Sign Panel**—a panel containing a word legend or logo used to identify a business on a Specific Service sign.
32. **Busway**—a traveled way that is used exclusively by buses.
- 32a. **California Sign Specifications** – Detailed drawings of signs approved by Caltrans for use in California.
33. **Cantilevered Signal Structure**—a structure, also referred to as a mast arm, that is rigidly attached to a vertical pole and is used to provide overhead support of highway traffic signal faces or grade crossing signal units.
34. **Center Line Markings**—the yellow pavement marking line(s) that delineates the separation of traffic lanes that have opposite directions of travel on a roadway. These markings need not be at the geometrical center of the pavement.
35. **Changeable Message Sign**—a sign that is capable of displaying more than one message (one of which might be a “blank” display), changeable manually, by remote control, or by automatic control. Electronic-display changeable message signs are referred to as Dynamic Message Signs in the National Intelligent Transportation Systems (ITS) Architecture and are referred to as Variable Message Signs in the National Electrical Manufacturers Association (NEMA) standards publication.
36. **Channelizing Line**—a solid wide or double white line marking used to form islands where traffic in the same direction of travel is permitted on both sides of the island.
37. **Circular Intersection**—an intersection that has an island, generally circular in design, located in the center of the intersection where traffic passes to the right of the island. Circular intersections include roundabouts, rotaries, and traffic circles.
38. **Circulatory Roadway**—the roadway within a circular intersection on which traffic travels in a counterclockwise direction around an island in the center of the circular intersection.
- 38a. **Civil Engineer** - a professional engineer in the branch of civil engineering and refers to one who practices or offers to practice civil engineering in any of its phases. Refer to California Business and Professions Code Section 6702.
- 38b. **Class I Bikeway** (such as a Bike Path or a Shared-Use Path) – Provides a completely separated right-of-way designated for the exclusive use of bicycles and pedestrians with crossflows by motorists minimized. Refer California Streets and Highways Code Section 890.4. Refer to Caltrans’ Highway Design Manual Index 1003.1 for design criteria.

- 38c. **Class II Bikeway (such as a Bike Lane)** – Provides a restricted right-of-way designated for the exclusive or semi-exclusive use of bicycles with through travel by motor vehicles or pedestrians prohibited, but with vehicle parking and crossflows by pedestrians and motorists permitted. Refer to California Streets and Highways Code Section 890.4. Refer to Caltrans' Highway Design Manual Index 1003.2 for design criteria.
- 38d. **Class III Bikeway (such as a Bike Route)** – provide a right-of-way designated by signs or permanent markings and shared with pedestrians or motorists. Refer to California Streets and Highways Code Section 890.4. Refer to Caltrans' Highway Design Manual Index 1003.3 for design criteria.
- 38e. **Class IV Bikeway (such as a cycle track or separated bikeway)** – Provides a right-of-way designated exclusively for bicycle travel adjacent to a roadway and which is separated from vehicular traffic. Types of separation include, but are not limited to, grade separation, flexible posts, inflexible physical barriers, or on-street parking. Refer to California Streets and Highways Code Section 890.4. Refer to Caltrans' Design Information Bulletin Number 89 for design criteria.
- 39. **Clear Storage Distance**—when used in Part 8, the distance available for vehicle storage measured between 6 feet from the rail nearest the intersection to the intersection stop line or the normal stopping point on the highway. At skewed grade crossings and intersections, the 6-foot distance shall be measured perpendicular to the nearest rail either along the center line or edge line of the highway, as appropriate, to obtain the shorter distance. Where exit gates are used, the distance available for vehicle storage is measured from the point where the rear of the vehicle would be clear of the exit gate arm. In cases where the exit gate arm is parallel to the track(s) and is not perpendicular to the highway, the distance is measured either along the center line or edge line of the highway, as appropriate, to obtain the shorter distance.
- 40. **Clear Zone**—the total roadside border area, starting at the edge of the traveled way, that is available for an errant driver to stop or regain control of a vehicle. This area might consist of a shoulder, a recoverable slope, and/or a non-recoverable, traversable slope with a clear run-out area at its toe.
- 41. **Collector Highway**—a term denoting a highway that in rural areas connects small towns and local highways to arterial highways, and in urban areas provides land access and traffic circulation within residential, commercial, and business areas and connects local highways to the arterial highways.
- 42. **Conflict Monitor**—a device used to detect and respond to improper or conflicting signal indications and improper operating voltages in a traffic controller assembly.
- 43. **Constant Warning Time Detection**—a means of detecting rail traffic that provides relatively uniform warning time for the approach of through rail traffic that is not accelerating or decelerating after being detected.
- 43a. **Consulting Engineer** – See Professional Engineer. Refer to California Business and Professions Code Section 6704.
- 44. **Contiguous Lane**—a lane, preferential or otherwise, that is separated from the adjacent lane(s) only by a normal or wide lane line marking.
- 44a. **Contraflow Bicycle Lane** – A contraflow bicycle lane is an area of the roadway designated to allow for the lawful use by bicyclists to travel in the opposite direction from vehicular traffic on a roadway that allows vehicular traffic to travel in only one direction. Also see Class II and Class IV Bikeways.
- 45. **Controller Assembly**—a complete electrical device mounted in a cabinet for controlling the operation of a highway traffic signal.
- 46. **Controller Unit**—that part of a controller assembly that is devoted to the selection and timing of the display of signal indications.
- 47. **Conventional Road**—a street or highway other than an expressway or freeway.
- 47a. **Counter-Flow Bicycle Lane (See Class II and Class IV Bikeways)**
- 48. **Counter-Flow Lane**—a lane operating in a direction opposite to the normal flow of traffic designated for peak direction of travel during at least a portion of the day. Counter-flow lanes are usually separated from the off-peak direction lanes by tubular markers or other flexible channelizing devices, temporary lane separators, or movable or permanent barrier.
- 49. **Crashworthy**—the ability of a roadside safety hardware device or appurtenance to minimize risks to vehicle occupants by allowing a vehicle impacting the appurtenance to be slowed before stopping, redirected, or to continue without significant resistance. Section 1D.11 contains additional information

about crashworthiness.

50. **Crosswalk**—(a) that part of a roadway at an intersection included within the connections of the lateral lines of the sidewalks on opposite sides of the highway measured from the curbs or in the absence of curbs, from the edges of the traversable roadway, and in the absence of a sidewalk on one side of the roadway, the part of a roadway included within the extension of the lateral lines of the sidewalk at right angles to the center line; (b) any portion of a roadway at an intersection or elsewhere distinctly indicated as a pedestrian crossing by pavement marking lines on the surface, which might be supplemented by contrasting pavement texture, style, or color. As per CVC Section 275, "Crosswalk" is either:
 - (a) That portion of a roadway included within the prolongation or connection of the boundary lines of sidewalks at intersections where the intersecting roadways meet at approximately right angles, except the prolongation of such lines from an alley across a street.
 - (b) Any portion of a roadway distinctly indicated for pedestrian crossing by lines or other markings on the surface. Notwithstanding the foregoing provisions of this section, there shall not be a crosswalk where local authorities have placed signs indicating no crossing.
51. **Crosswalk Lines**—white or yellow (in school areas per CVC 21368) pavement marking lines that identify a crosswalk.
52. **Cycle Length**—the time required for one complete sequence of signal indications.
- 52a. **Cycle Track** – See Class IV Bikeway.
53. **Dark Mode**—the lack of all signal indications at a signalized location. The dark mode is most commonly associated with power failures, ramp meters, hybrid beacons, beacons, and some movable bridge signals.
54. **Dedicated Lane**—A lane on a freeway or expressway that provides access to: (a) either an exit lane or the mainline, but not both, at a freeway or expressway exit, or (b) only one roadway at a freeway or expressway split.
55. **Delineator**—a retroreflective device mounted at the side of the roadway in a series to indicate the alignment of the roadway, especially at night or in adverse weather.
- 55a. **Department of Transportation** – California Department of Transportation or Caltrans.
56. **Design Vehicle**—the longest vehicle permitted by statute of the road authority (State or other) on that roadway.
57. **Designated Bicycle Route**—a system of bikeways designated by the jurisdiction having authority with appropriate directional and informational route signs, with or without specific bicycle route numbers.
58. **Detectable**—having a continuous edge within 6 inches of the surface so that pedestrians with vision disabilities can sense its presence and receive usable guidance information.
59. **Detector**—a device used for determining the presence or passage of motor vehicles, (including motorcycles), bicycles, or pedestrians.
60. **Detection Plate**—a smooth continuous plate used on pedestrian channelizing devices to facilitate the use of low-vision canes for pedestrians with vision disabilities. The bottom edge of the detection plate shall be no more than 2 inches above the walkway and the top edge of the detection plate shall be at least 8 inches above the walkway. The detection plate shall share the same vertical plane as the hand trailing edge of the pedestrian channelizing device.
61. **Diagnostic Team**—a group of knowledgeable representatives of the parties of interest in a grade crossing or group of grade crossings (see 23 CFR Part 646.204). The Diagnostic Team includes, at a minimum, representatives of the highway agency or authority with jurisdiction over the roadway, the railroad company and/or transit agency with responsibility for the track and signals, and the California Public Utilities Commission (CPUC).
- 61a. **Divided Highway** – A highway with separated roadbeds for traffic in opposing directions. . Refer to Caltrans' Highway Design Manual Index 62.3.(5)(f).
62. **Downstream**—a term that refers to a location that is encountered by traffic subsequent to an upstream location as it flows in an "upstream to downstream" direction. For example, "the downstream end of a lane line separating the turn lane from a through lane on the approach to an intersection" is the end of the lane line that is closest to the intersection.
63. **Driveway**—an access from a roadway to a building, site, or abutting property. "Private road or driveway" is a way or place in private ownership and used for vehicular travel by the owner and those having express or implied permission from the owner but not by other members of the public. CVC 490.

- 64. **Driving Aisle**—circulation area for motor vehicles within a parking area, typically between rows of parking spaces. Driving aisles provide one-way or two-way travel. Driving aisles are exempted from compliance with MUTCD provisions.
- 65. **Driving Automation System**—technology that automates some or all aspects of the driving task to assist or replace the human vehicle operator. Section 5A.03 contains descriptions of the automation levels.
- 66. **Dropped Lane**—see Lane Drop.
- 67. **Dual-Arrow Signal Section**—a type of signal section designed to include both a yellow arrow and a green arrow.
- 68. **Dynamic Envelope**—the clearance required for light rail transit traffic or a train and its cargo overhang due to any combination of loading, lateral motion, or suspension failure (see Figure 8C-3).
- 69. **Dynamic Exit Gate Operating Mode**—a mode of operation where the exit gate operation is based on the presence of vehicles within the minimum track clearance distance.
- 70. **Dynamic Message Sign**—see Changeable Message Sign.
- 71. **Edge Line Markings**—white or yellow pavement marking lines that delineate the right or left edge(s) of a traveled way.
- 71a. **Electric Bicycle** – Also see Bicycle (CVC 231) and Pedicab (CVC 467.5). As per CVC 312.5(a), An “electric bicycle” is a bicycle equipped with fully operable pedals and an electric motor of less than 750 watts.
 - (a) A “class 1 electric bicycle,” or “low-speed pedal-assisted electric bicycle,” is a bicycle equipped with a motor that provides assistance only when the rider is pedaling, and that ceases to provide assistance when the bicycle reaches the speed of 20 miles per hour.
 - (b) A “class 2 electric bicycle,” or “low-speed throttle-assisted electric bicycle,” is a bicycle equipped with a motor that may be used exclusively to propel the bicycle, and that is not capable of providing assistance when the bicycle reaches the speed of 20 miles per hour.
 - (c) A “class 3 electric bicycle,” or “speed pedal-assisted electric bicycle,” is a bicycle equipped with a motor that provides assistance only when the rider is pedaling, and that ceases to provide assistance when the bicycle reaches the speed of 28 miles per hour and equipped with a speedometer.
- 71b. **Electric Personal Assistive Mobility Device (EPAMD)** – a self-balancing, nontandem two-wheeled device, that is not greater than 20 inches deep and 25 inches wide and can turn in place, designed to transport only one person, with an electric propulsion system averaging less than 750 watts (1 horsepower), the maximum speed of which, when powered solely by a propulsion system on a paved level surface, is no more than 12.5 miles per hour. Refer to CVC 313.
- 71c. **Electrically Motorized Board** – any wheeled device that has a floorboard designed to be stood upon when riding that is not greater than 60 inches deep and 18 inches wide, is designed to transport only one person, and has an electric propulsion system averaging less than 1,000 watts, the maximum speed of which, when powered solely by a propulsion system on a paved level surface, is no more than 20 miles per hour. The device may be designed to also be powered by human propulsion. Refer to CVC 313.5.
- 71d. **Electrical Engineer** – a professional engineer in the branch of electrical engineering and refers to one who practices or offers to practice electrical engineering in any of its phases. Refer to California Business and Professions Code Section 6702.1.
- 72. **Electronic Toll Collection (ETC) Account Only Lane**—a non-attended toll lane that is restricted to use only by vehicles with a registered toll payment account.
- 73. **Emergency-Vehicle Hybrid Beacon**—see Hybrid Beacon.
- 74. **Emergency-Vehicle Traffic Control Signal**—see Highway Traffic Signal.
- 75. **Engineer**—see Professional Engineer.
- 76. **Engineering Judgment**—the evaluation of available pertinent information including, but not limited to, the safety and operational efficiency of all road users, and the application of appropriate principles, experience, education, provisions, and practices as contained in this Manual and other sources, for the purpose of deciding upon the design (see Section 1D.03), use, installation, or operation of a traffic control device. Engineering judgment shall be exercised by a professional engineer (see definition in this Section) with appropriate traffic engineering expertise, or by an individual working under the supervision of such an engineer, through the application of procedures and criteria established by the engineer. Documentation of engineering judgment is not required.

77. **Engineering Study**—the analysis and evaluation of available pertinent information including, but not limited to, the safety and operational efficiency of all road users, and the application of appropriate principles, **engineering judgment, experience, education**, provisions, and practices as contained in this Manual and other sources, for the purpose of deciding upon the design (see Section 1D.03), use, installation, or operation of a traffic control device. An engineering study shall be performed by a professional engineer (see definition in this Section) with appropriate traffic engineering expertise, or by an individual working under the supervision of such an engineer, through the application of procedures and criteria established by the engineer. An engineering study shall be documented in writing.
- 77a. **Engineering and Traffic Survey – Refer to CVC 627.**
78. **Entrance Gate**—an automatic gate that can be lowered across the lanes approaching a grade crossing to block road users from entering the grade crossing.
79. **Exclusive Alignment**—a light rail transit track(s) or a bus rapid transit busway that is grade-separated or protected by a fence or traffic barrier. No grade crossings exist along the track(s) or busway. Motor vehicles, bicycles, and pedestrians are prohibited within the right-of-way. Subways and elevated structures are included within this definition.
80. **Exit Gate**—an automatic gate that can be lowered across the lanes departing a grade crossing to block road users from entering the grade crossing by driving in the opposing traffic lanes.
81. **Exit Gate Clearance Time**—for Four-Quadrant Gate systems at grade crossings, the amount of time provided to delay the descent of the exit gate arm(s) after entrance gate arm(s) begin to descend.
82. **Exit Gate Operating Mode**—for Four-Quadrant Gate systems at grade crossings, the mode of control used to govern the operation of the exit gate arms.
83. **Expressway**—a divided highway with partial control of access. As per CVC 314, an "expressway" is a portion of highway that is part of either of the following: (a) An expressway system established by a county under Section 941.4 of the Streets and Highways Code. (b) An expressway system established by a county before January 1, 1989, as described in subdivision (g) of Section 941.4 of the Streets and Highways Code.
84. **Fail-Safe**—when used in Part 8, a railroad signal design philosophy applied to a system or device such that the result of a hardware failure or the effect of a software error shall either prohibit the system or device from assuming or maintaining an unsafe state or shall cause the system or device to assume a state that is known to be safe.
85. **Flagger**—a person who actively controls the flow of vehicular traffic into and/or through a temporary traffic control zone using hand-signaling devices or an Automated Flagger Assistance Device (AFAD).
86. **Flasher**—a device used to turn highway traffic signal indications on and off at a repetitive rate of approximately once per second.
87. **Flashing**—an operation in which a light source, such as a traffic signal indication or LEDs in a sign, is turned on and off repetitively.
88. **Flashing-Light Signals**—a warning device consisting of two red signal indications arranged horizontally that are activated to flash alternately when rail traffic is approaching or present at a grade crossing.
89. **Flashing Mode**—a mode of operation in which at least one traffic signal indication in each vehicular signal face of a highway traffic signal is turned on and off repetitively.
90. **Four-Quadrant Gate System**—an exit gate system that includes entrance and exit gates that control and block road users on all lanes entering and exiting the grade crossing.
91. **Freeway**—a divided highway with full control of access. As per CVC 332, "Freeway" is a highway in respect to which the owners of abutting lands have no right or easement of access to or from their abutting lands or in respect to which such owners have only limited or restricted right or easement of access.
92. **Full-Actuated**—a type of traffic control signal operation in which all signal phases function on the basis of actuation.
93. **Gate**—an automatically-operated or manually-operated traffic control device that is used to physically obstruct road users such that they are discouraged from proceeding past a particular point on a roadway or pathway, or such that they are discouraged from entering a particular grade crossing, ramp, lane, roadway, or facility.
94. **General-Purpose Lane**—a highway lane or set of lanes, other than a Managed Lane (see definition in this Section) or a Preferential Lane (see definition in this Section), that all or most of the traffic that is allowed

on that highway is also allowed to use. Certain classes of vehicles, such as commercial vehicles or vehicles exceeding a certain weight or size, might be prohibited from using one or more of the general-purpose lanes. A general-purpose lane might also be restricted to certain uses, such as passing or turning or as an auxiliary lane.

95. Gore Area—see Physical Gore and Theoretical Gore.
96. Grade Crossing—the general area where a highway and a railroad and/or light rail transit route cross at the same level, within which are included the tracks, highway, and traffic control devices for traffic traversing that area.
97. Grade Crossing Warning System—the flashing-light signals, with or without automatic gates, together with the necessary control equipment used to inform road users of the approach or presence of rail traffic at a grade crossing.
98. Guide Sign—a sign that shows route designations, highway names, destinations, directions, distances, services, points of interest, or other geographical, recreational, or cultural information.
99. High-Occupancy Vehicle (HOV)—a motor vehicle carrying at least two (or more than two if the signs for a specific roadway indicate a higher minimum occupancy requirement) persons, including carpools, vanpools, and buses.
100. Highway—a general term for denoting a public way for purposes of travel by vehicles and vulnerable road users, including the entire area within the right-of-way. As per CVC 360, "Highway" is a way or place of whatever nature, publicly maintained and open to the use of the public for purposes of vehicular travel. Highway includes street. Also, refer to CVC 590 definition of "Street".
101. Highway-Light Rail Transit Grade Crossing—the general area where a highway and a light rail transit route cross at the same level, within which are included the light rail transit tracks, highway, and traffic control devices for traffic traversing that area.
102. Highway-Rail Grade Crossing—the general area where a highway and a railroad cross at the same level, within which are included the railroad tracks, highway, and traffic control devices for highway traffic traversing that area.
103. Highway Traffic Signal—a power-operated traffic control device by which traffic is warned or directed to take some specific action. These devices do not include power-operated signs (except as provided in Chapters 4S and 4T), steadily-illuminated raised pavement markers, gates, flashing-light signals (see Section 8D.02), warning lights (see Section 6L.07), or steady-burning electric lamps. Highway traffic signals include:
 - (a) Flashing Beacon—see Beacon.
 - (b) In-Roadway Warning Lights—a special type of highway traffic signal installed in the roadway surface to warn road users that they are approaching a condition on or adjacent to the roadway that might not be readily apparent and might require the road users to reduce speed and/or come to a stop.
 - (c) Lane-Use Control Signal—a signal face or comparable display on a full-matrix Changeable Message Sign (see Chapters 2L and 4T) displaying indications to permit or prohibit the use of specific lanes of a roadway or a shoulder where driving is sometimes permitted, or to indicate the impending prohibition of such use.
 - (d) Traffic Control Signal (Traffic Signal)—a highway traffic signal placed at intersections, movable bridges, fire stations, midblock crosswalks, alternating one-way sections of a single lane road, private driveways, or other locations that require conflicting traffic to be directed to stop and permitted to proceed in an orderly manner. These devices do not include pedestrian hybrid beacons (see Chapter 4J) or emergency-vehicle hybrid beacons (see Chapter 4N). Traffic control signals include vehicular signal indications, pedestrian signal indications, and bicycle symbol signal indications. Special traffic control signals include:
 1. Emergency-Vehicle Traffic Control Signal—a traffic control signal that directs all conflicting traffic to stop in order to permit the driver of an authorized emergency vehicle to proceed into the roadway or intersection.
 2. Movable Bridge Traffic Control Signal—a traffic control signal installed at a movable bridge to notify traffic to stop during periods when the roadway is closed to allow the bridge to open.

3. **Portable Traffic Control Signal**—a temporary component of a traffic control signal on a mobile support with one or more signal faces that is designed so that it can be easily transported, deployed, or relocated as part of a temporary traffic control signal, or during construction and maintenance as a temporary part of a permanent traffic control signal installation.
4. **Pre-Signal**—traffic control signal faces that are located upstream from a signalized intersection and are operated in conjunction with the traffic control signal faces at the downstream signalized intersection in a manner that is designed to keep the area between the stop line for the upstream traffic control signal faces and the stop line for the downstream signalized intersection clear of queued vehicles. When used in conjunction with a grade crossing, the pre-signal is operated for the purpose of preventing vehicles from queuing within the minimum track clearance distance. Supplemental near-side traffic control signal faces for the downstream signalized intersection are not considered to be pre-signals.
5. **Queue Cutter Signal**—an independently-controlled traffic control signal (not operated in conjunction with the traffic control signal faces at a downstream signalized intersection) located at a grade crossing that controls traffic in one direction only on the roadway for the purpose of keeping the minimum track clearance distance clear of vehicles. The display of red signal indications is activated from a downstream queue detection system, by time of day, by approaching rail traffic, by an approaching bus on a busway, or by a combination of any of these methods.
6. **Ramp Control Signal**—a traffic control signal installed to control the merging flow of traffic onto a freeway at an entrance ramp or at a freeway-to-freeway ramp connection.
7. **Temporary Traffic Control Signal**—a traffic control signal that is installed for a limited time period using fixed or portable traffic control signal units.
104. **HOV Lane**—any preferential lane designated for exclusive use by high-occupancy vehicles for all or part of a day—including a designated lane on a freeway, other highway, street, or independent roadway on a separate right-of-way.
105. **Hybrid Beacon**—a special type of beacon that is intentionally placed in a dark mode (no indications displayed) between periods of operation and, when operated, displays both steady and flashing traffic control signal indications. Hybrid beacons include:
 - (a) **Emergency-Vehicle Hybrid Beacon**—used to warn and control traffic at an unsignalized location to assist authorized emergency vehicles in entering or crossing a street or highway. Refer to CVC 21355
 - (b) **Pedestrian Hybrid Beacon**—used to warn and control traffic at an unsignalized location to assist pedestrians in crossing a street or highway at a marked crosswalk.
106. **Identification Marker**—a shape, color, and/or pictograph that is used as a visual identifier for a destination guide signing system of a community wayfinding system or a shared-use path system for an area.
107. **Inherently Low Emission Vehicle (ILEV)**—any kind of vehicle that, because of inherent properties of the fuel system design, will not have significant evaporative emissions, even if its evaporative emission control system has failed.
108. **In-Roadway Warning Lights**—see Highway Traffic Signal.
109. **Interchange**—a system of interconnecting roadways providing for traffic movement between two or more highways that do not intersect at grade.
110. **Interchange Lane Drop**—see Lane Drop.
111. **Preemption Interconnection**—the electrical connection between the railroad or light rail transit active warning system and the highway traffic signal controller assembly for the purpose of preemption.
112. **Intermediate Interchange**—an interchange with an urban or rural route that is not a major or minor interchange as defined in this Section.
113. **Intersection**—intersection is defined as follows: As per CVC 365, an "intersection" is the area embraced within the prolongation of the lateral curb lines, or, if none, then the lateral boundary lines of the roadways, of two highways which join one another at approximately right angles or the area within which vehicles traveling upon different highways joining at any other angle may come in conflict.
 - (a) The area embraced within the prolongation or connection of the lateral curb lines, or if none, the

lateral boundary lines of the roadways of two highways that join one another at, or approximately at, right angles, or the area within which vehicles traveling on different highways that join at any other angle might come into conflict.

- (b) The junction of an alley, driveway, or site roadway with a public roadway or highway shall not constitute an intersection, unless the public roadway or highway at said junction is controlled by a traffic control device.
- (c) If a highway includes two roadways separated by a median, then every crossing of each roadway of such divided highway by an intersecting highway shall be a separate intersection if the opposing left-turn paths cross and there is sufficient interior storage for the design vehicle (see Figure 2A-5).
- (d) At a location controlled by a traffic control signal, regardless of the distance between the separate intersections as defined in (c) above:
 - 1. If a stop line, yield line, or crosswalk has not been designated on the roadway (within the median) between the separate intersections, the two intersections and the roadway (median) between them shall be considered as one intersection;
 - 2. Where a stop line, yield line, or crosswalk is designated on the roadway on the intersection approach, the area within the crosswalk and/or beyond the designated stop line or yield line shall be part of the intersection; and
 - 3. Where a crosswalk is designated on a roadway on the departure from the intersection, the intersection shall include the area extending to the far side of such crosswalk.
- 114. Intersection Control Beacon—see Beacon.
- 115. Interval—the part of a signal cycle during which signal indications do not change.
- 116. Island—a defined area between traffic lanes for control of vehicular movements, for toll collection, or for pedestrian or bicyclist refuge. It includes all end protection and approach treatments. Within an intersection area, a median or an outer separation is considered to be an island.
- 117. Jughandle Turn—a left-turn or U-turn that, in conjunction with special geometry, is made by initially making a right-turn or diverging to the right. With other special geometry, a right-turn or U-turn makes a jughandle turn by initially making a left-turn or diverging to the left.
- 118. Lane Drop—a through lane that becomes a mandatory turn lane on a conventional roadway, or a through lane that becomes a mandatory exit lane on a freeway or expressway. The end of an acceleration lane and reductions in the number of through lanes that do not involve a mandatory turn or exit are not considered lane drops.
- 119. Lane Line Markings—white pavement marking lines that delineate the separation of traffic lanes that have the same direction of travel on a roadway.
- 120. Lane Reduction—elimination of a through lane by a gradual narrowing of the travel pavement (taper) through physical construction or pavement markings at which traffic in the lane being eliminated must merge into the adjacent through lane and continue in the same direction of travel. A lane reduction can occur outside the influence of an intersection or interchange, or within an interchange a short distance downstream of the gore of an exit ramp. Through lanes that become a mandatory turn or exit are considered lane drops rather than lane reductions.
- 121. Lane-Use Control Signal—see Highway Traffic Signal.
- 122. Legend—see Sign Legend.
- 123. Lens—see Signal Lens.
- 124. Light Rail Transit Traffic (Light Rail Transit Equipment)—every device in, upon, or by which any person or property can be transported on light rail transit tracks, including single-unit light rail transit cars (such as streetcars and trolleys) and assemblies of multiple light rail transit cars coupled together.
- 124a. Limit Line - A "limit line" is a solid white line not less than 12 nor more than 24 inches wide, extending across a roadway or any portion thereof to indicate the point at which traffic is required to stop in compliance with legal requirements. Refer to CVC 377.
- 124b. Limit Line Detection Zone – a Referenced Bicycle-Rider must be detected in a 6 x 6 feet area immediately behind the limit line, centered either in a normal width lane or if the lane is more than 12 feet wide, centered 6 feet from the left lane line. For a lane of 20 feet or greater, two minimum 6 x 6 feet areas shall constitute the Limit Line Detection Zone.

- 125. **Loading Zone**—a specially marked, signed or designated area for the loading or unloading of vehicles (passenger or freight).
- 126. **Locomotive Horn**—an air horn, steam whistle, or similar audible warning device (see 49 CFR Part 229.129) mounted on a locomotive or control cab car. The terms “locomotive horn,” “train whistle,” “locomotive whistle,” and “train horn” are used interchangeably in the railroad industry.
- 127. **Logo**—a distinctive emblem or trademark that identifies a commercial or non-commercial business, program, or organization.
- 128. **Longitudinal Markings**—pavement markings that are generally placed parallel and adjacent to the flow of traffic such as lane lines, center lines, edge lines, channelizing lines, and others.
- 129. **Louver**—see Signal Louver.
- 130. **Low-Volume Rural Road**—A category of paved or unpaved conventional or special-purpose roadways having an AADT of less than 400 vehicles and lying outside of built-up or urbanized areas of cities, towns, and communities.
- 131. **Major Interchange**—an interchange with another freeway or expressway, or an interchange with a high-volume multi-lane highway, principal urban arterial, or major rural route where the interchanging traffic is heavy or includes many road users unfamiliar with the area.
- 132. **Major Street**—the street normally carrying the higher volume of vehicular traffic.
- 133. **Malfunction Management Unit**—see Conflict Monitor.
- 134. **Managed Lane**—a highway lane or set of lanes, or a highway facility, for which variable operational strategies such as direction of travel, tolling, pricing, and/or vehicle type or occupancy requirements are implemented and managed in real-time in response to changing conditions. Managed lanes are typically buffer-separated or barrier-separated lanes parallel to the general-purpose lanes of a highway in which access is restricted to designated locations. There are also some highways on which all lanes are managed.
- 135. **Manual Lane**—see Attended Lane within the definition of Toll Collection.
- 135a. **Markings** – All lines, words, or symbols, except signs, officially placed within the roadway to regulate, warn or guide traffic.
- 136. **Maximum Highway Traffic Signal Preemption Time**—the maximum amount of time needed following initiation of the preemption sequence for the highway traffic signals to complete the timing of the right-of-way transfer time, queue clearance time, and separation time.
- 137. **Median**—the portion of a highway separating opposing directions of the traveled way or the area between two roadways of a divided highway measured from edge of traveled way to edge of traveled way. The median excludes turn lanes. The median width might be different between intersections, interchanges, and at opposite approaches of the same intersection.
- 138. **Minimum Track Clearance Distance**—the length along a highway over the track(s) where a vehicle could be struck by rail traffic. The minimum track clearance distance is measured from a point upstream from the track(s) on the approach to the grade crossing to a point downstream from the track(s) on the departure from the grade crossing. The length along the highway between the two points is the minimum track clearance distance. (See Section 8A.07).
- 139. **Minor Interchange**—an interchange where traffic is local and very light, such as interchanges with land service access roads. Where the sum of the exit volumes is estimated to be lower than 100 vehicles per day in the design year, the interchange is classified as local.
- 140. **Minor Street**—the street normally carrying the lower volume of vehicular traffic.
- 141. **Mixed-Use Alignment**—a light rail transit track(s), a busway, or a bus only lane(s) where the light rail transit (LRT) or bus rapid transit (BRT) vehicles operate in mixed traffic with all types of road users. This includes streets, transit malls, and pedestrian malls where the right-of-way is shared. In a mixed-use alignment, the light rail transit or the bus rapid transit traffic does not have the right-of-way over other road users at grade crossings and intersections. If the LRT traffic or buses are controlled by traffic control signals or LRT signal faces at an intersection with a roadway, the alignment is considered to be mixed-use even if some of the approaches to the intersection are used exclusively by LRT traffic or buses.
- 141a. **Motorcycle** - a motor vehicle having a seat or saddle for the use of the rider, designed to travel on not more than three wheels in contact with the ground. Refer to CVC 400.
- 141b. **Motor-driven Cycle** - any motorcycle with a motor that displaces less than 150 cubic centimeters. A motor-driven

cycle does not include a motorized bicycle. Refer to CVC 405.

- 141c. **Motorized Bicycle** - or “moped” is a two-wheeled or three-wheeled device having fully operative pedals for propulsion by human power or having no pedals if powered solely by electrical energy, and an automatic transmission and a motor that produces less than 4 gross brake horsepower and is capable of propelling the device at a maximum speed of not more than 30 miles per hour on level ground. Refer to CVC 406.
- 141d. **Motorized Quadricycle** - a four-wheeled device, and a “motorized tricycle” is a three-wheeled device, designed to carry not more than two persons, including the driver, and having either an electric motor or a motor with an automatic transmission developing less than two gross brake horsepower and capable of propelling the device at a maximum speed of not more than 30 miles per hour on level ground. The device shall be utilized only by a person who by reason of physical disability is otherwise unable to move about as a pedestrian or by a senior citizen. Refer to CVC 407.
- 141e. **Motorized Scooter** -any two-wheeled device that has handlebars, has either a floorboard that is designed to be stood upon when riding or a seat and footrests in place of the floorboard, and is powered by an electric motor. This device may also be designed to be powered by human propulsion. Refer to CVC 407.5.
- 142. **Movable Bridge Resistance Gate**—a type of traffic gate, which is located downstream of the movable bridge warning gate, that provides a physical deterrent to vehicle and/or pedestrian traffic when placed in the appropriate position.
- 143. **Movable Bridge Signal**—see Highway Traffic Signal.
- 144. **Movable Bridge Warning Gate**—a type of traffic gate designed to warn, but not primarily to block, vehicle and/or pedestrian traffic when placed in the appropriate position.
- 145. **Multi-Lane**—more than one lane moving in the same direction. A multi-lane street, highway, or roadway has a basic cross-section comprised of two or more through lanes in one or both directions. A multi-lane approach has two or more lanes moving toward the intersection, including turning lanes.
- 146. **Neutral Area**—the paved area between the channelizing lines separating an entrance or exit ramp or a channelized turn lane or channelized entering lane from the adjacent through lane(s).
- 146a. **Night or Nighttime** – is equivalent of “darkness” defined by CVC Section 280: “Darkness” is any time from one-half hour after sunset to one-half hour before sunrise and any other time when visibility is not sufficient to render clearly discernible any person or vehicle on the highway at a distance of 1000 feet.
- 146b. **Non-motorized Traffic** – Bicycle and pedestrian component of traffic.
- 147. **Object Marker**—a device used to mark obstructions within or adjacent to the roadway.
- 148. **Occupancy Requirement**—any restriction that regulates the use of a facility or one or more lanes of a facility for any period of the day based on a specified minimum number of persons in a vehicle.
- 149. **Occupant**—a person driving or riding in a car, truck, bus, or other vehicle.
- 150. **On-Street Parking**—parking within or along, and accessed directly from, a public roadway or a site roadway open to public travel.
- 151. **Open-Road ETC Lane**—a non-attended lane that is designed to allow toll payments to be electronically collected from vehicles traveling at normal highway speeds. Open-Road ETC lanes are typically physically separated from the toll plaza, often following the alignment of the mainline lanes, with toll plaza lanes for cash toll payments being on a different alignment after diverging from the mainline lanes or a subset thereof.
- 152. **Open-Road Tolling Point**—the location along an Open-Road ETC lane at which roadside or overhead detection and receiving equipment are placed and vehicles are electronically assessed a toll.
- 153. **Opposing Traffic**—vehicles that are traveling in the opposite direction. At an intersection, vehicles entering from an approach that is approximately straight ahead would be considered to be opposing traffic, but vehicles entering from approaches on the left or right would be considered to be conflicting traffic rather than opposing traffic.
- 154. **Option Lane**—A lane on a freeway, expressway, or conventional road multi-lane exit or multi-lane split that widens on the approach to allow access, without changing lanes, to:
 - (a) Both an exit lane and the mainline at a freeway or expressway exit; or
 - (b) Both diverging roadways at a freeway, expressway, or conventional road split.
- 155. **Overhead Sign**—a sign that is placed such that a portion or the entirety of the sign or its support is directly above the roadway or shoulder such that vehicles travel below it. Typical installations include

signs placed on cantilever arms that extend over the roadway or shoulder, signs placed on sign support structures that span the entire width of the pavement, signs placed on mast arms or span wires either independently or that also support traffic control signals, and signs placed on highway bridges that cross over the roadway.

- 155a. **Park or Parking** - standing of a vehicle, whether occupied or not, otherwise than temporarily for the purpose of and while actually engaged in loading or unloading merchandise or passengers. Refer to CVC 463.
156. **Parking Area**—a parking lot or parking garage that is separated from a roadway. Parallel, perpendicular, or angle parking spaces along a roadway are not considered a parking area.
157. **Parking Space**—an area marked or designated for storage of a vehicle while the driver is not present.
158. **Preemption Clearance Interval**—the part of a traffic signal sequence displayed as a result of a preemption request when vehicles are provided the opportunity to clear the railroad or light rail transit tracks, or a movable bridge, prior to the arrival of the train or boat for which the traffic signal is being preempted.
159. **Preemption Time Variability**—the result that occurs when the traffic signal controller enters the Preemption Clearance Interval with less than the maximum design Right-of-Way Transfer Time or the speed of a train approaching the grade crossing varies.
160. **Passive Grade Crossing**—a grade crossing where none of the automatic traffic control devices associated with an Active Grade Crossing Warning System are present and at which the traffic control devices consist entirely of signs and/or markings.
161. **Pathway**—a general term denoting a public way for purposes of travel by authorized users outside the traveled way and physically separated from the roadway by an open space or barrier and either within the highway right-of-way or within an independent alignment. Pathways include shared-use paths, but do not include sidewalks.
162. **Pathway Grade Crossing**—the general area where a pathway and railroad and/or light rail transit tracks cross at the same level, within which are included the tracks, pathway, and traffic control devices for pathway traffic traversing that area.
163. **Paved**—having a roadway surface that has both a structural (weight bearing) and a sealing purpose for the roadway, such as a bituminous surface treatment, mixed bituminous concrete, or Portland cement concrete.
164. **Pedestrian**—a person on foot, in a wheelchair, on other devices determined by local law to be equivalent, which might include skates or a skateboard. As per CVC 467,
- (a) A "pedestrian" is a person who is afoot or who is using any of the following:
1. A means of conveyance propelled by human power other than a bicycle.
 2. An electric personal assistive mobility device.
- (b) "Pedestrian" includes a person who is operating a self-propelled wheelchair, motorized tricycle, or motorized quadricycle and, by reason of physical disability, is otherwise unable to move about as a pedestrian, as specified in subdivision(a).
165. **Pedestrian Change Interval**—an interval during which the flashing UPRAISED HAND (symbolizing DONT WALK) signal indication is displayed.
166. **Pedestrian Clearance Time**—the time provided for a pedestrian crossing in a crosswalk, after leaving the curb or edge of pavement, to travel to the far side of the traveled way or to a median.
167. **Pedestrian Facility**—a general term denoting a location where improvements and provisions have been made to accommodate or encourage pedestrian activity.
168. **Pedestrian Hybrid Beacon**—see Hybrid Beacon.
169. **Pedestrian Signal Head**—a signal head, which contains the symbols WALKING PERSON (symbolizing WALK) and UPRAISED HAND (symbolizing DONT WALK), that is installed to direct pedestrians at a traffic control signal.
- 169a. **Pedicab** – Also see Bicycle (CVC 231) and Electric Bicycle (CVC 312.5). As per CVC Section 467.5, "Pedicab" means any of the following:
- (a) A bicycle, including an electric bicycle, that has three or more wheels, that transports, or is capable of transporting, passengers on seats attached to the bicycle, that is operated by a person, and that is being used for transporting passengers for hire.
- (b) A bicycle, including an electric bicycle, that pulls a trailer, sidecar, or similar device, that transports, or is

capable of transporting, passengers on seats attached to the trailer, sidecar, or similar device, that is operated by a person, and that is being used for transporting passengers for hire.

- (c) A four-wheeled device that is primarily or exclusively pedal-powered, has a seating capacity for eight or more passengers, cannot travel in excess of 15 miles per hour, and is being used for transporting passengers for hire.

170. **Permissive Mode**—a mode of traffic control signal operation in which left or right turns are permitted to be made after yielding to pedestrians, if any, and/or opposing traffic, if any. When a CIRCULAR GREEN signal indication is displayed, both left and right turns are permitted unless otherwise prohibited by another traffic control device. When a flashing YELLOW ARROW or flashing RED ARROW signal indication is displayed, the turn indicated by the arrow is permitted.
171. **Physical Gore**—a longitudinal point where a physical barrier or the lack of a paved surface inhibits road users from crossing from a ramp or channelized turn lane or channelized entering lane to the adjacent through lane(s) or vice versa.
172. **Pictograph**—a pictorial representation used to identify a governmental jurisdiction, an area of jurisdiction, a governmental or other public transportation agency or provider, a military base or branch of service, a governmental-approved university or college, a governmental-approved institution, or a toll payment system.
173. **Plaque**—a traffic control device intended to communicate specific information to road users through a word, symbol, or arrow legend that is placed immediately adjacent to a sign to supplement the message on the sign. The difference between a plaque and a sign is that a plaque cannot be used alone. The designation for a plaque includes a “P” suffix.
174. **Platoon**—a group of vehicles or pedestrians traveling together as a group, either voluntarily or involuntarily, because of traffic signal controls, geometrics, or other factors.
- 174a. **Pocket bike** – As per CVC 473, a two-wheeled motorized device that has a seat or saddle for the use of the rider, and that is not designed or manufactured for highway use. “Pocket bike” does not include an off-highway motorcycle, as defined in CVC 436.
175. **Portable Traffic Control Signal**—see Highway Traffic Signal.
176. **Post-Exit Ramp Lane Reduction**—see Lane Reduction.
177. **Post-Mounted Sign**—a sign that is placed to the side of the roadway such that no portion of the sign or its support is directly above the roadway or shoulder.
178. **Posted Speed Limit**—a speed limit determined by law or regulation and displayed on Speed Limit signs.
179. **Preemption**—the transfer of normal operation of a traffic control signal or a hybrid beacon to a special control mode of operation.
180. **Preferential Lane**—a highway lane or set of lanes, or a highway facility, reserved for the exclusive use of one or more specific types of vehicles or of vehicles with a specific minimum number of occupants.
181. **Pre-Signal**—see Highway Traffic Signal.
182. **Pretimed Operation**—a type of traffic control signal operation in which none of the signal phases function on the basis of actuation.
183. **Primary Signal Face**—one of the required or recommended minimum number of signal faces for a given approach or separate turning movement, but not including near-side signal faces required as a result of the far-side signal faces exceeding the maximum distance from the stop line.
184. **Principal Legend**—place names, street names, and route numbers displayed on guide signs.
185. **Priority Control**—a means by which the assignment of right-of-way is obtained or modified.
186. **Private Road**—see Site Roadways Open to Public Travel. Refer to CVC 490.
187. **Professional Engineer (P.E.)**—An individual who has fulfilled education and experience requirements and passed examinations that, under State licensure laws, permit the individual to offer engineering services within areas of expertise directly to the public. Refer to California Business and Professions Code Section 6704.
- (a) **Engineer** – a person registered under California Professional Engineers Act as a professional engineer, including any of the branches thereof. Refer to California Business and Professions Code Section 6706.
- (b) **Professional Engineer** - a person engaged in the professional practice of rendering service or creative work requiring education, training and experience in engineering sciences and the application of special

knowledge of the mathematical, physical and engineering sciences in such professional or creative work as consultation, investigation, evaluation, planning or design of public or private utilities, structures, machines, processes, circuits, buildings, equipment or projects, and supervision of construction for the purpose of securing compliance with specifications and design for any such work. Refer to California Business and Professions Code Section 6701.

188. Protected Mode—a mode of traffic control signal operation in which left or right turns are permitted to be made only when a left or right GREEN ARROW signal indication is displayed.
189. Public Road—any road, street, or similar facility under the jurisdiction of and maintained by a public agency and open to public travel. (see definition of Site Roadways Open to Public Travel).
190. Push Button—a button to activate a device or signal timing for pedestrians, bicyclists, or other road users.
191. Push Button Information Message—a recorded message that can be actuated by pressing a push button when the walk interval is not timing and that provides the name of the street that the crosswalk associated with that particular push button crosses and can also provide other information about the intersection signalization or geometry.
192. Push Button Locator Tone—a repeating sound that informs approaching pedestrians that a push button exists to actuate pedestrian timing or receive additional information and that enables pedestrians with vision disabilities to locate the push button.
193. Queue Clearance Time—when used in Part 8, the time required for the design vehicle of maximum length stopped just inside the minimum track clearance distance to start up and move through and clear the entire minimum track clearance distance.
194. Queue Cutter Signal—see Highway Traffic Signal.
195. Quiet Zone—a segment of a rail line, within which is situated one or a number of consecutive public highway-rail grade crossings at which locomotive horns are not routinely sounded per 49 CFR Part 222.
196. Rail Traffic—every device in, upon, or by which any person or property can be transported on rails or tracks and to which all other traffic must yield the right-of-way by law at grade crossings, including trains, one or more locomotives coupled (with or without cars), other railroad equipment, and light rail transit operating in exclusive or semi-exclusive alignments. Light rail transit operating in a mixed-use alignment, to which other traffic is not required to yield the right-of-way by law, is a vehicle and is not considered to be rail traffic.
197. Raised Pavement Marker—a device mounted on or in a road surface that has a height generally not exceeding approximately 1 inch above the road surface for a permanent marker, or not exceeding approximately 2 inches above the road surface for a temporary flexible marker, and that is intended to be used as a positioning guide and/or to supplement or substitute for pavement markings. Raised pavement markers might also be recessed into or flush with the pavement surface.
198. Ramp Control Signal (Ramp Meter)—see Highway Traffic Signal.
199. Red Clearance Interval—an interval that follows a yellow change interval and precedes the next conflicting green interval.
- 199a. Reference Bicycle-Rider – a minimum 4 feet tall person, weighing minimum 90 lb, riding on an unmodified minimum 16 inch wheel bicycle with non-ferromagnetic frame, non-ferromagnetic fork and cranks, aluminum rims, stainless steel spokes, and headlight.
- 199b. Registered Engineer – See Professional Engineer.
200. Regulatory Sign—a sign that gives notice to road users of traffic laws or regulations.
- 200a. Resident District -As per CVC 515, a portion of a highway and the property contiguous thereto, other than a business district,
 - (a) upon one side of which highway, within a distance of a quarter of a mile, the contiguous property fronting thereon is occupied by 13 or more separate dwelling houses or business structures, or
 - (b) upon both sides of which highway, collectively, within a distance of a quarter of a mile, the contiguous property fronting thereon is occupied by 16 or more separate dwelling houses or business structures.A residence district may be longer than one-quarter of a mile if the above ratio of separate dwelling houses or business structures to the length of the highway exists. Refer to CVC Sections 235 and 240, to determine whether a highway is within a business or residence district.
201. Retroreflectivity—a property of a surface that allows a large portion of the light coming from a point

source to be returned directly back to a point near its origin.

- 202. Road—see Roadway.
- 203. Road User—a vehicle operator, bicyclist, or pedestrian, including persons with disabilities, within the highway or on a site roadway open to public travel. (see definition of Site Roadways Open to Public Travel)
- 204. Roadway—that portion of a highway improved, designed, or ordinarily used for vehicular travel and parking lanes, but exclusive of the sidewalk, berm, or shoulder even though such sidewalk, berm, or shoulder is used by persons riding bicycles or other human-powered vehicles. In the event a highway includes two or more separate roadways, the term roadway as used in this Manual shall refer to any such roadway separately, but not to all such roadways collectively. Refer to CVC 527 and 530.
- 205. Roadway Network—a geographical arrangement of intersecting roadways.
- 206. Roundabout—a circular intersection with yield control at entry, which permits a vehicle on the circulatory roadway to proceed, and with deflection of the approaching vehicle counter-clockwise around a central island.
- 207. Rumble Strip—a series of intermittent, narrow, transverse areas of rough-textured, slightly raised, or depressed road surface that extend across the travel lane to alert vehicle operators to unusual traffic conditions or are located along the shoulder, along the roadway center line, or within islands formed by pavement markings to alert road users that they are leaving the travel lanes.
- 208. Rural Highway—a type of roadway normally characterized by lower volumes, higher speeds, fewer turning conflicts, and less conflict with pedestrians.
- 209. Scanning Graphic—a graphic designed for scanning by machine, and includes bar codes, quick-response (QR) codes or other matrix bar code formats, or similar graphics.
- 209a. Scenic Highway – An officially designated portion of the State Highway System traversing areas of outstanding scenic beauty which together with the adjacent scenic corridors requires special scenic conservation treatment.
- 210. School—a public or private educational institution recognized by the State education authority for one or more grades K through 12 or as otherwise defined by the State. A “private school” is any school, whether conducted for profit or not, giving a course of training similar to that given in a public school at or below the twelfth grade, including but not limited to schools owned or operated by any church. Refer to CVC 492.
- 211. School Zone—a designated roadway segment approaching, adjacent to, and beyond school buildings or grounds, or along which school related activities occur. As per CVC 22352(a)(2)(B) When approaching or passing a school building or the grounds thereof, contiguous to a highway and posted with a standard "SCHOOL" warning sign, while children are going to or leaving the school either during school hours or during the noon recess period. The prima facie limit shall also apply when approaching or passing any school grounds which are not separated from the highway by a fence, gate, or other physical barrier while the grounds are in use by children and the highway is posted with a standard "SCHOOL" warning sign.
- 212. Semi-Actuated—a type of traffic control signal operation in which at least one, but not all, signal phases function on the basis of actuation.
- 213. Semi-Exclusive Alignment—a light rail transit track(s) or a bus rapid transit busway that is in a separate right-of-way or that is along a street or railroad right-of-way where motor vehicles, bicycles, and pedestrians have limited access and cross only at designated locations, such as at grade crossings where road users must yield the right-of-way to the light rail transit or the bus rapid transit traffic.
- 213a. Separated Bicycle Lane - See Class II or Class IV Bikeway.
- 214. Separate Turn Signal Face—a signal face that exclusively controls a turn movement and that displays signal indications that are applicable only to the turn movement.
- 215. Separation Time—the component of maximum highway traffic signal preemption time during which the minimum track clearance distance is clear of vehicular traffic prior to the arrival of rail traffic.
- 216. Serviceable—a condition in which a traffic control device appears (day and night) and operates as intended, beyond which it requires replacement due to damage or wear. Whether a device is serviceable will depend on the type of device under consideration. In general, if the device is capable of being serviced with minimal effort or replacement parts so that it continues to appear and operate as intended, and the device is otherwise substantially intact, then it can be considered to be in serviceable condition. If the device is damaged or not operational beyond reasonable repair, then it is likely no longer serviceable.
- 217. Shared Roadway—a roadway that is officially designated and marked as a bicycle route, but which is

open to motor vehicle travel and upon which no bicycle lane is designated. **Shared Roadway (No Bikeway Designation)** – A roadway that permits bicycle use but is not officially designated as a bikeway.

- 218. **Shared Turn Signal Face**—a signal face, for controlling both a turn movement and the adjacent through movement, that always displays the same color of circular signal indication that the adjacent through signal face or faces display.
- 219. **Shared-Use Path (Class I Bikeway)** —a bikeway outside the traveled way and physically separated from motorized vehicular traffic by an open space or barrier and either within the highway right-of-way or within an independent alignment. Shared-use paths are also used by pedestrians (including skaters, users of manual and motorized wheelchairs, and joggers) and other authorized motorized and non-motorized users. Refer to the Caltrans' Highway Design Manual Index 1003.1 for design criteria.
- 220. **Shoulder**—a longitudinal area contiguous with the traveled way that is used for accommodation of stopped vehicles for emergency use and for lateral support of base and surface courses, and that is graded for emergency stopping. A shoulder might be paved or unpaved. A paved shoulder might be opened to part-time travel by some or all vehicles and might also be available for use by pedestrians and/or bicycles in the absence of other pedestrian or bicycle facilities. The portion of the highway contiguous with the roadway for accommodations of pedestrians, bicyclists, stopped vehicles, for emergency use, and for lateral support of base and surface courses. Refer to the Caltrans' Highway Design Manual Index 62.1.(9).
- 221. **Sidewalk**—that portion of a street between the curb line, or the lateral line of a roadway, and the adjacent property line or on easements of private property that is paved or improved and intended for use by pedestrians. As per CVC 555, "Sidewalk" is that portion of a highway, other than the roadway, set apart by curbs, barriers, markings or other delineation for pedestrian travel.
- 222. **Sidewalk Extension**—a pedestrian facility at an intersection or midblock crosswalk which extends the sidewalk by physically and visually narrowing the roadway.
- 223. **Sidewalk Grade Crossing**—the portion of a highway-rail grade crossing or of a highway-light rail transit grade crossing where a sidewalk and railroad tracks or a sidewalk and light rail transit tracks cross at the same level, within which are included the tracks, sidewalk, and traffic control devices for sidewalk users traversing that area.
- 224. **Sign**—with regard to controlling traffic, any traffic control device that is intended to communicate specific information to road users through a word, symbol, and/or arrow legend. Signs do not include highway traffic signals, pavement markings, delineators, or channelization devices. Signs whose purpose is unrelated to traffic control are addressed in Section 1A.02.
- 225. **Sign Assembly**—a group of signs, located on the same support(s), that supplement one another in conveying information to road users.
- 226. **Sign Illumination**—either internal or external lighting that shows similar color by day or night. Street or highway lighting shall not be considered as meeting this definition.
- 227. **Sign Legend**—all word messages, logos, pictographs, and symbol and arrow designs that are intended to convey specific meanings. The border, if any, on a sign is not considered to be a part of the legend.
- 228. **Sign Panel**—a separate panel or piece of material containing a word, logo, pictograph, symbol, and/or arrow legend that is affixed to the face of a sign.
- 229. **Signal**—See Highway Traffic Signal.
- 230. **Signal Backplate**—a thin strip of material that extends outward from and parallel to a signal face on all sides of a signal housing to provide a background for improved visibility of the signal indications.
- 231. **Signal Coordination**—the establishment of timed relationships between adjacent traffic control signals.
- 232. **Signal Dimming**—a reduction of the light output from a signal indication, hybrid beacon, or rectangular rapid-flashing beacon indication, typically for nighttime conditions, to a value that is below the minimum specified intensity for daytime conditions. If a variety of intensity levels are used during daytime conditions and all of the various levels (including the lowest of the intensities) are above the minimum specified intensity for daytime conditions, this would not be considered to be signal dimming.
- 233. **Signal Face**—an assembly of one or more signal sections that is provided for controlling one or more traffic movements on a single approach.
- 234. **Signal Head**—an assembly of one or more signal faces that is provided for controlling traffic movements on one or more approaches.

- 235. **Signal Housing**—that part of a signal section that protects the light source and other required components.
- 236. **Signal Indication**—the illumination of a signal lens or equivalent device.
- 237. **Signal Lens**—that part of the signal section that redirects the light coming directly from the light source and its reflector, if any.
- 238. **Signal Louver**—a device that can be mounted inside a signal visor to restrict visibility of a signal indication from the side or to limit the visibility of the signal indication to a certain lane or lanes, or to a certain distance from the stop line.
- 239. **Signal Phase**—the right-of-way, yellow change, and red clearance intervals in a cycle that are assigned to an independent traffic movement or combination of movements.
- 240. **Signal Section**—the assembly of a signal housing, signal lens, if any, and light source with necessary components to be used for displaying one signal indication.
- 241. **Signal Sequence (Sequence of Indications)**—the order of appearance of signal indications during successive intervals of a signal cycle.
- 242. **Signal System**—two or more traffic control signals operating in signal coordination.
- 243. **Signal Timing**—the amount of time allocated for the display of a signal indication.
- 244. **Signal Visor**—that part of a signal section that directs the signal indication specifically to approaching traffic and reduces the effect of direct external light entering the signal lens.
- 245. **Signing**—individual signs or a group of signs, not necessarily on the same support(s), that supplement one another in conveying information to road users.
- 246. **Simultaneous Preemption**—notification of approaching rail traffic is forwarded to the highway traffic signal controller unit or assembly and railroad or light rail transit active warning devices at the same time.
- 247. **Site Roadways Open to Public Travel**—Roadways and bikeways on sites of shopping centers, office parks, airports, schools, universities, sports arenas, recreational parks, and other similar business, governmental, and/or recreation facilities that are publicly or privately owned but where the public is allowed to travel without full-time access restrictions. Two types of roadways are not included in this definition: (1) roadways where access is restricted at all times by gates and/or guards to residents, employees, or other specifically-authorized persons; and (2) private highway-rail grade crossings. Site roadways open to public travel do not include parking areas (see definition in this Section), including the driving aisles (see definition in this Section) within those parking areas. The MUTCD national standard and Caltrans standards and specifications for traffic control devices shall not be applicable to privately owned and maintained roads or commercial establishments, unless the particular city or county enacts an ordinance or resolution to this effect. Refer to CVC Sections 21100, 21100.1, 21107, 21107.5, 21107.6, and 21107.7.
- 247a. **Private Road or Driveway** – "Private road or driveway" is a way or place in private ownership and used for vehicular travel by the owner and those having express or implied permission from the owner but not by other members of the public. Refer to CVC 490.
- 248. **Special-Purpose Road**—a low-volume, low-speed road that serves recreational areas or resource development activities.
- 249. **Speed**—speed is defined based on the following classifications:
 - (a) **Average Speed**—the summation of the instantaneous or spot-measured speeds at a specific location of vehicles divided by the number of vehicles observed.
 - (b) **Design Speed**—a selected speed used to determine the various geometric design features of a roadway.
 - (c) **85th-Percentile Speed**—the speed at or below which 85 percent of the motor vehicles travel.
 - (d) **Operating Speed**—a speed at which a typical vehicle or the overall traffic operates. Operating speed might be defined with speed values such as the average, pace, or 85th- percentile speeds.
 - (e) **Pace**—the 10 mph speed range representing the speeds of the largest percentage of vehicles in the traffic stream.
- 250. **Speed Limit**—the maximum (or minimum) speed applicable to a section of highway as established by law or regulation.
- 250a. **Speed Measurement Markings**—a white transverse pavement marking placed on the roadway to assist the

enforcement of speed regulations.

- 251. **Speed Zone**—a section of highway with a speed limit that is established by law or regulation, but which might be different from a legislatively-specified statutory speed limit.
- 252. **Splitter Island**—a median island used to separate opposing directions of traffic entering and exiting a roundabout.
- 252a. **State highway – Any highway owned and operated by Caltrans.**
- 253. **Station Crossing**—a pathway grade crossing that is associated with a station platform.
- 254. **Statutory Speed Limit**—a speed limit established by legislative action (such as Federal or State law) that typically is applicable for a particular class of highways with specified design, functional, jurisdictional, and/or location characteristics and that is not necessarily displayed on Speed Limit signs.
- 255. **Steady (Steady Mode)**—the continuous display of a signal indication for the duration of an interval, signal phase, or consecutive signal phases.
- 256. **Stop Line**—a solid white pavement marking line extending across approach lanes to indicate the point at which a stop is intended or required to be made. For all purposes, limit line(s) as defined per CVC 377 shall mean stop line(s).
- 257. **Street**—see Highway. "Street" is a way or place of whatever nature, publicly maintained and open to the use of the public for purposes of vehicular travel. Refer to CVC 590 and 591.
- 258. **Supplemental Signal Face**—a signal face that is not a primary signal face but which is provided for a given approach or separate turning movement to enhance visibility or conspicuity.
- 259. **Swing Gate**—a self-closing fence-type gate designated to swing open away from the track area and return to the closed position upon release.
- 260. **Symbol**—the approved design of a pictorial or graphical representation of a specific traffic control message for signs, pavement markings, traffic control signals, or other traffic control devices, as shown in the MUTCD.
- 261. **Temporary Traffic Control Signal**—see Highway Traffic Signal.
- 262. **Temporary Traffic Control Zone**—an area of a highway, pedestrian or bicycle facility where road user conditions are changed because of a work zone or incident by the use of temporary traffic control devices, flaggers, uniformed law enforcement officers, or other authorized personnel.
- 263. **Theoretical Gore**—a longitudinal point at the upstream end of a neutral area at an exit ramp or channelized turn lane where the channelizing lines that separate the ramp or channelized turn lane from the adjacent through lane(s) begin to diverge, or a longitudinal point at the downstream end of a neutral area at an entrance ramp or channelized entering lane where the channelizing lines that separate the ramp or channelized entering lane from the adjacent through lane(s) intersect each other.
- 264. **Through Train**—a train movement that continues without stopping or reversing direction throughout the entire length of the rail traffic detection circuit length approaching a highway- rail grade crossing.
- 265. **Timed Exit Gate Operating Mode**—a mode of operation where the exit gate descent at a grade crossing is based on a predetermined time interval.
- 266. **Toll Booth**—a shelter where a toll attendant is stationed to collect tolls or issue toll tickets. A toll booth is located adjacent to a toll lane and is typically set on a toll island.
- 267. **Toll Collection**—manual or electronic methods and elements used to collect a fee for use of a toll facility. Toll collection methods include:
 - (a) **Electronic Toll Collection (ETC)**—a cashless system for automated collection of tolls from moving or stopped vehicles through wireless technologies such as radio-frequency communication or optical scanning. ETC systems are classified as one of the following:
 - 1. systems that require users to have registered toll accounts, with the use of equipment inside or on the exterior of vehicles, such as a transponder or barcode decal, that communicates with or is detected by roadside or overhead receiving equipment, or with the use of license plate optical scanning, to automatically deduct the toll from the registered user account,
 - 2. systems that do not require users to have registered toll accounts because vehicle license plates are optically scanned and invoices for the toll amount are typically sent through postal mail to the address of the vehicle owner, or
 - 3. systems that allow electronic toll collection for both registered and non-registered toll accounts.

- (b) **Open-Road Tolling (ORT)**—a system designed to allow electronic toll collection (ETC) from vehicles traveling at posted speeds. Open-road tolling might be used on toll roads or toll facilities in conjunction with toll plazas. Open-road tolling is also typically used on managed lanes and on toll facilities that only accept payment by ETC.
- (c) **Manual Toll Collection**—a system of toll collection from stopped vehicles through acceptance of cash, toll tickets, tokens, or credit cards, and may involve issuance of receipts. Toll collection may be by a machine or toll booth attendant.
 - 1. **Toll-Ticket System**—a toll system in which the user of a toll road must stop to receive a ticket from a machine or toll booth attendant upon entering the toll facility. The ticket denotes the user's point of entry and, upon exiting the toll system, the user surrenders the ticket and is charged a toll based on the distance traveled between the points of entry and exit.
 - 2. **Attended Lane (Manual Lane)**—a toll lane adjacent to a toll booth occupied by a human toll collector who makes change, issues receipts, and performs other toll-related functions. Attended lanes at toll plazas typically require vehicles to stop to pay the toll.
 - 3. **Exact Change Lane (Automatic Lane)**—a non-attended toll lane that has a receptacle into which road users deposit coins totaling the exact amount of the toll. Exact Change lanes at toll plazas typically require vehicles to stop to pay the toll.
- 268. **Toll Island**—a raised island on which a toll booth or other toll collection and related equipment are located.
- 269. **Toll Lane**—an individual lane located within a toll plaza in which a toll payment is collected or, for toll-ticket systems, a toll ticket is issued.
- 270. **Toll Plaza**—the location at which tolls are collected consisting of a grouping of toll booths, toll islands, toll lanes, and, typically, a canopy. Toll plazas might be located on highway mainlines or on interchange ramps. A mainline toll plaza is sometimes referred to as a barrier toll plaza because it interrupts the traffic flow.
- 271. **Toll Road (Facility)**—a road or facility that is open to traffic only by payment of a user toll or fee. A “toll highway” or “toll road” is a publicly owned way or place open to the use of the public for purposes of vehicular travel which use requires the payment of a fee. Refer to CVC 611.
- 272. **Traffic**—pedestrians, bicyclists, ridden or herded animals, vehicles, streetcars, and other conveyances either singularly or together while using for purposes of travel any highway or site roadway open to public travel. (see definition of private road open to public travel). As per CVC 620, the term "traffic" includes pedestrians, ridden animals, vehicles, street cars, and other conveyances, either singly or together, while using any highway for purposes of travel.
- 273. **Traffic Control Device**—all signs, signals, markings, channelization devices, or other devices that use colors, shapes, symbols, words, sounds, and/or tactile information for the primary purpose of communicating a regulatory, warning, or guidance message to road users on a street, highway, pedestrian facility, bikeway, pathway, or site roadway open to public travel. (see definition of Site Roadways Open to Public Travel) Section 1A.02 contains information regarding items that are not traffic control devices.
- 274. **Traffic Control Signal (Traffic Signal)**—see Highway Traffic Signal.
- 275. **Train**—one or more locomotives coupled, with or without cars, that operates on rails or tracks and to which all other traffic must yield the right-of-way by law at highway-rail grade crossings.
- 276. **Transverse Markings**—pavement markings that are generally placed perpendicular and across the flow of traffic such as shoulder markings; word, symbol, and arrow markings; stop lines; crosswalk lines; parking space markings; and others.
- 277. **Traveled Way**—the portion of the roadway for the movement of vehicles, exclusive of the shoulders, berms, sidewalks, and parking lanes.
- 278. **Turn Bay**—a lane for the exclusive use of turning vehicles that is formed on the approach to the location where the turn is to be made. In most cases where turn bays are provided, drivers who desire to turn must move out of a through lane into the newly-formed turn bay in order to turn. A through lane that becomes a turn lane is considered to be a lane drop rather than a turn bay.
- 279. **Two-Stage Bicycle Turn Box**—a designated area at an intersection intended to provide bicyclists a place

to wait for traffic to clear before proceeding in a different direction of travel.

- 280. **Uncontrolled Approach**—an approach on which vehicles are not controlled by a traffic control signal, hybrid beacon, STOP sign, or YIELD sign.
- 281. **Upstream**—a term that refers to a location that is encountered by traffic prior to a downstream location as it flows in an “upstream to downstream” direction. For example, “the upstream end of a lane line separating the turn lane from a through lane on the approach to an intersection” is the end of the line that is furthest from the intersection.
- 282. **Urban Street**—a type of street normally characterized by relatively low speeds, wide ranges of traffic volumes, narrower lanes, frequent intersections and driveways, significant pedestrian traffic, and more businesses and houses.
- 283. **Variable Message Sign**—see Changeable Message Sign.
- 284. **Vehicle**—every device in, upon, or by which any person or property can be transported or drawn upon a highway, except trains and light rail transit operating in exclusive or semi-exclusive alignments. Light rail transit equipment operating in a mixed-use alignment, to which other traffic is not required to yield the right-of-way by law, is a vehicle. As per CVC 670, a “vehicle” is a device by which any person or property may be propelled, moved, or drawn upon a highway, excepting a device moved exclusively by human power or used exclusively upon stationary rails or tracks.
- 285. **Vibrotactile Pedestrian Device**—an accessible pedestrian signal feature that communicates, by touch, information about pedestrian timing using a vibrating surface.
- 286. **Visibility-Limited Signal Face or Visibility-Limited Signal Section**—a type of signal face or signal section designed (or shielded, hooded, or louvered) to restrict the visibility of a signal indication from the side, to a certain lane or lanes, or to a certain distance from the stop line.
- 287. **Walk Interval**—an interval during which the WALKING PERSON (symbolizing WALK) signal indication is displayed.
- 288. **Warning Light**—a portable, powered, yellow, lens-directed, enclosed light that is used in a temporary traffic control zone in either a steady burn or a flashing mode.
- 289. **Warning Sign**—a sign that gives notice to road users of a situation that might not be readily apparent.
- 290. **Warrant**—a warrant describes a threshold condition based upon average or normal conditions that, if found to be satisfied as part of an engineering study, shall result in analysis of other traffic conditions or factors to determine whether a traffic control device or other improvement is justified. Warrants are not a substitute for engineering judgment. The fact that a warrant for a particular traffic control device is met is not conclusive justification for the installation of the device.
- 291. **Wayside Horn System**—a stationary horn (or a series of horns) located at a grade crossing that is used in conjunction with train-activated or light rail transit-activated warning systems to provide audible warning of approaching rail traffic to road users on the highway or pathway approaches to a grade crossing, either as a supplement or alternative to the sounding of a locomotive horn.
- 292. **Worker**—a person on foot whose duties place him or her within the right-of-way of a street, highway, or pathway, such as: construction and maintenance forces; survey crews; utility crews; responders to incidents within the right-of-way; and law enforcement personnel when directing traffic, investigating crashes, and handling lane closures, obstructed roadways, and disasters within the right-of-way.
- 293. **Wrong-Way Arrow**—a slender, elongated, white pavement marking arrow placed upstream from the ramp terminus to indicate the correct direction of traffic flow. Wrong-way arrows are intended primarily to warn wrong-way road users that they are going in the wrong direction.
- 294. **Yellow Change Interval**—the first interval following the green or flashing arrow interval during which the steady yellow signal indication is displayed.
- 295. **Yield Line**—a row of solid white isosceles triangles pointing toward approaching vehicles extending across approach lanes to indicate the point at which the yield is intended or required to be made.

Support:

- 04 The following terms are defined in the California Vehicle Code:
 - 1. All-terrain vehicle – Section 111.
 - 2. Amber - Section 112.
 - 3. Authorized Emergency Vehicle - Section 165.

4. Autoette – Section 175
5. Automated Enforcement System - Section 210.
6. Axle - Section 230.
7. Bus - Section 233.
8. City – Section 255.
9. Clean Fuel Vehicle - Section 257.
10. Commercial Vehicle - Section 260.
11. County – Section 270.
12. Darkness – Section 280
13. Department of Transportation - Section 291.
14. Disabled Person - Section 295.5.
15. Golf Cart - Section 345.
16. Hazardous Material - Section 353.
17. Liquefied Petroleum Gas – Section 380.
18. Local Authorities - Section 385.
19. Low Speed Vehicle – Section 385.5.
20. Motorcycle - Section 400.
21. Motor Vehicle - Section 415.
22. Official Traffic Control Device - Section 440.
23. Official Traffic Control Signal - Section 445.
24. Pickup Truck - Section 471.
25. Pilot Car – Section 472.
26. Private School - Section 492.
27. Residence District – Section 515.
28. Ridesharing – Section 522.
29. Right-of-way – Section 525.
30. Safety Zone – Section 540.
31. Schoolbus - Section 545.
32. Snowmobile - Section 557.
33. Stop or Stopping - Section 587.
34. Street or Highway – Highway Exclusion - Section 592.
35. Through Highway - Section 600.
36. Trailer - Section 630.
37. U-Turn - Section 665.5.

Section 1C.03 Meanings of Acronyms and Abbreviations Used in this Manual

Standard:

- 01 **The following acronyms and abbreviations, when used in this Manual, shall have the following meanings:**
1. **AADT—annual average daily traffic**
 2. **AASHTO—American Association of State Highway and Transportation Officials**
 3. **AC—alternating current**
 4. **ADA—Americans with Disabilities Act**
 5. **ADAS—Advanced Driver Assistance Systems**
 6. **ADS—Automated Driving System**
 7. **ADT—average daily traffic**
 8. **AFAD—Automated Flagger Assistance Device**
 9. **ANSI—American National Standards Institute**
 10. **AREMA—American Railway Engineering and Maintenance-of-Way Association**
 11. **AV—automated vehicle**
 12. **cd/lx/m²—candelas per lux per square meter**
 13. **CFR—Code of Federal Regulations**
 14. **CMS—changeable message sign**

15. dBA—A-weighted decibels
16. DC—direct current
17. DDT—Dynamic Driving Task
18. EPA—Environmental Protection Agency
19. ETC—electronic toll collection
20. EV—electric vehicle
21. FHWA—Federal Highway Administration
22. FRA—Federal Railroad Administration
23. ft—foot or feet
24. FTA—Federal Transit Administration
25. HOV—high-occupancy vehicle
26. IEEE—Institute of Electrical and Electronics Engineers
27. IES—Illuminating Engineering Society
28. ILEV—inherently low-emission vehicle
29. in—inch(es)
30. ISEA—International Safety Equipment Association
31. ITE—Institute of Transportation Engineers
32. ITS—intelligent transportation systems
33. L—taper length
34. LED—light-emitting diode
35. LP—liquified petroleum
36. LRT—light rail transit
37. mi—mile(s)
38. MPH or mph—miles per hour
39. MUTCD—Manual on Uniform Traffic Control Devices for Streets and Highways
40. N—length of one line segment plus one gap of a broken line
41. NCEES—National Council of Examiners for Engineering and Surveying
42. NCHRP—National Cooperative Highway Research Program
43. ODD—Operational Design Domain
44. OPM—U.S. Office of Personnel Management
45. ORT—open-road tolling
46. PCMS—portable changeable message sign
47. PRT—perception-response time
48. RRFB—rectangular rapid-flashing beacon
49. RV—recreational vehicle
50. SAE—Society of Automotive Engineers
51. SHV—Specialized Hauling Vehicle
52. SPF—safety performance function
53. TA—Typical Application
54. TDD—telecommunication device for the deaf
55. TRB—Transportation Research Board
56. TTC—temporary traffic control
57. U.S.—United States
58. U.S.C.—United States Code
59. USDOT—United States Department of Transportation
60. UVC—Uniform Vehicle Code
61. VPH or vph—vehicles per hour
62. V2I—vehicle to infrastructure

Support:

- 02 The following list of acronyms are related to traffic control devices and provided for ease of use and as a handy reference:
1. AHS Automated Highway System
 2. Alt or ALT Alternate

3. AMBER	Use of CMS signs for child abduction alert messages
4. AMIS	Automated Management Information System
5. APWA	American Public Works Association
6. ASCE	American Society of Civil Engineers
7. ASTM	American Society for Testing and Materials
8. ATIS	Advanced Traveler Information Systems
9. ATMS	Advanced Traffic Management System
10. ATSSA	American Traffic Safety Services Association
11. AVCS	Automated Vehicle Control System
12. BART	Bay Area Rapid Transit
13. BT&H	Business, Transportation & Housing Agency
14. CA	California
15. CAC	California Administrative Code
16. Cal/OSHA	California Occupational Safety and Health Administration
17. CA MUTCD	California Manual on Uniform Traffic Control Devices for Streets and Highways
18. Caltrans	California Department of Transportation
19. CBD	Central Business District
20. CCMP	County Congestion Management Plan
21. CCO	Contract Change Order
22. CCR	California Code of Regulations
23. CDC	California Department of Conservation
24. CDF	California Department of Forestry
25. CDFW	California Department of Fish and Wildlife
26. CEAC	County Engineers Association of California
27. CELSOC	Consulting Engineering and Land Surveyors of California
28. CHIN	California Highway Information Network
29. CHP	California Highway Patrol
30. CMA	Congestion Management Agency
31. CMP	Congestion Management Program
32. CMS	Changeable Message Sign or Congestion Management System
33. COB	Close of Business
34. COZEPP	Construction Zone Enhanced Enforcement Program
35. CPC	California Penal Code
36. CPH	California Permit Handbook
37. CPM	Critical Path Method
38. CPUC	California Public Utilities Commission
39. CRHR	California Register of Historical Resources
40. CT	Caltrans or California Department of Transportation
41. CTA	California Trucking Association
42. CTC	California Transportation Commission
43. CTCDC	California Traffic Control Devices Committee
44. CTP	California Transportation Plan
45. CURE	Clean-up Roadside Environment
46. CVC	California Vehicle Code
47. Del	Delineator
48. DHV	Design Hourly Volume
49. DI	Delay Index, Drop Inlet or Drainage Inlet
50. DIB	Design Information Bulletin
51. DMV	Department of Motor Vehicles
52. DOT	Department of Transportation
53. DTO	Division of Traffic Operations
54. DYS	Double Yellow Stripe



55. ENGR	Engineer or Engineering
56. EP	Edge of Pavement or Environmental Planning
57. ES	Edge of Shoulder or End Section
58. ESA	Environmentally Sensitive Area or Endangered Species Act
59. ESAL	Equivalent Single-Axle Loads
60. ETW	Edge of Traveled Way
61. Exp or EXP	Expressway
62. F&E System	Freeway and Expressway System
63. FAI	Federal-aid Interstate
64. FAP	Federal-aid Primary
65. FCC	Federal Communication Commission
66. FEBT	Facing Eastbound Traffic
67. FNBT	Facing Northbound Traffic
68. FR	Federal Register
69. Fr Rd	Frontage Road
70. FS	Far Side
71. FSBT	Facing Southbound Traffic
72. FSP	Freeway Service Patrol
73. FWBT	Facing Westbound Traffic
74. Fwy or FWY	Freeway
75. GR	Guard Railing
76. HAR	Highway Advisory Radio
77. HAZMAT	Hazardous Material
78. HCM	Highway Capacity Manual
79. HDM	Highway Design Manual
80. HOT	High Occupancy Toll
81. HOVL	High-Occupancy Vehicle Lane
82. HM	Hazardous Material
83. HQ	Caltrans Headquarters
84. HW	Hazardous Waste
85. Hwy or HWY	Highway
86. IGR	Intergovernmental Review
87. IRLs	In-Roadway Lights
88. IRWLs	In-Roadway Warning Lights
89. ISO	International Standards Organization
90. ISTEA	Intermodal Surface Transportation Efficiency Act of 1991 (Federal)
91. ITS	Intelligent Transportation Systems or Institute of Transportation Studies
92. ITTE	Institute of Transportation & Traffic Engineering
93. IVHS	Intelligent Vehicle Highway System
94. KP	Kilometer Post
95. LF	Linear Foot
96. Ln or LN	Lane
97. Loc or LOC	Location
98. LOS	Level of service (Traffic Congestion Measure)
99. LPA	Local Public Agency
100.MADT	Monthly Average Daily Traffic
101.Maint	Maintenance
102.Max or MAX	Maximum
103.MAZEPP	Maintenance Zone Enhanced Enforcement Program
104.MBGR	Metal Beam Guard Rail
105.Med or MED	Median
106.MF	Mixed Flow

107.Min or MIN	Minimum
108.Misc or MISC	Miscellaneous
109.mm	Millimeter
110.MPO	Metropolitan Planning Organization
111.MT	Mass Transit
112.MTC	Metropolitan Transportation Commission (for the San Francisco Bay Area)
113.MVM	Per Million Vehicle Miles
114.NCRP	National Cooperative Research Program
115.NCUT	National Committee on Urban Transportation
116.NCUTCD	National Committee on Uniform Traffic Control Devices
117.NCUTLO	National Committee on Uniform Traffic Laws and Ordinances
118.NHI	National Highway Institute
119.NHL	National Historic Landmark
120.NHS	National Highway System
121.NHSB	National Highway Safety Bureau
122.NHTSA	National Highway Traffic Safety Administration
123.NNIH	National Network of Interstate Highways
124.NPRM	Notice of Proposed Rule Making
125.NPS	National Park Service (U.S.)
126.NR	National Register (of Historic Places, abbreviation)
127.NRHP	National Register of Historic Places
128.NS	Near Side
129.NTS	National Transportation System or Not To Scale
130.NTSB	National Transportation Safety Board
131.O & D	Origin and Destination
132.OCTA	Orange County Transportation Authority
133.ODA	Outdoor Advertising (Act)
134.OES	Office of Emergency Services
135.OG	Original Ground
136.OH	Overhead (Structure)
137.OHP	Office of Historic Preservation
138.OSA	Office of the State Architect
139.OSHA	Occupational Safety and Health Administration
140.P2P	Peer-to-Peer Program
141.P&P	Policy & Procedure
142.PCH	Pacific Coast Highway
143.PDO	Property Damage Only
144.PE	Professional Engineer or Project Engineer
145.Ped or PED	Pedestrian
146.PHF	Peak Hour Factor
147.PHI	Point of Historic Interest
148.PM	Post Mile
149.PMS	Pavement Management System
150.PMT	Passenger Miles Traveled
151.PS&E	Plans, Specifications, and Estimate
152.Pvmt or PVMT	Pavement
153.PUC	California Public Utilities Commission
154.R&D	Research and Development
155.RCE	Registered Civil Engineer
156.RE	Resident Engineer or Right of Entry
157.ROW	Right of Way
158.RR	Railroad

159.Rte or RTE	Route or Registered Traffic Engineer
160.R/W	Right of Way
161.Rwy	Railway
162.RXR	Railroad Crossing
163.S&H Code	Streets & Highways Code
164.SACOG	Sacramento Area Council of Governments
165.SAFE	Service Authority for Freeways & Expressways
166.SB	Southbound or Senate Bill
167.SCAG	Southern California Association of Governments
168.SCRRA	Southern California Regional Rail Authority
169.SCRTD	Southern California Rapid Transit District
170.SHELL	State Highway Extra Legal Loads
171.SHL	State Historical Landmark
172.SHOPP	State Highway Operation and Protection Program
173.SHS	State Highway System or Standard Highway Signs and Markings book (FHWA)
174.SI	Safety Index or International System of Units (Metric)
175.SR	State Route or Senate Resolution
176.SRRA	Safety Roadside Rest Area
177.SSD	Stopping Sight Distance
178.SSP's	Standard Special Provisions
179.STA	State Transit Assistance
180.STIP	State Transportation Improvement Program
181.Str or STR	Structure
182.SW	Sidewalk or Soundwall
183.SWITRS	Statewide Integrated Traffic Records Systems
184.TASAS	Traffic Accident Surveillance and Analysis System
185.TC	Traffic Control
186.TCM	Transportation Control Measure
187.TCP	Traffic/Transportation Control Plan
188.TEA21	Transportation Efficiency Act for the 21st Century
189.Temp or TEMP	Temporary
190.TI	Traffic Index
191.TM	Caltrans Traffic Manual
192.TMC	Traffic Management Center
193.TMP	Transportation Management Plan
194.TMT	Traffic Management Team
195.TODS	Tourist-Oriented Directional Signs
196.TOPD	Traffic Operations Policy Directives
197.TOS	Traffic Operations System
198.TS	Traffic Signal
199.TSS	Caltrans Traffic Sign Specifications
200.UC	Under Crossing
201.UP	Underpass
202.UPRR	Union Pacific Railroad
203.URR	Urban Rail Transit Program (State)
204.USA	Underground Service Alert
205.USCE	United States (Army) Corps of Engineers (Federal)
206.VMS	Variable Message Sign
207.VMT	Vehicle Miles Traveled
208.vphpl or VPHPL	Vehicles Per Hour Per Lane
209.WATCH	Work Area Traffic Control Handbook
210.WIM	Weigh-in Motion

211.WS	White Stripe
212.Xing or XING	Crossing
213.YS	Yellow Stripe

DRAFT

ATTACHMENT F

CHAPTER 1D. PROVISIONS APPLICABLE TO TRAFFIC CONTROL DEVICES IN GENERAL

Section 1D.01 Purpose and Principles of Traffic Control Devices

Support:

- 01 The purpose of traffic control devices, as well as the principles for their use, is to promote highway safety, inclusion and mobility of all road users, and efficiency by providing for the orderly movement of road users on streets, highways, bikeways, and site roadways open to public travel throughout the Nation. Section 1A.03 contains additional information on target road users.
- 02 This Manual contains the basic principles that govern the design and use of traffic control devices for all streets, highways, bikeways, and site roadways open to public travel (see definition in Section 1C.02) regardless of type or class or the public agency, official, or owner having jurisdiction. The text of this Manual specifies the restriction on the use of a device if it is intended for limited application or for a specific system. It is important that these principles be given primary consideration in the selection and application of each device.

Guidance:

- 03 *To be effective, a traffic control device should:*
- A. Fulfill a need;
 - B. Command attention;
 - C. Convey a clear, simple meaning;
 - D. Command respect from road users; and
 - E. Give adequate time for proper response.
- 04 *Design, placement, operation, maintenance, and uniformity are aspects that should be carefully considered by the engineer in order to maximize the ability of a traffic control device to be consistent with the five principles listed in Paragraph 3 of this Section. Vehicle speed, geometrics and other relevant factors and road-user types should be carefully considered as an element elements that governs govern the design, operation, placement, and location of various traffic control devices.*
- 05 *The proper use of traffic control devices should provide the road user with the information necessary to safely, efficiently, and lawfully use the streets, highways, pedestrian facilities, and bikeways.*

Standard:

- 06 **Traffic control devices used on site roadways open to public travel shall have the same shape, color, and meaning as those required by the MUTCD for use on public highways, except as provided otherwise elsewhere in this Manual. Sign size exceptions are noted in each Part as applicable.**

Section 1D.02 Responsibility and Authority for Traffic Control Devices

Standard:

- 01 **The responsibility for the design, placement, operation, maintenance, and uniformity of traffic control devices in compliance with the provisions of this Manual shall rest with the public agency or the official having jurisdiction, or, in the case of site roadways open to public travel, with the private owner or private official having jurisdiction.**

Support:

- 01a In addition to California MUTCD, Caltrans publishes various supplemental documents, which in addition to other topics, also contain specifications and requirements for traffic control devices, including their use and placement, when performing work on State highways. These documents include Standard Plans, Standard Specifications, Standard Special Provisions, Proven Safety Countermeasure publications, California Manual for Setting Speed Limits, other manuals, Traffic Calming Guide, other guidelines, Flagging Instructions Handbook, other handbooks, pamphlets, bulletins (including Traffic Safety Bulletins) and memos (including Traffic Operation Policy Directives (TOPD)). In some cases, the specifications and requirements for traffic control devices contained in these publications, although in compliance with the minimum standards of the California MUTCD and the National MUTCD, can be more stringent (higher standard) than those shown in the California MUTCD and would be applicable to the projects on the State highway system. Refer to Section 1B.02 for more details.

Standard:

- 02 **All regulatory traffic control devices shall be supported by laws, ordinances, or regulations.**
- 03 **Traffic control devices, public announcements or notices, and other signs or messages within the highway right-of-way shall be placed only as authorized by a public authority or the official having jurisdiction, or, in the case of site roadways or private toll roads open to public travel, by the private owner or private official having jurisdiction, for the purpose of regulating, warning, or guiding traffic.**

Support:

- 03a Refer to Sections 1A.01, 1B.01, 1C.02 (phrase "Site Roadways Open to Public Travel") for authority and applicability of CA MUTCD on various types of public and private roadway facilities.
- 03b The delegation of maintenance activities to local authorities is usually exercised under the authority of Streets and Highways Code Section 130.

Standard:

- 04 **When the public agency or the official having jurisdiction over a street or highway or, in the case of site roadways open to public travel, the private owner or private official having jurisdiction, has granted proper authority, others such as contractors and public utility companies shall be allowed to install temporary traffic control devices in temporary traffic control zones. Such traffic control devices shall comply with the provisions of this Manual.**
- 05 **Signs and other devices that do not have any traffic control purpose that are placed within the highway right-of-way shall not be located where they will interfere with, or detract from, traffic control devices.**

Support:

- 06 States are encouraged to adopt, through policy or legislation, the provisions of 23 CFR 750.108 that restrict outdoor advertising from resembling traffic control devices.
- 07 CVC references are used throughout this California MUTCD when the subject matter relates to State law.

Standard:

- 08 **CVC 21400 provides that Caltrans shall, after consultation with local agencies and public hearings, adopt rules and regulations prescribing uniform standards and specifications for all official traffic control devices placed pursuant to the provisions of the Code.**
- 09 **CVC 21401 provides that only those official traffic control devices that conform to the uniform standards and specifications promulgated by Caltrans shall be placed upon a street or highway.**
- 10 **CVC 21350 and 21351 give basic authority to Caltrans and local authorities, in their respective jurisdictions, to place and maintain such official traffic control devices.**

Option:

- 11 Local authorities may adopt rules and regulations by ordinance or resolution for regulating traffic by means of official traffic control devices meeting the requirements of CVC Section 21400. Refer to CVC Section 21100 (d).

Standard:

- 12 **Local agencies responsible for the development or operation of bikeways or roadways where bicycle travel is permitted shall utilize all minimum safety design criteria and uniform specifications and symbols for signs, markers, and traffic control devices established by Caltrans. Refer to Streets and Highways Code 891.**

Support:

- 13 The use of unauthorized traffic control devices is prohibited by CVC 21465.

Standard:

- 14 **Prohibited traffic control devices constitute a public nuisance and shall be removed per CVC 21467.**

Support:

- 15 This does not modify or limit the authority of the Public Utilities Commission to erect or maintain traffic control devices as authorized by law. Refer to CVC 21468.
- 16 Private advertising is prohibited on any highway right-of-way by Section 5403 (a) of the Business and Professions Code. "Highway" in this context includes roads, streets, boulevards, lanes, courts, places, commons, trails, ways or other rights-of-way or easements used for or laid out and intended for the public passage of vehicles or of vehicles and persons per Section 5213 of the

Business and Professions Code. Also refer to CVC 360 for definition of “highway”.

- 17 The California Public Utilities Commission is the state regulatory agency with statutory authority over highway-rail grade crossings and highway-light rail transit grade crossings. Refer to Public Utilities Code Section 1202(a).

Section 1D.03 Engineering Study and Engineering Judgment

Support:

- 01 Definitions of professional engineer, engineering study, and engineering judgment are provided in Section 1C.02.
- 01a Refer to CVC 627 for definition and requirements of “Engineering and Traffic Survey”. It is also abbreviated in this manual as E&TS.
- 02 The application of engineering study and engineering judgment is a fundamental principle of the use of traffic control devices. It is for this reason that, in most cases, the selection of a particular device is not required by a Standard provision but is determined by engineering study or engineering judgment. Many Standard provisions in this Manual specifically require, by explicit language in the individual provisions or by implication, the application of engineering study or engineering judgment in applying those Standards. Site-specific conditions might result in the determination that it is impossible or impracticable to comply with a Standard at that location. In such a case, a deviation from the requirement of a particular Standard at that location might be the only possibility. In such limited, specific cases, the deviation is allowed, provided that the agency or official having jurisdiction fully documents, through an engineering study, the engineering basis for the deviation.

Standard:

- 03 **This Manual describes the application of traffic control devices, but shall not be a legal requirement for their installation.**

Support:

- 04 The MUTCD does not mandate, and is not intending to imply, that an engineer must make the final decision whether to implement or execute the determination or advice of an engineer by installing or constructing the traffic control device to the engineer’s specification in the field. Rather, the engineer, individual under supervision of an engineer, or other individual as duly authorized by State law to engage in the practice of engineering, develops an engineering-based solution that includes the specifications for selection and placement of traffic control devices, but the responsibility for a final decision to implement that solution rests with the agency having jurisdiction over the roadway, after consultation with and based on advice from the engineer.

Guidance:

- 05 *The decision to use a particular device at a particular location should be made on the basis of either an engineering study or the application of engineering judgment by an engineer, someone under the direct supervision of an engineer, or other individual as duly authorized by State law to engage in the practice of engineering. Thus, while this Manual provides Standards, Guidance, and Options for design and application of traffic control devices, this Manual should not be considered a substitute for engineering judgment. Engineering judgment should be exercised in the selection and application of traffic control devices, as well as in the location and design of roads and streets that the devices complement.*
- 06 *Early in the processes of location and design of roads and streets, engineers should coordinate such location and design with the design and placement of the traffic control devices to be used with such roads and streets.*
- 07 *Jurisdictions, or owners of site roadways or private toll roads open to public travel, with responsibility for traffic control that do not have an engineer on their staff who is trained and/or experienced in traffic control devices should seek engineering assistance from others, such as the State transportation agency, their county, a nearby large city, or a traffic engineering consultant.*

Support:

- 08 The provisions of this Manual are intended to be interpreted and applied by engineers or those under the supervision of an engineer. The construction of the provisions of this Manual, therefore, are informed by bases referenced in Paragraphs 9 and 10 of this Section.
- 09 The National Council of Examiners for Engineering and Surveying (NCEES) has defined the practice of engineering as “any service or creative work requiring engineering education, training, and experience in the application of engineering principles and the interpretation of engineering data to engineering activities that potentially impact the

health, safety, and welfare of the public.” The practice of engineering is, therefore, subject to regulation in the public interest and is regulated by the State licensing boards in order to safeguard the health, safety, and welfare of the public. The NCEES has defined an engineer as “an individual who is qualified to practice engineering by reason of engineering education, training, and experience in the application of engineering principles and the interpretation of engineering data.”

10 The U.S. Office of Personnel Management (OPM) has defined the professional knowledge of engineering as “the comprehensive, in-depth knowledge of mathematical, physical, and engineering sciences applicable to a specialty field of engineering that characterizes a full 4-year engineering program leading to a bachelor's degree, or the equivalent.” The OPM has defined professional ability to apply engineering knowledge as “the ability to (a) apply fundamental and diversified professional engineering concepts, theories, and practices to achieve engineering objectives with versatility, judgment, and perception; (b) adapt and apply methods and techniques of related scientific disciplines; and (c) organize, analyze, interpret, and evaluate scientific data in the solution of engineering problems.”

11 Requisite technical training in the application of the principles of the MUTCD might be available from the State's Local Technical Assistance Program (LTAP) for needed engineering guidance and assistance.

Section 1D.04 Design of Traffic Control Devices

Guidance:

01 *Devices should be designed so that features such as size, shape, color, composition, lighting or retroreflection, and contrast are combined to draw attention to the devices; so that size, shape, color, and simplicity of message combine to produce a clear meaning; so that legibility and size combine with placement to provide adequate time for response; and so that uniformity, size, legibility, and reasonableness of the message combine to command respect.*

Option:

02 Except for symbols and colors, minor modifications in the specific design elements of a device may be made based on an engineering study or engineering judgment, in accordance with Paragraph 3 of this Section, provided the essential appearance characteristics are preserved.

Guidance:

03 *Aspects of the standard design of a traffic control device should not be modified unless there is a demonstrated need in unusual circumstances, based on an engineering study or engineering judgment.*

Support:

04 An example of acceptably modifying the design of a device would be to modify the Combination Horizontal Alignment/Intersection (W1-10) sign to show intersecting side roads on both sides rather than on just one side of the major road within the curve.

Section 1D.05 Color Code

Support:

01 The following color code establishes general meanings for 11 colors of a total of 13 colors that have been identified as being appropriate for use in conveying traffic control information.

Standard:

02 **The general meaning of the 13 colors shall be as follows:**

- A. Black—regulation**
- B. Blue—road-user services guidance, tourist information, and evacuation route**
- C. Brown—recreational and cultural interest area guidance**
- D. Coral—reserved for future designation (see Paragraph 4 of this Section)**
- E. Fluorescent Pink—incident management**
- F. Fluorescent Yellow-Green—pedestrian warning, bicycle warning, playground warning, school bus warning, and school warning**
- G. Green—indicated movements or actions permitted and direction guidance**
- H. Light Blue—reserved for future designation (see Paragraph 4 of this Section)**
- I. Orange—temporary traffic control**
- J. Purple—restricted to use only by vehicles with registered electronic toll collection (ETC) accounts**

K. Red—stop or prohibition

L. White—regulation

M. Yellow—warning

03 **These colors shall be used only as prescribed for the specific devices or applications throughout this Manual.**

Support:

04 The two colors for which general meanings have not yet been assigned are being reserved for future applications that will be determined only by the FHWA after consultation with the States, the engineering community, and the general public. The meanings described in this Section are of a general nature. More specific assignments of colors are given in the individual Parts of this Manual relating to each class of devices.

05 Tolerance limits for each color are contained in 23 CFR Part 655, Appendix to Subpart F and are available at the Federal Highway Administration's MUTCD Web site at <http://mutcd.fhwa.dot.gov>.

Section 1D.06 Public Domain, Copyrights, and Patents

Standard:

01 **Traffic control device design or application provisions contained in this Manual shall be in the public domain. Traffic control devices contained in this Manual shall not be protected by a patent, trademark, or copyright, except for the Interstate Shield, 511 Travel Information pictograph, National Scenic Byway graphic, and any items under the stewardship of or owned by FHWA. The Caltrans logos consisting of the "CT" symbol and the "Caltrans" logotype are registered service marks and when used on any traffic control device they shall be presented in a uniform and consistent manner as outlined in Caltrans' Deputy Directive DD-33-R1.**

02 **A traffic control device design or application shall not be eligible for official experimentation (see Section 1B.05) or interim approval (see Section 1B.07) unless it is in the public domain. Express abandonment of any and all forms of proprietary protection, such as patents, trademarks, or copyrights, related to the design and application of the traffic control device shall satisfy the requirement for the traffic control device to be in the public domain.**

03 **The requirement for the traffic control device to be in the public domain shall not apply to individual components used in the assembly or manufacture of the traffic control device.**

Support:

04 The limitation on patented, trademarked, or copyrighted traffic control devices applies to the message that the device conveys to the road user. If a patent or other protection covers the device's communication to the road user by virtue of its appearance, audible message, or other aspects of the message conveyed (such as the order in which traffic control signal indications change from green to yellow and red), then the device is considered to be protected and not in the public domain. Such a device is precluded from inclusion in this Manual. The purpose of this limitation is to ensure uniformity of the messaging of individually approved traffic control devices. This limitation does not apply to other aspects of a device (such as internal controls, circuitry, electronics, mechanics, or housing) so long as the appearance, audible message, or other aspects of the message conveyed, including the manner of conveyance, remain freely reproducible by all without infringing on any proprietary rights or interests. This Manual does not prohibit such other aspects of a traffic control device that meet the legal requirements from being protected through patent, trademark, or copyright; and does not restrict components, parts, manufacturing processes, or similar aspects of traffic control devices from being patented or otherwise protected. Examples of acceptable protected traffic control device components or parts might include sign sheeting or retroreflectivity technology, internal electronic components of traffic signal controllers, and breakaway sign support mechanisms.

05 Pictographs, as defined in Section 1C.02, are embedded in traffic control devices, but the pictographs themselves are not considered traffic control devices for the purposes of Paragraph 4 of this Section.

06 Business identification logos, as defined in Section 1C.02, are embedded in traffic control devices, but the logos themselves are not considered traffic control devices for the purposes of Paragraph 4 of this Section.

Section 1D.07 Advertising

Standard:

01 **Traffic control devices or their supports shall not bear any advertising message or any other message that is not related to traffic control.**

Support:

- 02 Acknowledgment signs (see Section 2H.13), Specific Service signs (see Chapter 2J), and Tourist- Oriented Directional signs (see Chapter 2K) are not considered advertising.

Section 1D.08 Abbreviations Used on Traffic Control Devices

Standard:

- 01 When the word messages shown in Table 1D-1 need to be abbreviated in connection with traffic control devices, the abbreviations shown in Table 1D-1 shall be used.
- 02 When the word messages shown in Table 1D-2 need to be abbreviated on a portable changeable message sign, the abbreviations shown in Table 1D-2 shall be used. Unless indicated by an asterisk, these abbreviations shall only be used on portable changeable message signs.

Guidance:

- 03 The abbreviations for the words listed in Table 1D-2 that also show a prompt word should not be used on a portable changeable message sign (or on a static sign if indicated in Table 1D-2 by an asterisk) unless the prompt word shown in Table 1D-2 either precedes or follows the abbreviation, as applicable.

Standard:

- 04 The abbreviations shown in Table 1D-3 shall not be used in connection with traffic control devices because of their potential to be misinterpreted by road users.

Guidance:

- 05 If Table 1D-1 or 1D-2 indicates that more than one abbreviation is allowed for a given word or phrase, the same abbreviation should be used throughout a single jurisdiction.
- 06 Except as otherwise provided in Table 1D-1 or 1D-2 or unless necessary to avoid confusion, periods, commas, apostrophes, question marks, ampersands, and other punctuation marks or characters that are not letters or numerals should not be used in any abbreviation.

Section 1D.09 Placement and Operation of Traffic Control Devices

Standard:

- 01 Before any highway, site roadway open to public travel (see definition in Section 1C.02), detour, or temporary route is opened to public travel, all traffic control devices necessary for safe operation shall be in place. **Detour signs shall be erected at the nearest points of detour from that portion of a highway, or from any bridge, which is closed to traffic while under construction or repair per CVC 21363 and Section 6I.02.**

Option:

- 02 Temporary traffic control devices, as provided for in Part 6 of this Manual, may be used in place of permanent devices that have yet to be installed for safe operation.

Guidance:

- 03 Placement of a traffic control device should be within the road user's view so that adequate visibility is provided. To aid in conveying the proper meaning, the traffic control device should be appropriately positioned with respect to the location, object, or situation to which it applies. The location and legibility of the traffic control device should be such that a road user has adequate time to make the proper response in both day and night conditions.
- 04 Traffic control devices should be placed and operated in a uniform and consistent manner as part of maintaining uniformity in traffic control.
- 04a **Traffic control devices, which are used on a part-time basis, should be in operation only during the time periods that they are required.**

Support:

- 05 Inconsistent placement or use of a device can result in disrespect for the device at locations where the device is needed and appropriate.

Guidance:

- 06 Unnecessary traffic control devices should be removed. The fact that a device is in good physical condition should

not be a basis for deferring needed removal or change.

Support:

- 07 Section 2A.02 contains information on excessive use of signs and other considerations that can reduce their effectiveness and the effectiveness of other traffic control devices.

Section 1D.10 Maintenance of Traffic Control Devices

Guidance:

- 01 *Functional maintenance of traffic control devices should be used to determine if **certain** devices need to be changed to meet current traffic conditions.*
- 02 *Physical maintenance of traffic control devices should be performed to **retain the** legibility and visibility of the device, and to retain the proper functioning of the device.*

Support:

- 03 Clean, legible, properly mounted devices in good working condition command the **respect** of road users.

Section 1D.11 Crashworthiness of Traffic Control Devices and Other Roadside Appurtenances

Standard:

- 01 **In accordance with various Sections of this Manual, **certain traffic control devices and their supports, and/or related appurtenances shall be crashworthy** (see definition in **Section 1C.02**). **Crashworthiness provisions in this Manual shall apply to all streets, highways, and site roadways open to public travel.****

Support:

- 02 Roadside appurtenances include permanent and portable sign supports, other permanent or temporary traffic control devices, and other roadside fixtures that are not traffic control devices, such as longitudinal barriers, bridge railings, and crash cushions, within the clear zone. Crashworthiness of a device or appurtenance is determined by nationally established standards such as the “Manual for Assessing Safety Hardware” (MASH), 2016, AASHTO. Information on the FHWA’s policy on crashworthiness of devices on the National Highway System and other roadways is available at the FHWA Office of Safety Web site at https://safety.fhwa.dot.gov/roadway_dept/countermeasures/reduce_crash_severity/policy_memo_guidance.cf m.
- 03 Refer to Caltrans’ Traffic Safety Systems Guidance and Supplement to Traffic Safety Systems Guidance for uniform practices and guidance for the traffic safety systems. See Section 1A.05 for information regarding this publication.

ATTACHMENT G

Table 1D-1. Acceptable Abbreviations
General Abbreviations

Word Message	Standard Abbreviation
Afternoon / Evening	PM
Alternate	ALT
AM Radio	AM
Avenue	Ave, Av*
Bicycle(s)	BIKE, BIKES
Boulevard	Blvd*
Bridge	(See Table 1D-2)
CB Radio	CB
Center	Ctr**
Circle	Cir*
Civil Defense	CD
Compressed Natural Gas	CNG
Court	Ct*
Crossing (other than highway-rail)	X-ING
Drive	Dr*
East	E
Electric Vehicle	EV
Expressway	Expwy*
Feet	FT
FM Radio	FM
Freeway	Fwy*
Hazardous Material(s)	HAZMAT, HAZMATs
High Occupancy Vehicle(s)	HOV
Highway	Hwy*
Hospital	HOSP
Hour(s)	HR, HRS
Information	INFO
Inherently Low Emission Vehicle	ILEV
International	Intl
Interstate	(See Table 1D-2)
Junction / Intersection	JCT
Lane	(See Table 1D-2)
Liquefied Petroleum Gas	LP-GAS
Maximum	MAX

Word Message	Standard Abbreviation
Mile(s)	MI
Miles per Hour	MPH
Minimum	MIN
Minute(s)	MIN, MINS
Morning / Late Night	AM
Mount	Mt**
Mountain	Mtn**
National	Natl**
North	N
Northeast	NE
Northwest	NW
Parkway	Pkwy*
Pedestrian(s)	PED, PEDS
Place	Pl*
Pounds	LBS
Road	Rd*
Saint	St**
South	S
Southeast	SE
Southwest	SW
State, county, or other non-US or non-Interstate numbered route	(See Table 1D-2)
Street	St*
Telephone	PHONE
Temporary	TEMP
Terrace	Ter*
Thruway	Thwy*
Ton(s)	T
Trail	Tr*
Turnpike	Tpk*
Two-Way Intersection, Two-Way Traffic	2-WAY
US Numbered Route	(See Table 1D-2)
West	W

Days of the Week

Day	Standard Abbreviation
Sunday	SUN
Monday	MON
Tuesday	TUES***
Wednesday	WED

Day	Standard Abbreviation
Thursday	THURS***
Friday	FRI
Saturday	SAT

* Abbreviation shall not be used for any application other than the name of a roadway. See Table 2D-3 for complete list of street name descriptors. Examples include: Bayshore Fwy, Cross County Hwy, Mid-County Pkwy

** Abbreviation shall not be used for any application other than as a descriptor or title within a proper name. Examples include: Vestal Ctr, Mt Hope, Pocono Mtn, Eldorado Natl Forest, St Louis

*** Tuesday and Thursday may be abbreviated on a Changeable Message Sign (CMS) to TUE and THU, respectively, when the number of Characters in a message to be displayed cannot be practically reduced through rewording to fit the number of characters supported by the CMS, such as might occur at times on a portable CMS.

Note: Abbreviations shown in upper- and lower-case lettering may be in all upper-case lettering when displayed on a changeable message sign with lower resolution that will not accommodate lower-case letter forms. See Chapter 2L of this Manual.

Table 1D-2. Abbreviations that Shall be Used Only for Temporary Messages on Portable Changeable Message Signs (Sheet 1 of 2)



Word Message	Standard Abbreviation	Prompt Word Preceding the Abbreviation	Prompt Word Following the Abbreviation	Example
Access	ACCS	—	Road	ACCS ROAD
Ahead	AHD	Fog	—	FOG AHD
Blocked	BLKD	Lane	—	2 LANES BLKD
Bridge	BR*	[Name]	—	BAY BR
Cannot	CANT	—	—	—
Center	CNTR	—	Lane	CNTR LANE, CNTR LN
Chemical	CHEM	—	Spill	CHEM SPILL
Condition	COND	Traffic	—	TRAFFIC COND
Congested	CONG	Traffic	—	TRAFFIC CONG AHD
Construction	CONST	—	Ahead	CONST AHEAD
Crossing	XING	—	—	PED XING
Do Not	DONT	—	—	—
Downtown	DWNTN	—	Traffic	DWNTN TRAFFIC
Eastbound	EAST	Route Number, Road Name	—	I-4 EAST
	E-BND	—	Lane, Traffic	E-BND LANE
Emergency	EMER	—	—	EMER VEHICLES
Entrance, Enter	ENT	—	—	ENT TO I-90
Exit	EX	Next	—	NEXT EX
Express	EXP	—	Lane	EXP LANE OPEN
Frontage	FRNTG	—	Road	FRNTG RD
Hazardous	HAZ	—	Driving	HAZ DRIVING
Highway-Rail Grade Crossing	RR XING	—	—	RR XING
Interstate	I-*	—	[Number]	I-80
It Is	ITS	—	—	—
Lane(s) (travel lanes of a highway)	LN, LNS	Right, Left, Center	—	LEFT LN ONLY 2 RIGHT LNS
Left	LFT	Keep, Next	—	NEXT LFT
	LFT	—	Lane	LFT LANE
Local	LOC	—	Traffic	LOC TRAFFIC ONLY
Lower	LWR	—	Level	LWR LEVEL
Maintenance	MAINT	—	—	ROAD MAINT
Major	MAJ	—	Crash	MAJ CRASH
Minor	MNR	—	Crash	MNR CRASH
Normal	NORM	—	—	—
Northbound	NORTH	Route Number, Road Name	—	US 1 NORTH
	N-BND	—	Lane, Traffic	N-BND TRAFFIC
Oversized	OVRSZ	—	Load	OVRSZ LOAD
Parking	PKING	—	—	—
Pavement	PVMT	Icy	—	ICY PVMT
Prepare	PREP	—	To Stop	PREP TO STOP
Quality	QLTY	Air	—	AIR QLTY
Right	RT	Keep, Next	—	KEEP RT
	RT	—	Lane	RT LANE
Road Work	WK	—	Ahead, [Distance]	RD WK 1 MILE
Route	RTE	Best	—	BEST RTE
Service	SERV	—	—	SERV AREA OPEN
Shoulder	SHLDR	—	—	SHLDR CLOSED

Table 1D-2. Abbreviations that Shall be Used Only for Temporary Messages on Portable Changeable Message Signs (Sheet 2 of 2)

Word Message	Standard Abbreviation	Prompt Word Preceding the Abbreviation	Prompt Word Following the Abbreviation	Example
Slippery	SLIP	—	—	—
Southbound	SOUTH	Route Number, Road Name	—	CA 1 SOUTH
	S-BND	—	Lane, Traffic	S-BND TRAFFIC
Speed	SPD	—	—	SPD LIMIT
State, County, or other non-U.S. or non-Interstate numbered route	[Route Abbreviation determined by highway agency]*	—	[Number]**	NY 7, CR 43
Tires With Lugs	LUGS	—	—	—
Traffic	TRAF	—	—	—
Travelers	TRVLRS	—	—	—
Two-Wheeled Vehicles	CYCLES	—	—	—
Upper	UPR	—	Level	UPR LEVEL
U.S. Numbered Route	US*	—	[Number]**	US 202
Vehicle(s)	VEH, VEHS	—	—	—
Warning	WARN	—	—	—
Westbound	WEST	Route Number, Road Name	—	IL 53 WEST
	W-BND	—	Lane, Traffic	W-BND LANES
Will Not	WONT	—	—	—

* Abbreviation, when accompanied by the prompt word, may be used on traffic control devices other than portable message signs. See Table 1D-1 for uses and format.

** A space and no hyphen shall be placed between the abbreviation and the number of the route.

Note: See Chapter 2L of this Manual for additional information on changeable message signs.

Table 1D-3. Unacceptable Abbreviations

Abbreviation	Intended Word	Common Misinterpretation
ACC	Accident	Access (Road)
CLRS	Clears	Colors
DLY	Delay	Daily
FDR	Feeder	Federal
L	Left	Lane (Merge)
LT	Light (Traffic)	Left
PARK	Parking	Park
POLL	Pollution (Index)	Poll
RED	Reduce	Red
STAD	Stadium	Standard
WRNG	Warning	Wrong

ATTACHMENT H

#	CA MUTCD 2026 Part 1 Public Comment	SME WG Review - Discussions & Recommendation	CA MUTCD Part/Topic Owner and/or SME WG Lead	Resolution of Public Comment (CTCDC Agenda Item)
1	In Chapter 1D, Section 1D.01, Paragraph #04, second sentence needs to be revised to delete text "an" and pluralize text "elements" as blue text has added other elements in addition to "Vehicle Speed". Refer to CA MUTCD 2014R8 Section 1A.02, Paragraph #03, second sentence text. Revised sentence should read "Vehicle speed, geometrics and other relevant factors and road-user types should be carefully considered as elements that governs the design, operation, placement, and location of various traffic control devices."	12/26/24: No SME WG Review, as comment reflects current CA MUTCD 2014R8 text, which was inadvertently omitted in the initil draft. Comment shared with SME WG members to inform them and ensure consensus and agreement on resolution. Agree. Upon comparison with current CA MUTCD 2014R8 Section 1A.02 paragraph #03, agree that this is an error. In CA MUTCD 2026 Section 1D.01, Paragraph #04 second sentence will be revised with a minor change in text from what was reflected in CA MUTCD 2014R8 Section 1A.02 paragraph #03 second sentence text. CA MUTCD 2026 Section 1D.01, Paragraph #04 second sentence will delete text "an element" using black strikethrough and add blue text "elements". It will also delete text "governs" using black strikethrough and add blue text "govern". ACTION: CA MUTCD 2026 Section 1D.01, Paragraph #04 second sentence text is revised as "Vehicle speed, geometrics and other relevant factors and road-user types should be carefully considered as an element elements that governs govern the design, operation, placement, and location of various traffic control devices."	12/26/24: Gurinderpal (Johnny) Bhullar, CA MUTCD Part 1 Owner - Agreed with comment review and recommendations. ACTION: CA MUTCD 2026 Section 1D.01, Paragraph #04 second sentence text is revised as "Vehicle speed, geometrics and other relevant factors and road-user types should be carefully considered as an element elements that governs govern the design, operation, placement, and location of various traffic control devices."	12/26/24: ACTION: CA MUTCD 2026 Section 1D.01, Paragraph #04 second sentence text is revised as "Vehicle speed, geometrics and other relevant factors and road-user types should be carefully considered as an element elements that governs govern the design, operation, placement, and location of various traffic control devices."
2	In Chapter 1A, Section 1A.06, Paragraph #02, at the end of the sentence, add text "and California Vehicle Code (CVC)", to be consistent with CA MUTCD 2014R8 Section 1A.02, Paragraph #05.	12/26/24: No SME WG Review, as comment reflects current CA MUTCD 2014R8 text, which was inadvertently omitted in the initil draft. Comment shared with SME WG members to inform them and ensure consensus and agreement on resolution. Agree. Upon comparison with current CA MUTCD 2014R8 Section 1A.02 paragraph #05, agree that this is an error and an inadvertent omission, it should have been included. In CA MUTCD 2026 Section 1A.06, Paragraph #02 second sentence will be revised by adding blue text "and California Vehicle Code (CVC)." at the end of this sentence. In addition, per CA MUTCD format, blue vertical line will be added in the right margin of paragraph #02. ACTION: CA MUTCD 2026 Section 1A.06, Paragraph #02 second sentence text is revised as "<i>The actions required of road users to obey regulatory devices should be specified by State statute, or in cases not covered by State statute, in local ordinances or resolutions. Such statutes, ordinances, and resolutions should be consistent with the “Uniform Vehicle Code.” and “California Vehicle Code” (CVC).</i>" and blue vertical line is added in the right margin of paragraph #02.	12/26/24: Gurinderpal (Johnny) Bhullar, CA MUTCD Part 1 Owner - Agreed with comment review and recommendations. ACTION: CA MUTCD 2026 Section 1A.06, Paragraph #02 second sentence text is revised as "<i>The actions required of road users to obey regulatory devices should be specified by State statute, or in cases not covered by State statute, in local ordinances or resolutions. Such statutes, ordinances, and resolutions should be consistent with the “Uniform Vehicle Code.” and “California Vehicle Code” (CVC).</i>" and blue vertical line is added in the right margin of paragraph #02.	12/26/24: ACTION: CA MUTCD 2026 Section 1A.06, Paragraph #02 second sentence text is revised as "<i>The actions required of road users to obey regulatory devices should be specified by State statute, or in cases not covered by State statute, in local ordinances or resolutions. Such statutes, ordinances, and resolutions should be consistent with the “Uniform Vehicle Code.” and “California Vehicle Code” (CVC).</i>" and blue vertical line is added in the right margin of paragraph #02.
3	Section 1A.13 Page: 67+ Comment: Add definition of electric bicycles This is missing and the MUTCD will need to eventually start addressing this	12/26/24: No SME WG Review, as comment was already addressed in draft document already posted (on 8/19/24), prior to this comment submittal. Comment shared with SME WG members to inform them and ensure consensus and agreement on resolution. Agree that the definition of "electric bicycle" is not included in current CA MUTCD 2014R8. No Action is needed in response to this comment as the new CA MUTCD 2026 Part 1 draft documents prepared and posted on 8/19/24 on Caltrans webpage and made open to public, already includes this suggested definition for "electric bicycle", amongst multiple other newly added Califronia law specific CVC definitions. This CA MUTCD 2026 Part 1 documents were prepared after reviewing the National MUTCD 2023 (11th Edition) to adopt it and posted on Caltrans NMUTCD 2023 review and adoption webpage. Refer to CA MUTCD 2026 Section 1C.02 definition #71a for "Electric Bicycle" based on CVC 312.5(a) in document titled "1C - Definitions, Acronyms, and Abbreviations Used in This Manual (Text)" posted at https://dot.ca.gov/programs/safety-programs/camutcd/nmutcd or directly at "https://dot.ca.gov/-/media/dot-media/programs/safety-programs/documents/ca-mutcd/nmutcd/part1/202408-camutcd-2026-1c-a11y.pdf". ACTION: No Action is needed.	12/26/24: Gurinderpal (Johnny) Bhullar, CA MUTCD Part 1 Owner - Agrees that no further action is needed. ACTION: No Action needed.	12/26/24: ACTION: No Action needed.